PREDICTED ENERGY ASSESSMENT

Aeratech Ltd
Air leakage testing and energy services

Plot 114, Millfield Nurseries, Spalding Common,
Spalding,
Lincs,
PE11 3AU

Dwelling type:	House, Semi-Detached
Date of assessment:	19/05/2022
Produced by:	Jake Eaton
Total floor area:	84.76 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

Energy Efficiency Rating

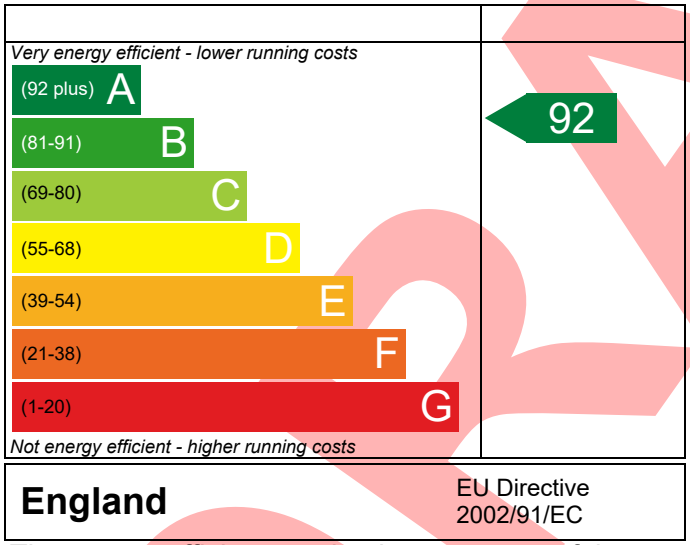

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO_2) Rating

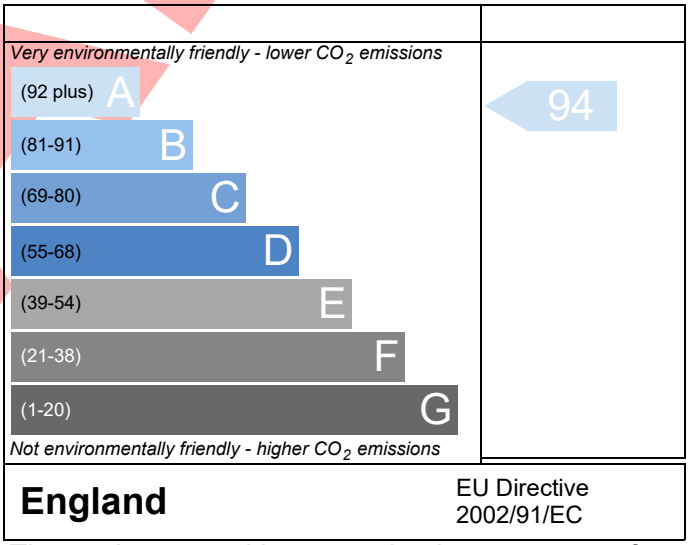

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE
Calculation Type: New Build (As Designed)

Aeratech Ltd
Air leakage testing and energy services

Property Reference	PE11 3AU Plot 114	**Issued on Date**	19/05/2022
Assessment Reference	001	**Prop Type Ref**	Type E2G Semi
Property	Plot 114, Millfield Nurseries, Spalding Common, Spalding, Lincs, PE11 3AU		

SAP Rating	92 A	**DER**	8.70	**TER**	17.82
Environmental	94 A	**% DER<TER**	51.19		
CO_2 Emissions (t/year)	0.51	**DFEE**	43.20	**TFEE**	50.60
General Requirements Compliance	Pass	**% DFEE<TFEE**	14.63		

Assessor Details	Mr. Jake Eaton, Jake Eaton, Tel: 01400283471, jake@aeratech.co.uk	**Assessor ID**	P711-0001
Client			

SUMARY FOR INPUT DATA FOR New Build (As Designed)

Criterion 1 – Achieving the TER and TFEE rate

1a TER and DER

Fuel for main heating	Mains gas		
Fuel factor	1.00 (mains gas)		
Target Carbon Dioxide Emission Rate (TER)	17.82	$kgCO_2/m^2$	
Dwelling Carbon Dioxide Emission Rate (DER)	8.70	$kgCO_2/m^2$	Pass
	-9.12 (-51.2%)	$kgCO_2/m^2$	

1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE)	50.60	$kWh/m^2/yr$	
Dwelling Fabric Energy Efficiency (DFEE)	43.20	$kWh/m^2/yr$	
	-7.4 (-14.6%)	$kWh/m^2/yr$	Pass

Criterion 2 – Limits on design flexibility

Limiting Fabric Standards

2 Fabric U-values

Element	Average	Highest	
External wall	0.23 (max. 0.30)	0.23 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Floor	0.12 (max. 0.25)	0.12 (max. 0.70)	Pass
Roof	0.13 (max. 0.20)	0.13 (max. 0.35)	Pass
Openings	1.37 (max. 2.00)	1.40 (max. 3.30)	Pass

2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

3 Air permeability

Air permeability at 50 pascals	5.01 (design value)	$m^3/(h.m^2)$ @ 50 Pa	
Maximum	10.0	$m^3/(h.m^2)$ @ 50 Pa	Pass

Limiting System Efficiencies

4 Heating efficiency

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 24 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%		Pass
Secondary heating system	None		

5 Cylinder insulation

Hot water storage	No cylinder		

6 Controls

Space heating controls	Programmer, room thermostat and TRVs		Pass
Hot water controls	No cylinder		
Boiler interlock	Yes		Pass

7 Low energy lights

Percentage of fixed lights with low-energy fittings	100	%	
Minimum	75	%	Pass

8 Mechanical ventilation

Continuous extract system (decentralised)			
Specific fan power	0.1100 0.1400		
Maximum	0.7		Pass

Criterion 3 – Limiting the effects of heat gains in summer

9 Summertime temperature

Overheating risk (East Pennines)	Not significant	Pass

Based on:

Overshading	Average
Windows facing North Windows facing South Windows facing West	2.57 m², No overhang 4.54 m², No overhang 7.36 m², No overhang
Air change rate	4.00 ach
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight hours

Criterion 4 – Building performance consistent with DER and DFEE rate

Party Walls

Type	U-value		
Filled Cavity with Edge Sealing	0.00	W/m²K	Pass

Air permeability and pressure testing

3 Air permeability

Air permeability at 50 pascals	5.01 (design value)	m³/(h.m²) @ 50 Pa	
Maximum	10.0	m³/(h.m²) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

10 Key features

Party wall U-value	0.00	W/m²K
Floor U-value	0.12	W/m²K
Photovoltaic array	1.80	kW

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.