

PREDICTED ENERGY ASSESSMENT


K, WC, 2B, 1Ba

Dwelling type: Flat, End-Terrace
 Date of assessment: 15/10/2020
 Produced by: Ross Elliott
 Total floor area: 70.91 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.


Energy Efficiency Rating

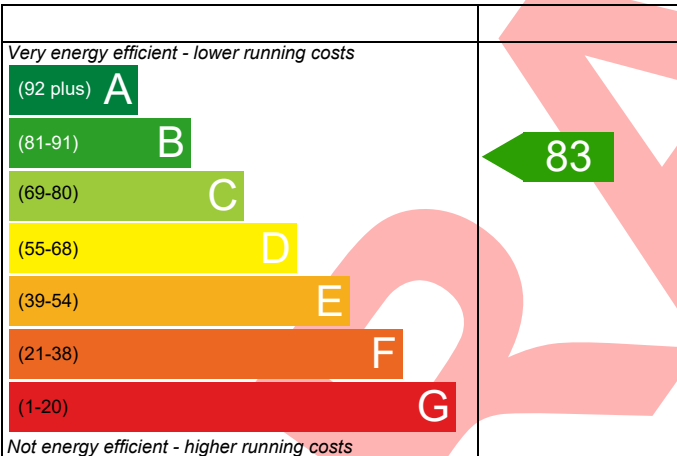

England EU Directive 2002/91/EC

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

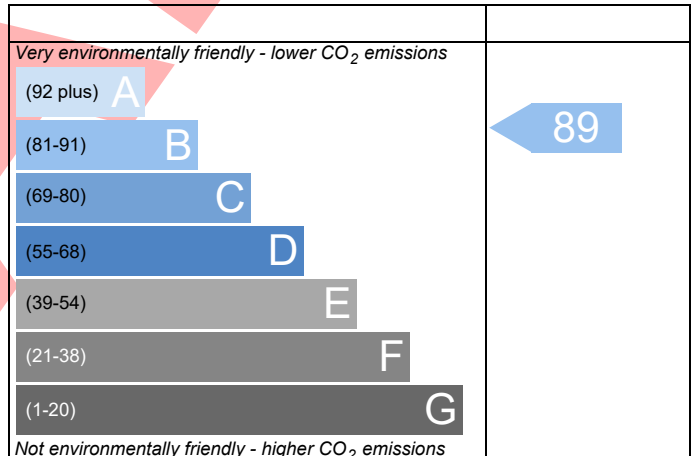

England EU Directive 2002/91/EC

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE

Calculation Type: New Build (As Designed)



Property Reference	4907-0025-4352-225	Issued on Date	15/10/2020
Assessment Reference	Plot 225	Prop Type Ref	1FF End V1 (As)
Property	K, WC, 2B, 1Ba		

SAP Rating	83 B	DER	15.71	TER	21.11
Environmental	89 B	% DER<TER	25.59		
CO ₂ Emissions (t/year)	0.88	DFEE	57.17	TFEE	63.43
General Requirements Compliance	Pass	% DFEE<TFEE	9.88		

Assessor Details	Mr. Andrew McManus, Andrew McManus, Tel: 01455 883250, andrew.mcmanus@aessc.co.uk	Assessor ID	P639-0001
------------------	---	-------------	-----------

Client	
--------	--

SUMMARY FOR INPUT DATA FOR New Build (As Designed)

Criterion 1 – Achieving the TER and TFEE rate

1a TER and DER

Fuel for main heating	Mains gas		
Fuel factor	1.00 (mains gas)		
Target Carbon Dioxide Emission Rate (TER)	21.11	kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission Rate (DER)	15.71	kgCO ₂ /m ²	Pass
	-5.40 (-25.6%)	kgCO ₂ /m ²	

1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE)	63.43	kWh/m ² /yr	
Dwelling Fabric Energy Efficiency (DFEE)	57.17	kWh/m ² /yr	
	-6.2 (-9.8%)	kWh/m ² /yr	Pass

Criterion 2 – Limits on design flexibility

Limiting Fabric Standards

2 Fabric U-values

Element	Average	Highest	
External wall	0.21 (max. 0.30)	0.28 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Floor	0.14 (max. 0.25)	0.14 (max. 0.70)	Pass
Openings	1.22 (max. 2.00)	1.36 (max. 3.30)	Pass

2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

3 Air permeability

Air permeability at 50 pascals	4.00 (design value)	m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0	m ³ /(h.m ²) @ 50 Pa	Pass

Limiting System Efficiencies

4 Heating efficiency

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE

Calculation Type: New Build (As Designed)

Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Vaillant ecoFIT sustain 830 VUW 306/6-3 (H-GB) Combi boiler Efficiency: 89.3% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	

5 Cylinder insulation

Hot water storage	No cylinder	
-------------------	-------------	--

6 Controls

Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass

7 Low energy lights

Percentage of fixed lights with low-energy fittings	100	%	
Minimum	75	%	Pass

8 Mechanical ventilation

Continuous supply and extract system			
Specific fan power	0.56		
Maximum	1.5		Pass
MVHR efficiency	92	%	
Minimum	70	%	Pass

Criterion 3 – Limiting the effects of heat gains in summer

9 Summertime temperature

Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North East	12.77 m ² , No overhang	
Windows facing North West	2.18 m ² , Overhang width less than twice window, ratio 0.55	
Air change rate	4.00 ach	
Blinds/curtains	None	

Criterion 4 – Building performance consistent with DER and DFEE rate

Party Walls

Type	U-value		
Filled Cavity with Edge Sealing	0.00	W/m ² K	Pass
Solid Wall	0.00	W/m ² K	Pass

Air permeability and pressure testing

3 Air permeability

Air permeability at 50 pascals	4.00 (design value)	m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0	m ³ /(h.m ²) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE
Calculation Type: New Build (As Designed)



10 Key features

Party wall U-value	0.00	W/m ² K
Party wall U-value	0.00	W/m ² K
Photovoltaic array	503.01	kWh/Year

DRAFT

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

RECOMMENDATIONS

	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 83	B 89	

DRAFT

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.