PREDICTED ENERGY ASSESSMENT



FT-02a, Plot 185, Dwelling type: Flat, End-Terrace

Reading, Date of assessment: 16/03/2019
Berkshire Produced by: Southern F

Produced by: Southern Energy Consultants


Limited

Total floor area: 70.14 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

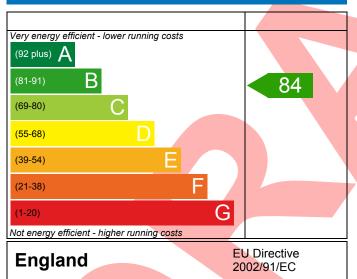

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

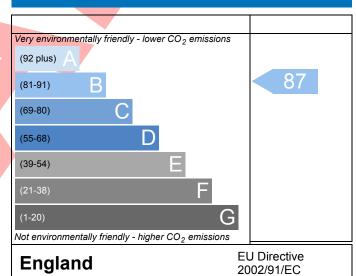

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	SECPMW002a				Issued on Date	16/03/201		
Assessment	001 Prop Type Ref GFF							
Reference Property	FT-02a, Plot 185, Re	ading Barkshira						
	11-02a, Flot 185, Ne		1					
SAP Rating		84 B	DER	18.07	TER	19.60		
Environmental		87 B	% DER <ter< td=""><td>47/27</td><td>7.82</td><td>F2 70</td></ter<>	47/27	7.82	F2 70		
CO₂ Emissions (t/year General Requirement	-	1.03 Pass	DFEE % DFEE <tfee< td=""><td>47.37</td><td>11.94</td><td>53.79</td></tfee<>	47.37	11.94	53.79		
			70 DILENTEE			14.00.000		
	hen Smith, Tel: 016352				Assessor ID	d168-0001		
	vay Homes Thames Va	•						
UMARY FOR INPUT D	ATA FOR New Build (A	As Designed)						
riterion 1 – Achieving	the TER and TFEE rate	e						
a TER and DER								
Fuel for main heatir	Mains g	as						
Fuel factor		1.00 (ma	ains gas)					
Target Carbon Diox		19.60 kgCO ₂ /m ²						
Dwelling Carbon Did		18.07 kgCO ₂ /m ²						
h TEEE and DEEE		-1.53 (-7	7.8%)		kgCO₂/m²			
b TFEE and DFEE	v Efficiency (TEEE)	53.79			kWh/m²/yr			
Target Fabric Energ Dwelling Fabric Ene		47.37 kWh/m²/yr						
Dwelling rabile life	rgy Efficiency (DI LL)	-6.4 (-11	9%)	7	kWh/m²/yr			
riterion 2 – Limits on	design flexibility		,,,,,,		,, , , ,	. 465		
Limiting Fabric Star	ndards							
2 Fabric U-values								
Element		Average	н	ighest				
External wall		0.22 (max. 0.30)		25 (max. 0.70)	Pass		
Party wall		0.00 (max. 0.20)		-				
Floor		0.11 (max. 0.25)	0.	11 (max. 0.70	Pass			
Openings		1.24 (max. 2.00)	24 (max. 2.00) 1.30 (max.			Pass		
2a Thermal bridging	g							
Thermal bridgin	g calculated from linea	ar thermal transmit	tances for each jui	nction				
3 Air permeability		7						
Air permeability	at 50 pascals	5.00 (de	sign value)		m³/(h.m²) @ 50 Pa			
Maximum	10.0			m ³ /(h.m ²) @ 50 Pa Pass				
Limiting System Eff	iciencies							
Lillium System Lil	iciciicic3							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.08r10

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None	
	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1600 0.1600	
Maximum	0.7	Pass
and the second s		
Criterion 3 – Limiting the effects of heat gains in sum	nmer	
Criterion 3 – Limiting the effects of heat gains in sum 9 Summertime temperature	nmer	
	Slight	Pass
9 Summertime temperature		Pass
9 Summertime temperature Overheating risk (Thames Valley)		Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on:	Slight	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading	Slight	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East	Slight Average 9.04 m², No overhang	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate	Slight Average 9.04 m², No overhang 4.00 ach None	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains	Slight Average 9.04 m², No overhang 4.00 ach None	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D	Slight Average 9.04 m², No overhang 4.00 ach None	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls	Slight Average 9.04 m², No overhang 4.00 ach None PER and DFEE rate	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls Type	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value	
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value	
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value	
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value 0.00 W/m²K	
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value 0.00 W/m²K	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 - Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value 0.00 W/m²K	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 – Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum 10 Key features	Slight Average 9.04 m², No overhang 4.00 ach None DER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) 10.0	Pass
9 Summertime temperature Overheating risk (Thames Valley) Based on: Overshading Windows facing East Air change rate Blinds/curtains Criterion 4 - Building performance consistent with D Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum 10 Key features Party wall U-value	Slight Average 9.04 m², No overhang 4.00 ach None U-value 0.00 W/m²K 5.00 (design value) 10.0	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.08r10

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmenta I impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 84	B 87	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.08r10