PREDICTED ENERGY ASSESSMENT




Plot 086, 3 Bed, K, WC, B, ES Dwelling type: Date of assessment: Produced by: Total floor area:

House, Mid-Terrace 05/11/2020 Eloise Utley 114.08 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

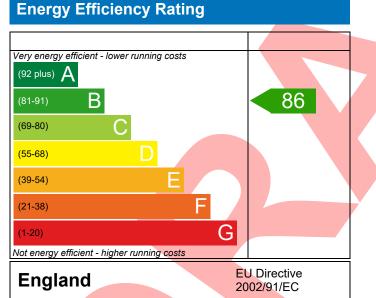

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating



The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Page 1 of 4

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Reference								
Property	Plot 086, 3 Bed, K,	WC, B, ES						
SAP Rating			86 B	DER	14.39	TER	15.17	
Environmental			88 B	% DER <ter< td=""><td></td><td>5.17</td><td></td></ter<>		5.17		
CO₂ Emissions (t/year)			1.35	DFEE	39.37	TFEE	43.26	
General Requirements Compliance			Pass % DFEE <tfee 9.00<="" td=""><td></td></tfee>					
	r. Silvio Junges, Silvio vio.junges@aessout	-		242050,		Assessor ID	T714-0001	
Client	iker Estates							
UMARY FOR INPUT DA	ATA FOR New Build	(As Design	ed)					
riterion 1 – Achieving	the TER and TFEE ra	te						
a TER and DER								
Fuel for main heatin	g		Mains g	as				
Fuel factor			1.00 (ma	ains gas)				
Target Carbon Dioxi	de Emission Rate (TE	R)	15.17			kgCO ₂ /m ²		
Dwelling Carbon Dioxide Emission Rate (DER)		DER)	14.39			kgCO ₂ /m ²	Pass	
			-0.78 (-5	5.1%)		kgCO ₂ /m ²		
b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)			43.26			kWh/m²/yr		
Dwelling Fabric Ener	rgy Efficiency (DFEE)		39.37			kWh/m²/yr		
			-3.9 (-9.	0%)		kWh/m²/yr	Pass	
Criterion 2 – Limits on o				-				
Limiting Fabric Stan	dards							
<u>2 Fabric U-values</u>								
Element		Average			Highest			
External wall		0.27 (ma			0.35 (max. 0.7	0)	Pass	
Party wall		0.00 (ma			-		Pass	
Floor		`	nax. 0.25) 0.16 (max. 0.70)			Pass Pass		
Roof		0.16 (ma				.23 (max. 0.35)		
			ax. 2.00) 1.70 (max. 3.			0)	Pass	
2a Thermal bridging								
	g calculated from line	ear therma	al transmit	tances for each	junction			
<u>3 Air permeability</u>						_		
Air permeability at 50 pascals			5.01 (design value)			m³/(h.m²) @ 50 Pa		
Maximum			10.0			m³/(h.m²) @ 50 Pa	Pass	
	ciencies							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains ga	is Pass		
	Data from database			
	Ideal LOGIC COMBI ESP1 35			
	Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system				
5 Cylinder insulation	None			
	No. ex dia deg			
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Time and temperature zone control	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
	mmer			
iterion 3 – Limiting the effects of heat gains in su	mmer			
iterion 3 – Limiting the effects of heat gains in su Summertime temperature		Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England)	mmer Not significant	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England)	Not significant	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) used on: Overshading	Not significant Average	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) used on:	Not significant	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) sed on: Overshading Windows facing North	Not significant Average 7.02 m², No overhang	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) used on: Overshading Windows facing North Windows facing South	Not significant Average 7.02 m ² , No overhang 5.67 m ² , No overhang	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing North Windows facing South Air change rate	Not significant Average 7.02 m ² , No overhang 5.67 m ² , No overhang 3.00 ach None	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) used on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains	Not significant Average 7.02 m ² , No overhang 5.67 m ² , No overhang 3.00 ach None	Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with	Not significant Average 7.02 m ² , No overhang 5.67 m ² , No overhang 3.00 ach None	Pass		
iterion 3 – Limiting the effects of heat gains in sur <u>Summertime temperature</u> Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate			
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value			
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value			
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value	K Pass		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00	K Pass		
terion 3 – Limiting the effects of heat gains in sur <u>Summertime temperature</u> Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability at 50 pascals Maximum	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m² 5.01 (design value) m³/(h.m²) @	K Pass		
terion 3 – Limiting the effects of heat gains in sur <u>Summertime temperature</u> Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m² 5.01 (design value) m³/(h.m²) @ 10.0 m³/(h.m²) @	K Pass 50 Pa 50 Pa 50 Pa Pass		
terion 3 – Limiting the effects of heat gains in sur <u>Summertime temperature</u> Overheating risk (South West England) sed on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability at 50 pascals Maximum	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m² 5.01 (design value) m³/(h.m²) @ 10.0 m³/(h.m²) @	K Pass 50 Pa 50 Pa 50 Pa K		
iterion 3 – Limiting the effects of heat gains in sur Summertime temperature Overheating risk (South West England) ased on: Overshading Windows facing North Windows facing South Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features Party wall U-value	Not significant Average 7.02 m², No overhang 5.67 m², No overhang 3.00 ach None DER and DFEE rate U-value 0.00 W/m² 5.01 (design value) m³/(h.m²) @ 10.0 m³/(h.m²) @	K Pass 250 Pa Pass 250 Pa Pass X K X K		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£32	B 87	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£365	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£397	A 95	A 97	
Totals	17,500 - 111,500	1397	A 95	A 57	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

