
### PREDICTED ENERGY ASSESSMENT



153, 3 Bed, K, WC, Ba, En Dwelling type: Date of assessment: Produced by: Total floor area: House, Mid-Terrace 15/01/2021 Jonathan Platt 105.5 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

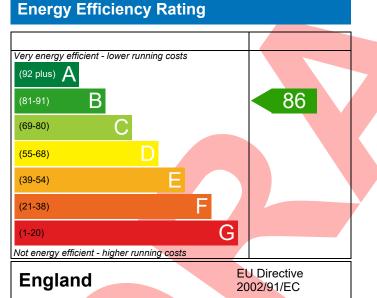

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

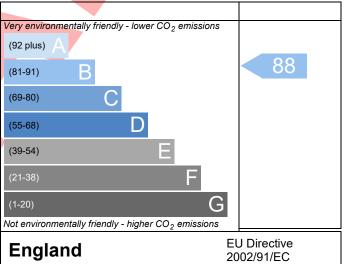

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property Reference	4907-0027-4922-15	3				Issued on Date	15/01/2021			
Assessment	153	Prop Type Ref Richmond V2 Mid (Op)								
Reference										
Property	153, 3 Bed, K, WC, E	Ba, En								
SAP Rating			86 B	DER	14.65	TER	15.55			
Environmental			88 B	% DER <ter< td=""><td></td><td>5.80</td><td></td></ter<>		5.80				
CO₂ Emissions (t/yea	r)		1.38	DFEE	41.72	41.72 TFEE				
General Requirements Compliance			Pass	% DFEE <tfee< td=""><td></td><td colspan="3">9.67</td></tfee<>		9.67				
	Mr. Jonathan Platt, Jona jonathan.platt@aessc.c		t, Tel: 018	84 242 050,		Assessor ID	P641-0001			
Client										
UMARY FOR INPUT	DATA FOR New Build (/	As Design	ed)							
riterion 1 – Achievin	g the TER and TFEE rat	e								
a TER and DER										
Fuel for main heat	ing		Mains ga	as						
Fuel factor	-		1.00 (ma							
Target Carbon Dio	xide Emission Rate (TEF	२)	15.55			kgCO <sub>2</sub> /m <sup>2</sup>				
Dwelling Carbon Dioxide Emission Rate (DER)			14.65			kgCO <sub>2</sub> /m <sup>2</sup>	Pass			
			-0.90 (-5	.8%)		kgCO <sub>2</sub> /m <sup>2</sup>				
b TFEE and DFEE										
Target Fabric Ener	gy Efficiency (TFEE)		46.19			kWh/m²/yr				
Dwelling Fabric Energy Efficiency (DFEE)			41.72 kWh/m²/yr							
			-4.5 (-9.7	7%)		kWh/m²/yr	Pass			
riterion 2 – Limits oi	n design flexibility									
Limiting Fabric Sta	Indards									
2 Fabric U-values										
Element		Average			Highest					
External wa	all	0.28 (ma	x. 0.30)		0.28 (max. 0.7	0)	Pass			
Party wall		0.00 (ma			-	- /	Pass			
Floor			(max. 0.25) 0.14 (max. 0			0)	Pass			
Roof			(max. 0.20) 0.25 (ma			5)	Pass			
Openings			(max. 2.00) 1.40 (max.			,				
2a Thermal bridgi	ng		-							
	ng calculated from line	ar therma	l transmit	tances for each	junction					
3 Air permeability	-				]					
Air permeabilit			6.00 (de	sign value)		m³/(h.m²) @ 50 Pa	1			
			10.00 (ue	SIGIT VALUE		$m^{3}/(h.m^{2}) @ 50 Pa$				
			10.0				rass			
Maximum Limiting System E	ficianciac									

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database			
	Ideal LOGIC COMBI ESP1 35			
	Combi boiler			
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None			
<u>5 Cylinder insulation</u>				
Hot water storage	No cylinder			
6 Controls				
Space heating controls	Time and temperature zone control	Pass		
Hot water controls	No cylinder	F d33		
Boiler interlock	Yes	Pass		
7 Low energy lights		1035		
Percentage of fixed lights with low-energy	100 %			
fittings	100 /0			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
iterion 3 – Limiting the effects of heat gains in s	summer			
iterion 5 – Linnung the effects of fleat gains in s	builliner			
	Slight	Pass		
Summertime temperature Overheating risk (East Pennines)		Pass		
Summertime temperature Overheating risk (East Pennines)		Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North	Slight Average 0.74 m², No overhang	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East	Slight Average 0.74 m <sup>2</sup> , No overhang 10.73 m <sup>2</sup> , No overhang	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South	Slight Average 0.74 m², No overhang 10.73 m², No overhang 0.74 m², No overhang	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West	Slight Average 0.74 m², No overhang 10.73 m², No overhang 0.74 m², No overhang 12.06 m², No overhang	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         4.00 ach	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         4.00 ach         None	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         4.00 ach         None	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit Party Walls	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         4.00 ach         None         ch DER and DFEE rate	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit Party Walls Type	Slight Average 0.74 m <sup>2</sup> , No overhang 10.73 m <sup>2</sup> , No overhang 0.74 m <sup>2</sup> , No overhang 12.06 m <sup>2</sup> , No overhang 12.06 m <sup>2</sup> , No overhang 4.00 ach None th DER and DFEE rate U-value			
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit Party Walls Type Filled Cavity with Edge Sealing	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         4.00 ach         None         ch DER and DFEE rate			
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Slight Average 0.74 m <sup>2</sup> , No overhang 10.73 m <sup>2</sup> , No overhang 0.74 m <sup>2</sup> , No overhang 12.06 m <sup>2</sup> , No overhang 12.06 m <sup>2</sup> , No overhang 4.00 ach None th DER and DFEE rate U-value			
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         12.06 m², No overhang         4.00 ach         None         ch DER and DFEE rate         U-value         0.00	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         12.06 m², No overhang         4.00 ach         None         W/m²K	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains iterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         12.06 m², No overhang         4.00 ach         None         W/m²K	Pass		
Summertime temperature Overheating risk (East Pennines) ased on: Overshading Windows facing North Windows facing East Windows facing South Windows facing West Air change rate Blinds/curtains riterion 4 – Building performance consistent wit Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	Slight         Average         0.74 m², No overhang         10.73 m², No overhang         0.74 m², No overhang         12.06 m², No overhang         12.06 m², No overhang         4.00 ach         None         W/m²K	Pass		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

## RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£30	B 87	B 89	Recommended
Photovoltaic	£5,000 - £8,000	£293	A 96	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£9,000 - £14,000	£323	A 96	A 97	
Totals	15,000 - 114,000	LJZJ	A JU	A ST	
				•	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

