PREDICTED ENERGY ASSESSMENT



K, 2B, 1Ba, ES,

OX


Date of assessment: 15/10/2020

Date of assessment: 15/10/2020
Produced by: Ross Elliott
Total floor area: 71.56 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

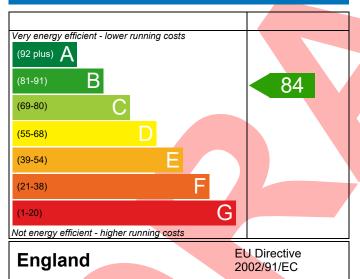

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

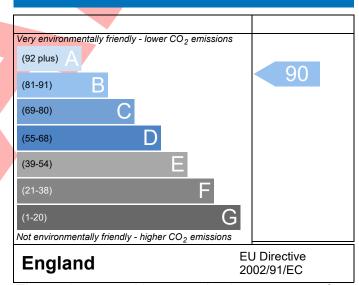

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-0025-4352-200 Plot 200		Pr	ls: op Type Ref GF	sued on Date F End V2 (As)	15/10/2020		
Reference	1101 200			op Type Net let	1 2110 12 (7.0)			
Property	K, 2B, 1Ba, ES, OX							
SAP Rating		84 B	DER	13.68	TER	18.89		
Environmental		90 B	% DER <ter< td=""><td></td><td>27.56</td><td></td></ter<>		27.56			
CO₂ Emissions (t/ye	ear)	0.82	DFEE	47.45	TFEE	52.71		
General Requireme	ents Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.98</td><td></td></tfee<>		9.98			
Assessor Details	Mr. Andrew McManus, Andrew McManus, Tel: 01455 883250, andrew.mcmanus@aessc.co.uk							
Client	Hill Western							
SUMARY FOR INPU	T DATA FOR New Build (As	Designed)						
Criterion 1 – Achiev	ing the TER and TFEE rate							
1a TER and DER								
Fuel for main he	ating	Mains ga	Mains gas					
Fuel factor	1.00 (ma	1.00 (mains gas)						
Target Carbon D	18.89	18.89 kgCO ₂ /m ²						
Dwelling Carbon	13.68	13.68 kgCO ₂ /m ²						
		-5.21 (-2	-5.21 (-27.6%) kgCO ₂ /m ²					
1b TFEE and DFEE								
_	ergy Efficiency (TFEE)	52.71		7	kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DFEE)			47.45 kW					
		-5.2 (-9.9	9%)		kWh/m²/yr	Pass		
Criterion 2 – Limits	•							
Limiting Fabric S								
2 Fabric U-value	<u>s</u>							
Element		verage		ighest				
External v		20 (max. 0.30)	0.	20 (max. 0.70)		Pass		
Party wal		00 (max. 0.20)	-	44 (0.70)		Pass		
		11 (max. 0.25)		11 (max. 0.70)		Pass Pass		
Openings	22 (max. 2.00)	nax. 2.00) 1.36 (max. 3.30)						
2a Thermal bridg		uh a kara-la						
	ging calculated from linear	tnermai transmit	tances for each jur	nction				
3 Air permeabili					³/(h.m²) @ 50 Pa			
Air permeabi					Date			
Maximum	Efficiencies	10.0		m	³/(h.m²) @ 50 Pa	Pass		
Limiting System								
4 Heating efficie	ncy							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB) Combi boiler	
	Efficiency: 89.3% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system		1
Specific fan power	0.16	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sur	nmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Medium	Pass
Based on:		_
Overshading	Average	
Windows facing South West	12.77 m², No overhang	
Windows facing North West	5.45 m², No overhang]
Air change rate	2.00 ach]
Blinds/curtains	Dark-coloured curtain or roller blind, closed 100% of daylight hours	
Criterion 4 – Building performance consistent with I		
Party Walls	DER UNA DI LE TURC	
Type	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	4.00 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Floor U-value	0.11 W/m²K	
Photovoltaic array	579.70 kWh/Year	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r10

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 84	B 90	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r10