#### PREDICTED ENERGY ASSESSMENT




Plot 070, 2 Bed, Dwelling type: Flat, Semi-Detached

K, B Date of assessment: 05/11/2020
Produced by: Silvio Junges
Total floor area: 61.07 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

#### **Energy Efficiency Rating**

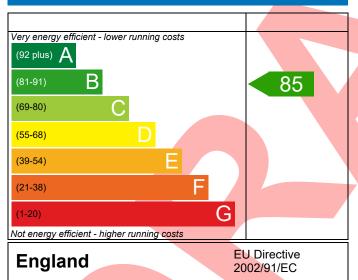

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### **Environmental Impact (CO<sub>2</sub>) Rating**

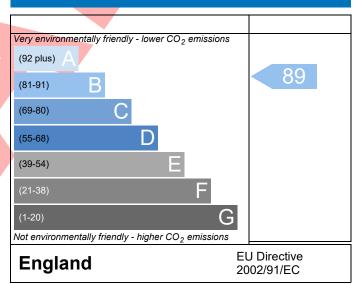

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



roperty Reference	4907-0015-4444-07	70					Issued on Date	0	5/11/2020	
ssessment	070		Prop Type Ref 1F Flat - Semi Stepped				, ,			
eference										
roperty	Plot 070, 2 Bed, K,	В								
AP Rating			85 B	DER		16.30	TER		16.83	
nvironmental			89 B	% DER <ter< td=""><td>₹</td><td></td><td>3.14</td><td></td><td></td></ter<>	₹		3.14			
O₂ Emissions (t/year	r)		0.79	DFEE		33.52	TFEE		34.09	
ieneral Requirement	ts Compliance		Pass	% DFEE <tf< td=""><td>EE</td><td></td><td>1.67</td><td></td><td></td></tf<>	EE		1.67			
	Mr. Silvio Junges, Silvio	_	l: 01884	242050,			Assessor ID	F	637-0001	
	ilvio.junges@aessouth	nern.co.uk								
lient	Baker Estates									
JMARY FOR INPUT D	OATA FOR New Build (	As Designe	d)							
iterion 1 – Achieving	g the TER and TFEE rat	te								
TER and DER						•				
Fuel for main heati	ng		Mains ga	as					]	
Fuel factor			1.00 (ma	nins gas)					]	
Target Carbon Dioxide Emission Rate (TER)			16.83			kgCO <sub>2</sub> /m <sup>2</sup>	2			
Dwelling Carbon Dioxide Emission Rate (DER)			16.30				kgCO₂/m²	2	Pass	
			-0.53 (-3	.1%)			kgCO₂/m²	2		
TFEE and DFEE										
Target Fabric Energy Efficiency (TFEE)			34.09				kWh/m²/	-		
Dwelling Fabric Ene	ergy Efficiency (DFEE)		33.52				kWh/m²/	-		
			-0.6 (-1.8	3%)			kWh/m²/	yr	Pass	
riterion 2 – Limits on										
Limiting Fabric Sta	ndards								į	
2 Fabric U-values										
Element		Average			High	nest				
External wa	II /	0.25 (max			0.25	(max. 0.7	0)		Pass	
Party wall		0.00 (max			-				Pass	
Openings		1.22 (max. 2.00)			1.40 (max. 3.30)				Pass	
2a Thermal bridgin	-									
	ng calculated from line	ar thermal	transmit	tances for eac	ch junct	ion				
3 Air permeability										
Air permeability	y at 50 pascals				sign value)			m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa		
Maximum			10.0				m³/(h.m²) @ 50	Pa	Pass	
	ficiencies									
Limiting System Eff	liciencies								<u> </u>	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 30	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sur	nmer	
9 Summertime temperature		
Overheating risk (South West England)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing East	3.00 m², No overhang	
Windows facing West	1.50 m <sup>2</sup> , No overhang	
Air change rate	6.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with I	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m <sup>2</sup> K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m <sup>2</sup> K	
Door U-value	0.81 W/m²K	
	<del></del>	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

### **RECOMMENDATIONS**



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 85	B 89	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16