
#### PREDICTED ENERGY ASSESSMENT



Plot 1228, 3 Bed, K, WC, B Dwelling type: Date of assessment: Produced by: Total floor area: House, Mid-Terrace 09/03/2021 Silvio Junges 94.88 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

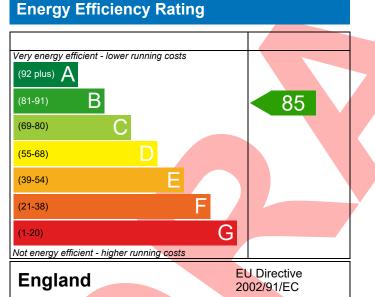

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

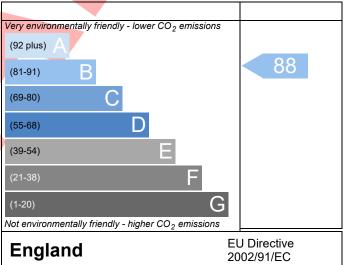

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Page 1 of 4

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property Reference	4907-0015-4680-1228 Issued on Date 09/0					09/03/2021		
Assessment	Plot 1228	Prop Type Ref A30L Mid (As)						
Reference								
Property	Plot 1228, 3 Bed, K, W	С, В						
SAP Rating		85 B	85 B DER		TER	16.22		
Environmental		88 B	% DER <ter< th=""><th></th><th>7.07</th><th></th></ter<>		7.07			
CO <sub>2</sub> Emissions (t/year)		1.16	DFEE	36.56	TFEE	43.36		
General Requirements Compliance		Pass	% DFEE <tfee< th=""><th></th><th>15.67</th><th></th></tfee<>		15.67			
Assessor Details Ms. Eloise Utley, Eloise Utley, Tel: 01884 242050, eloise.utley@aessc.co.uk Assessor ID						P637-0001		
Client								
SUMARY FOR INPUT D	ATA FOR New Build (As	Designed)						
Criterion 1 – Achieving	the TER and TFEE rate							
<u>1a TER and DER</u>								
Fuel for main heatir	Mains	gas						
Fuel factor		1.00 (mains gas)						
Target Carbon Dioxi	16.22		kgCO <sub>2</sub> /m <sup>2</sup>					
Dwelling Carbon Die	R) 15.07		kgCO <sub>2</sub> /m <sup>2</sup>	Pass				
		-1.15 (-	7.1%)		kgCO <sub>2</sub> /m <sup>2</sup>			
<u>1b TFEE and DFEE</u>								
Target Fabric Energy	43.36		kWh/m²/yr					
Dwelling Fabric Ene	36.56		kWh/m²/yr					
		-6.8 (-1	5.7%)		kWh/m²/yr	Pass		
Criterion 2 – Limits on								
Limiting Fabric Stan	ndards							
2 Fabric U-values								
Element		verage		ighest				
External wall		25 (max. 0.30)	0.	25 (max. 0.70	))	Pass		
Party wall					Pass			
Floor		15 (max. 0.25)				Pass		
Roof		. ,	(max. 0.20) 0.11 (max. 0.35)			Pass		
Openings		31 (max. 2.00)	1.	40 (max. 3.30	))	Pass		
2a Thermal bridging	g calculated from linear	the repeal transma	ttancas far aash iw	action				
	g calculated from linear	thermal transmi	ittances for each jur	ICLION				
<u>3 Air permeability</u>	at 50 pages la	F 01 /d		]	m <sup>3</sup> //h m <sup>2</sup> ) @ 50 De			
Air permeability at 50 pascals			esign value)	]	] m³/(h.m²) @ 50 Pa ] m³/(h.m²) @ 50 Pa <b>Pass</b>			
Maximum Limiting System Eff	icioncios —	10.0			m²/(n.m²) @ 50 Pa	Pass		
<u>4 Heating efficiency</u>								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs		Pass	
Hot water controls	No cylinder			
Boiler interlock	Yes		Pass	
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100	%		
Minimum	75	%	Pass	
8 Mechanical ventilation				
Not applicable				
iterion 3 – Limiting the effects of heat gains in su	nmer			
Summertime temperature				
Overheating risk (Southern England)	Slight		Pass	
sed on:				
Overshading	Average		]	
Windows facing East	7.01 m <sup>2</sup> , No overhang			
Windows facing West	3.38 m <sup>2</sup> , No overhang			
Air change rate	4.00 ach			
Blinds/curtains	None			
iterion 4 – Building performance consistent with	DER and DFEE rate			
Party Walls				
Type	U-value	24		
Filled Cavity with Edge Sealing	0.00	W/m²K	Pass	
Filled Cavity with Edge Sealing Air permeability and pressure testing		W/m²K	Pass	
Filled Cavity with Edge Sealing Air permeability and pressure testing <u>3 Air permeability</u>	0.00		Pass	
Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	0.00 5.01 (design value) r	m³/(h.m²) @ 50 Pa		
Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	0.00 5.01 (design value) r			
Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features	0.00 5.01 (design value) r 10.0 r	n³/(h.m²) @ 50 Pa n³/(h.m²) @ 50 Pa		
Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features Party wall U-value	0.00 5.01 (design value) r 10.0 r	m³/(h.m²) @ 50 Pa m³/(h.m²) @ 50 Pa		
Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features Party wall U-value Roof U-value	0.00 5.01 (design value) r 10.0 r 0.00 0.11	m³/(h.m²) @ 50 Pa m³/(h.m²) @ 50 Pa W/m²K W/m²K		
Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum Key features Party wall U-value	0.00 5.01 (design value) r 10.0 r	m³/(h.m²) @ 50 Pa m³/(h.m²) @ 50 Pa	Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



### RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£31	B 87	B 90	Recommended
Photovoltaic	£5,000 - £8,000	£335	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£9,000 - £14,000	£366	A 96	A 98	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

