PREDICTED ENERGY ASSESSMENT




Plot 133, Melton Mowbray, LE13 Dwelling type: House, Mid-Terrace

Date of assessment: 24/06/2022 Produced by: Hazel Black Total floor area: 73.32 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

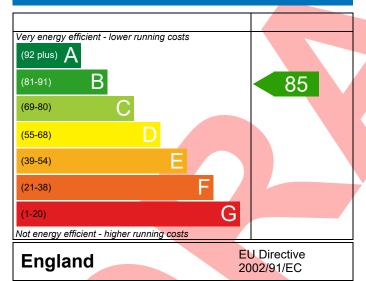

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

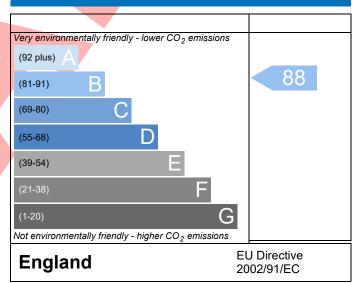

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when s completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference Plot 133 Type 69 MT				Issued on Date	24/06/2022			
Assessment 1								
Reference	h 1542							
Property Plot 133, Melton Mow								
SAP Rating	85 B	DER	16.12	TER	17.53			
Environmental	88 B	% DER <ter< td=""><td></td><td>8.03</td><td></td></ter<>		8.03				
CO ₂ Emissions (t/year)	1.06	DFEE ATTES	38.77	TFEE	44.29			
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>12.48</td><td></td></tfee<>		12.48				
Assessor Details Ms. Hazel Black, Hazel Black	ck, Tel: 01582 54	4250, hazelb@ee-l	ltd.co.uk	Assessor ID	M003-0001			
Client								
SUMARY FOR INPUT DATA FOR New Build (As I	Designed)							
Criterion 1 – Achieving the TER and TFEE rate								
1a TER and DER								
Fuel for main heating	Mains ga	as						
Fuel factor	1.00 (ma	nins gas)						
Target Carbon Dioxide Emission Rate (TER)	17.53		kgCO ₂ /m ²					
Dwelling Carbon Dioxide Emission Rate (DER			kgCO ₂ /m ²	Pass				
41 7555 10555	-1.41 (-8	.0%)		kgCO ₂ /m ²				
1b TFEE and DFEE	44.30			1.3.4.15 / 2 /				
Target Fabric Energy Efficiency (TFEE) Dwelling Fabric Energy Efficiency (DFEE)	44.29 38.77			kWh/m²/yr kWh/m²/yr				
Dwelling Fabric Energy Efficiency (DFEE)	-5.5 (-12	(1%)	•	kWh/m²/yr	Pass			
Criterion 2 – Limits on design flexibility	3.3 (12	.470)		KVVII/III / yI	1 033			
Limiting Fabric Standards								
2 Fabric U-values								
	erage	Hi	ghest					
	24 (max. 0.30)		24 (max. 0.70	0)	Pass			
	00 (max. 0.20)	-	,	,	Pass			
Floor 0.1	L3 (max. 0.25)	0.:	13 (max. 0.70	0)	Pass			
Roof 0.1	L1 (max. 0.20)				Pass			
Openings 1.3	35 (max. 2.00)	(max. 2.00) 1.41 (max. 3.30)						
2a Thermal bridging								
Thermal bridging calculated from linear t	hermal transmitt	ances for each jun	nction					
3 Air permeability	7							
Air permeability at 50 pascals	5.01 (de	5.01 (design value) m ³ /(h.m ²) @ 50 Pa						
Maximum	10.0			m ³ /(h.m ²) @ 50 P	a Pass			
Limiting System Efficiencies								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas					
	Data from database					
	Ideal LOGIC COMBI ESP1 35 Combi boiler					
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%					
Secondary heating system						
	None					
5 Cylinder insulation						
Hot water storage	No cylinder					
<u>6 Controls</u>						
Space heating controls	Time and temperature zone control					
Hot water controls	No cylinder					
Boiler interlock	Yes					
7 Low energy lights						
Percentage of fixed lights with low-energy	100 %					
fittings						
Minimum	75 %	Pass				
8 Mechanical ventilation						
Not applicable						
Criterion 3 – Limiting the effects of heat gains in sum	mer					
9 Summertime temperature						
Overheating risk (Midlands)	Not significant	Pass				
Based on:						
Overshading	Average					
Windows facing North	7.24 m², No overhang					
Windows facing South	3.30 m², No overhang					
Air change rate	4.00 ach					
Blinds/curtains	Dark-coloured curtain or roller blind, closed 100% of daylight					
	hours					
Criterion 4 – Building performance consistent with D	ER and DFEE rate					
Party Walls						
Туре	U-value					
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass				
Air permeability and pressure testing						
3 Air permeability						
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa					
Maximum	10.0 m³/(h.m²) @ 50 Pa					
10 Key features						
Party wall U-value	0.00 W/m²K					
Roof U-value	0.11 W/m²K					
Door U-value						
DOOL O-value	1.00 W/m²K					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£24	B 86	B 90	Recommended
Photovoltaic	£3,500 - £5,500	£344	A 97	A 100	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£368	A 97	A 100	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

