PREDICTED ENERGY ASSESSMENT



Plot 24, Marroway Lane, Witchford, Cambridgeshire, CB6 2HU Dwelling type: House, Semi-Detached


Date of assessment: 11/01/2023 Produced by: Jacob Marchant

Total floor area: 87.24 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

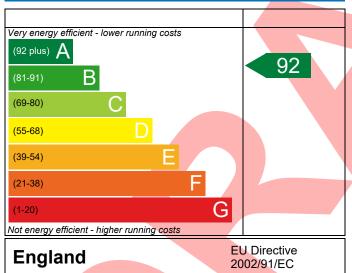

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

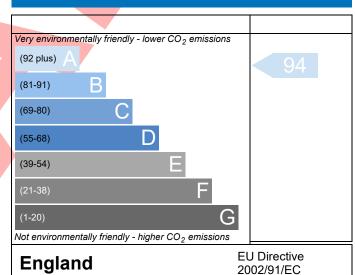

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



CDC 21111 DIs				Januard and Data	44/04/2022			
Property Reference CB6 2HU Plo	OT 2	D.	on Tuno Bof	Issued on Date	11/01/2023			
Assessment 001 Reference	001 Prop Type Ref Type C							
Property Plot 24, Marroway Lane, Witchford, Cambridgeshire, CB6 2HU								
SAP Rating	92 A	DER	8.58	TER	17.75			
Environmental	94 A	% DER <ter< td=""><td></td><td>51.66</td><td></td></ter<>		51.66				
CO₂ Emissions (t/year)	0.49	DFEE	44.93	TFEE	50.17			
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>10.43</td><td></td></tfee<>		10.43				
Assessor Details Mr. Jake Eaton,	Jake Eaton, Tel: 014002	283471, jake@aerated	ch.co.uk	Assessor ID	T253-0001			
Client								
SUMARY FOR INPUT DATA FOR New	Build (As Designed)							
Criterion 1 – Achieving the TER and T	FEE rate							
1a TER and DER								
Fuel for main heating	Mair	ns gas						
Fuel factor	1.00	(mains gas)						
Target Carbon Dioxide Emission R	ate (TER) 17.7	5		kgCO ₂ /m ²				
Dwelling Carbon Dioxide Emission	Rate (DER) 8.58			kgCO ₂ /m ²	Pass			
	-9.17	7 (-51.7%)		kgCO₂/m²				
1b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)		7		kWh/m²/yr				
Dwelling Fabric Energy Efficiency (7	kWh/m²/yr				
Cuitanian 2 Limita an darian flavibil		(-10.6%)		kWh/m²/yr	Pass			
Criterion 2 – Limits on design flexibil Limiting Fabric Standards	ity							
2 Fabric U-values	A		i ala a at					
Element External wall	Average 0.23 (max. 0.30		ighest .23 (max. 0.70	٦)	Pass			
Party wall	0.23 (max. 0.30 0.00 (max. 0.20		,	5)	Pass			
Floor	0.12 (max. 0.25		.12 (max. 0.70	0)	Pass			
Roof	0.13 (max. 0.20			,	Pass			
Openings	1.37 (max. 2.00	•	.40 (max. 3.30	,	Pass			
2a Thermal bridging								
Thermal bridging calculated from	om linear thermal trans	mittances for each ju	nction					
3 Air permeability		-						
Air permeability at 50 pascals	5.01	(design value)		m³/(h.m²) @ 50 Pa				
Maximum	10.0			m ³ /(h.m ²) @ 50 Pa	Pass			
Limiting System Efficiencies								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 24	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None	<u> </u>
	None	
<u>5 Cylinder insulation</u>		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		_
Specific fan power	0.1100 0.1400	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sum	nmer	
9 Summertime temperature		
Overheating risk (East Anglia)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing East	7.48 m ² , No overhang	
Windows facing South	0.71 m ² , No overhang	
Windows facing West	3.60 m ² , No overhang	
Air change rate	8.00 ach	
Blinds/curtains	Light-coloured curtain or roller blind, closed 0% of daylight	
	hours	
Criterion 4 – Building performance consistent with D	PER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m³/(h.m²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



10 Key features

Party wall U-value Floor U-value Photovoltaic array

0.00	W/m²K
0.12	W/m²K
2.05	kW



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

