PREDICTED ENERGY ASSESSMENT



Plot 492, Dunstall Farm , B78 Dwelling type: House, Mid-Terrace


Date of assessment: 18/06/2021 Produced by: William Vincent

Total floor area: 57.06 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

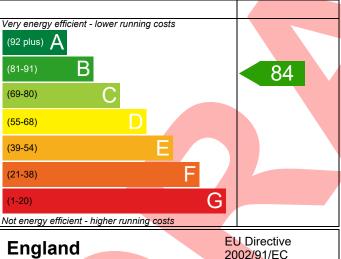

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

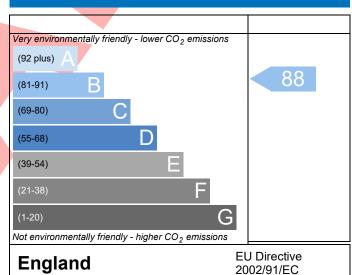

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference Plot 492 Ty	pe 67 MT				Issued on Date	18/06/2021
Assessment 1			Pi	rop Type Ref		
Reference						
Property Plot 492, D	unstall Farm , B78					
SAP Rating		84 B	DER	17.49	TER	18.29
Environmental		88 B	% DER <ter< td=""><td></td><td>4.37</td><td></td></ter<>		4.37	
CO₂ Emissions (t/year)		0.88	DFEE	40.33	TFEE	43.39
General Requirements Compliance	!	Pass	% DFEE <tfee< td=""><td></td><td>7.07</td><td></td></tfee<>		7.07	
	ncent, William Vinc at@ee-ltd.co.uk	ent, Tel: 0)1582544250,		Assessor ID	T759-0001
Client						
SUMARY FOR INPUT DATA FOR Nev	v Build (As Designe	-d)				
Criterion 1 – Achieving the TER and		,				
1a TER and DER						
Fuel for main heating		Mains ga	IS	7		
Fuel factor		1.00 (ma				
Target Carbon Dioxide Emission	Rate (TER)	18.29			kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emissio		17.49			kgCO ₂ /m ²	Pass
<u> </u>		-0.80 (-4	.4%)		kgCO ₂ /m ²	
1b TFEE and DFEE						
Target Fabric Energy Efficiency (1	FEE)	43.39			kWh/m²/yr	
Dwelling Fabric Energy Efficiency	(DFEE)	40.33	7		kWh/m²/yr	
		-3.1 (-7.1	.%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexib	ility		,			
Limiting Fabric Standards						
2 Fabric U-values						
Element	Average		F	lighest		
External wall	0.28 (max	k. 0.30)	0	.28 (max. 0.7	0)	Pass
Party wall	0.00 (max	k. 0.20)	-			Pass
Floor	0.13 (max	k. 0.25)	0	.13 (max. 0.70	0)	Pass
Roof	0.11 (max	k. 0.20)	0	.11 (max. 0.3	5)	Pass
Openings	1.36 (max	k. 2.00)	1	.41 (max. 3.3	0)	Pass
2a Thermal bridging						
Thermal bridging calculated f	rom linear therma	l transmitt	ances for each ju	nction		
3 Air permeability						
		5 01 (de	sign value)		m³/(h.m²) @ 50 P	а
Air permeability at 50 pascals		13.01 (ac.				
		10.0	7.6 (0.00)		m ³ /(h.m ²) @ 50 P	
Air permeability at 50 pascals						

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	<u> </u>
5 Cylinder insulation	Holic	
Hot water storage	No cylinder	
	No cylinder	_
6 Controls		¬ — —
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Midlands)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North East	3.30 m², No overhang	7
Windows facing South West	6.14 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	Dark-coloured curtain or roller blind, closed 100% of daylight	7
	hours	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Door U-value	1.10 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£25	B 85	B 90	Recommended
Photovoltaic	£3,500 - £5,500	£328	A 98	A 102	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£353	A 98	A 102	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

