PREDICTED ENERGY ASSESSMENT



Plot 168, 2 Bed,

K, WC, B


Dwelling type: House, Mid-Terrace

Date of assessment: 19/02/2024
Produced by: Henry Knight
Total floor area: 70.84 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

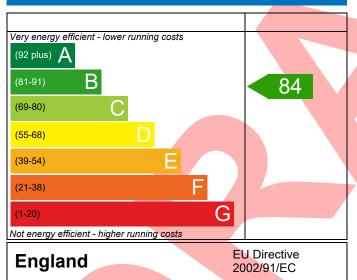

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

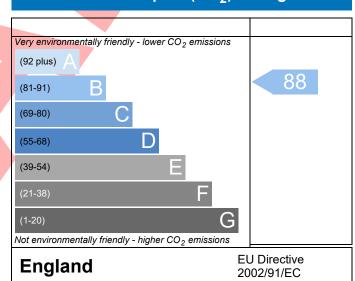

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-U528-444	4-168		Issued on	19/02/2024	
Assessment 168		Pro	op Type Ref 2B HT B Mi	d (As)	
Reference					
Property Plot 168, 2 Bed	, K, WC, B				
SAP Rating	84 B	DER	16.59 TER	17.85	
Environmental	88 B	% DER <ter< td=""><td>7</td><td>7.06</td></ter<>	7	7.06	
CO₂ Emissions (t/year)	0.97	DFEE	38.80 TFEE	45.27	
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td>14</td><td>4.29</td></tfee<>	14	4.29	
Assessor Details Mr. Henry Knight, H	Henry Knight, Tel: 01173	183565,	Assess	sor ID U528-0001	
Henry.knight@aess	sc.co.uk				
Client					
SUMARY FOR INPUT DATA FOR New Bu	ild (As Designed)				
Criterion 1 – Achieving the TER and TFE	E rate				
1a TER and DER					
Fuel for main heating	Mains g	as			
Fuel factor	1.00 (m	ains gas)			
Target Carbon Dioxide Emission Rate	(TER) 17.85	17.85 kgCO ₂ /m ²			
Dwelling Carbon Dioxide Emission Ra	te (DER) 16.59	16.59 kgCO ₂ /m ²			
	-1.26 (-7	7.1%)	kgC	CO ₂ /m ²	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)		45.27 kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DF		20/)		/h/m²/yr	
Cuitorian 2 Limits on decion floribility	-6.5 (-14	.3%)	KVV	/h/m²/yr Pass	
Criterion 2 – Limits on design flexibility		_			
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average		ghest		
External wall	0.25 (max. 0.30)	0.	25 (max. 0.70)	Pass	
Party wall Floor	0.00 (max. 0.20) 0.16 (max. 0.25)	0	16 (max. 0.70)	Pass Pass	
Roof	0.16 (max. 0.25)		,	Pass	
Openings	1.38 (max. 2.00)				
2a Thermal bridging	2.50 (Max. 2.60)	1.	10 (Max. 5.50)	Pass	
Thermal bridging calculated from	linear thermal transmit	tances for each jur	nction		
3 Air permeability	micar enermar transmit	tances for each jul			
Air permeability at 50 pascals	5 01 (4e	sign value)	m ³ //h m ²) @ 50 Pa	
Maximum	10.0	31511 value)) @ 50 Pa Pass	
Limiting System Efficiencies	10.0			7 6 30 1 4 1 433	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass				
	Data from database					
	Worcester Greenstar 32CDi Compact ErP					
	Combi boiler					
	Efficiency: 89.8% SEDBUK2009 Minimum: 88.0%					
Sacandary heating system	None					
Secondary heating system	Notie					
5 Cylinder insulation						
Hot water storage	No cylinder					
<u>6 Controls</u>						
Space heating controls	Time and temperature zone control	Pass				
Hot water controls	No cylinder					
Boiler interlock	Yes	Pass				
7 Low energy lights						
Percentage of fixed lights with low-energy	100 %					
fittings						
Minimum	75 %	Pass				
8 Mechanical ventilation						
Not applicable						
Criterion 3 – Limiting the effects of heat gains in sui	mmer					
9 Summertime temperature						
Overheating risk (South West England)	Not significant	Pass				
Based on:						
Overshading	Average					
Windows facing East	4.04 m², No overhang					
Windows facing West	5.26 m², No overhang					
Air change rate	3.00 ach					
Blinds/curtains	None					
Criterion 4 – Building performance consistent with	DER and DFEE rate					
Party Walls						
Туре	U-value					
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass				
Air permeability and pressure testing						
3 Air permeability						
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	A				
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass				
10 Key features						
Party wall U-value	0.00 W/m²K					
Roof U-value	0.11 W/m²K					
	V///// N					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£59	B 86	B 90	Recommended
Photovoltaic	£3,500 - £5,500	£607	A 97	A 100	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£666	A 97	A 100	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19