#### PREDICTED ENERGY ASSESSMENT



Plot 174, 4 Bed, K. WC. B Dwelling type: House, Semi-Detached


Date of assessment: 19/02/2024 Produced by: Henry Knight

Total floor area: 98 m<sup>2</sup>

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

#### **Energy Efficiency Rating**

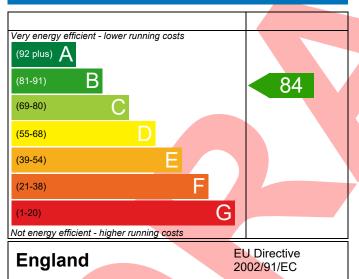

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### **Environmental Impact (CO<sub>2</sub>) Rating**

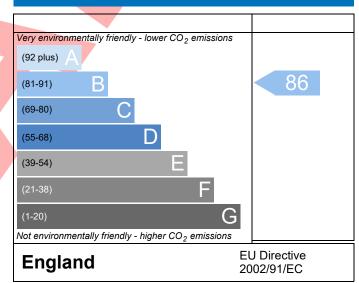

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



| Property Reference                          | 4907-U528-444                      | 4-174            |                     |   |            |          | Issued on Date                              | 19/02/2024 |  |
|---|------------------------------------|------------------|---------------------|---|------------|----------|---|------------|--|
| Assessment<br>Reference                     | 174 Prop Type Ref 4B HTR Semi (Op) |                  |                     |   |            |          |   |            |  |
| Property                                    | Plot 174, 4 Bed,                   | K, WC, B         |                     |   |            |          |   |            |  |
| SAP Rating                                  |                                    |                  | 84 B                | DER   |            | 16.81    | TER   | 17.54      |  |
| Environmental Environmental                 |                                    |                  | 86 B                | % DER <ter< td=""><td></td><td colspan="2">4.16</td><td></td></ter<>  |            | 4.16     |   |            |  |
| CO₂ Emissions (t/year)                      |                                    |                  | 1.36                | DFEE  |            | 45.43    | TFEE  | 50.88      |  |
| General Requireme                           | -                                  |                  | Pass                | % DFEE <tf< td=""><td>EE .</td><td></td><td>10.71</td><td></td></tf<> | EE .       |          | 10.71                                       |            |  |
| Assessor Details                            | Mr. Henry Knight, H                | enry Knight      | ., Tel: 01173       | 183565,   |            |          | Assessor ID                                 | U528-0001  |  |
|   | Henry.knight@aess                  | c.co.uk          |                     |   |            |          |   |            |  |
| Client                                      |                                    |                  |                     |   |            |          |   |            |  |
| SUMARY FOR INPUT                            | DATA FOR New Bui                   | ld (As Desig     | ned)                |   |            |          |   |            |  |
| Criterion 1 – Achievii                      | ng the TER and TFEE                | rate             |                     |   |            |          |   |            |  |
| La TER and DER                              |                                    |                  |                     |   |            |          |   |            |  |
| Fuel for main hea                           | ting                               |                  | Mains ga            | as  |            |          |   |            |  |
| Fuel factor                                 |                                    |                  | 1.00 (ma            | ins gas)  | 7          |          |   |            |  |
| Target Carbon Dioxide Emission Rate (TER)   |                                    |                  | 17.54               |   |            |          | kgCO <sub>2</sub> /m <sup>2</sup>           |            |  |
| Dwelling Carbon Dioxide Emission Rate (DER) |                                    | e (DER)          | 16.81               |   |            |          | kgCO <sub>2</sub> /m <sup>2</sup>           | Pass       |  |
|   |                                    |                  | -0.73 (-4           | .2%)  |            | <b>)</b> | kgCO₂/m²                                    |            |  |
| <u>b TFEE and DFEE</u>                      |                                    |                  |                     |   |            |          |   |            |  |
| Target Fabric Energy Efficiency (TFEE)      |                                    |                  | 50.88               |   |            |          | kWh/m²/yr                                   |            |  |
| Dwelling Fabric Energy Efficiency (DFEE)    |                                    | EE)              | 45.43               |   |            |          | kWh/m²/yr                                   |            |  |
|   |                                    |                  | -5.5 (-10           | .8%)  |            |          | kWh/m²/yr                                   | Pass       |  |
| Criterion 2 – Limits o                      | n design flexibility               |                  |                     | _   |            |          |   |            |  |
| Limiting Fabric St                          | andards                            |                  |                     |   |            |          |   |            |  |
| 2 Fabric U-values                           |                                    |                  |                     |   |            |          |   |            |  |
| Element                                     |                                    | Averag           | e                   | Highes  | :          |          |   |            |  |
| External w                                  | all                                | ·                | nax. 0.30)          |   | 0.25 (m    | ax. 0.70 | )   | Pass       |  |
| Party wall                                  |                                    |                  | nax. 0.20)          |   | -          |          |   | Pass       |  |
| Floor                                       |                                    | ·                | nax. 0.25)          | 0.19 (max. 0.7  |            |          | •   | Pass       |  |
| Roof  |                                    | 0.11 (max. 0.20) |                     |   | 0.11 (m    | Pass     |   |            |  |
| Openings                                    |                                    | 1.38 (max.       |                     |   | 1.40 (m    | ax. 3.30 | )   | Pass       |  |
| 2a Thermal bridgi                           |                                    |                  |                     | _   |            |          |   |            |  |
|   | ing calculated from                | linear thern     | nal transmit        | ances for eac   | h junctior |          |   |            |  |
| 3 Air permeability                          |                                    |                  |                     |   |            |          |   |            |  |
| Air permeability at 50 pascals              |                                    |                  | 5.01 (design value) |   |            |          | m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa |            |  |
| Maximum                                     |                                    |                  | 10.0                |   |            |          | m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa | Pass       |  |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



| Main heating system                                    | Boiler system with radiators or underfloor - Mains gas         | Pass   |
|--|--|--------|
|  | Data from database   |        |
|  | Worcester Greenstar 32CDi Compact ErP                          |        |
|  | Combi boiler   |        |
|  | Efficiency: 89.8% SEDBUK2009                                   |        |
|  | Minimum: 88.0%   |        |
| Secondary heating system                               | None   |        |
| 5 Cylinder insulation                                  |  |        |
| Hot water storage                                      | No cylinder  |        |
| <u>6 Controls</u>                                      |  |        |
| Space heating controls                                 | Time and temperature zone control                              | Pass   |
| Hot water controls                                     | No cylinder  |        |
| Boiler interlock                                       | Yes  | Pass   |
| 7 Low energy lights                                    |  |        |
| Percentage of fixed lights with low-energy             | 100 %  |        |
| fittings   |  |        |
| Minimum  | 75 %   | Pass   |
| 8 Mechanical ventilation                               |  |        |
| Not applicable   |  |        |
| Criterion 3 – Limiting the effects of heat gains in su | mmer   |        |
| 9 Summertime temperature                               |  |        |
| Overheating risk (South West England)                  | Not significant  | Pass   |
| Based on:  |  |        |
| Overshading  | Average  |        |
| Windows facing North                                   | 6.56 m², No overhang   |        |
| Windows facing East                                    | 0.60 m <sup>2</sup> , No overhang                              |        |
| Windows facing South                                   | 3.22 m <sup>2</sup> , No overhang                              |        |
| Air change rate  | 3.00 ach   |        |
| Blinds/curtains  | None   |        |
| Criterion 4 – Building performance consistent with     | DER and DFEE rate  |        |
| Party Walls  |  |        |
| Туре   | U-value  |        |
| Filled Cavity with Edge Sealing                        | 0.00 W/m <sup>2</sup> K  | Pass   |
| Air permeability and pressure testing                  |  |        |
| 3 Air permeability                                     |  |        |
| Air permeability at 50 pascals                         | 5.01 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 P | a      |
| Maximum  | 10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 P                | a Pass |
| 10 Key features  |  |        |
| Party wall U-value                                     | 0.00 W/m²K   |        |
| Roof U-value   | 0.11 W/m²K   |        |
| Thermal bridging y-value                               | 0.036 W/m²K  |        |
| 3 37   |  |        |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

### **RECOMMENDATIONS**



|                     | Typical cost     | Typical savings<br>per year | Energy<br>efficiency | Environmental<br>impact | Result            |
|---------------------|------------------|-----------------------------|----------------------|-------------------------|-------------------|
| Low energy lights   |                  |                             | 0                    | 0                       | Already installed |
| Solar water heating | £4,000 - £6,000  | £63                         | B 85                 | B 88                    | Recommended       |
| Photovoltaic        | £3,500 - £5,500  | £607                        | A 95                 | A 96                    | Recommended       |
| Wind turbine        |                  |                             | 0                    | 0                       | Not applicable    |
| Totals              | £7,500 - £11,500 | £670                        | A 95                 | A 96                    |                   |



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19