PREDICTED ENERGY ASSESSMENT




Plot 470, 2 bed, Dwelling type: House, Semi-Detached K. WC. B Date of assessment: 10/08/2021

Date of assessment: 10/08/2021
Produced by: Silvio Junges
Total floor area: 74.38 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

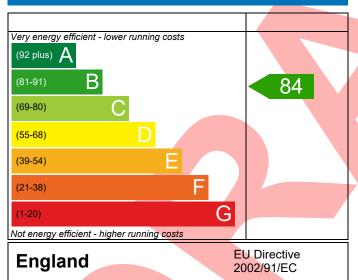

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

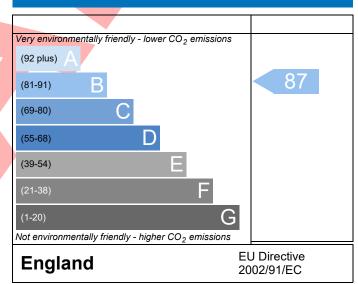

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-P637-5339-	470			Issued on Date	10/08/2021			
Assessment	470 Prop Type Ref AF2 MOB-SEMI-OPP								
Reference									
Property	Plot 470, 2 bed, K	, WC, B							
SAP Rating		84 B	DER	17.38	TER	19.00			
Environmental		87 B	% DER <ter< td=""><td></td><td>8.54</td><td>_</td></ter<>		8.54	_			
CO₂ Emissions (t/year)		1.07	DFEE	44.60	TFEE	51.83			
General Requirement	ts Compliance	Pass	% DFEE <tfee< th=""><th></th><th>13.96</th><th></th></tfee<>		13.96				
	Ar. Silvio Junges, Silv	•	242050,	_	Assessor ID	P637-0001			
	silvio.junges@aessouthern.co.uk								
Client	Northern Home Counties, Bellway Homes								
SUMARY FOR INPUT D	OATA FOR New Build	(As Designed)							
Criterion 1 – Achievin	g the TER and TFEE r	ate							
la TER and DER									
Fuel for main heati	ng	Mains	gas						
Fuel factor		1.00 (m	nains gas)						
Target Carbon Diox	ER) 19.00	19.00 kgCO ₂ /m ²							
Dwelling Carbon Di	(DER) 17.38			kgCO ₂ /m ²	Pass				
		-1.62 (-	8.5%)		kgCO ₂ /m ²				
b TFEE and DFEE									
Target Fabric Energ		51.83 kWh/m²/yr							
Dwelling Fabric End				kWh/m²/yr					
		-7.2 (-1	3.9%)		kWh/m²/yr	Pass			
Criterion 2 – Limits on									
Limiting Fabric Sta	ndards								
2 Fabric U-values									
Element		Average	H	lighest					
External wa	II /	0.25 (max. 0.30)).25 (max. 0.70)	Pass				
Party wall		0.00 (max. 0.20)		-		Pass			
Floor		0.12 (max. 0.25)).12 (max. 0.70)		Pass			
Roof		0.11 (max. 0.20)).11 (max. 0.35)	Pass Pass				
Openings		1.38 (max. 2.00)	38 (max. 2.00) 1.40 (max. 3.30)						
2a Thermal bridging									
	ng calculated from lir	near thermal transmi	ttances for each ju	ınction					
3 Air permeability									
Air permeability		esign value)		m³/(h.m²) @ 50 Pa					
Maximum		10.0		m ³ /(h.m ²) @ 50 Pa	Pass				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 30	
	Combi boiler Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	1 433
Boiler interlock	Yes	Page
	res	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing East	4.83 m², No overhang	
Windows facing South	0.72 m², No overhang	
Windows facing West	2.81 m², No overhang	=
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	3
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Floor U-value	0.12 W/m²K	
Thermal bridging y-value	0.034 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 85	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£345	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£372	A 96	A 99	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

