PREDICTED ENERGY ASSESSMENT



Plot 011, 2 Bed, Dwelling type:

K. WC. B


House, Mid-Terrace

Date of assessment: 20/10/2022 Produced by: Silvio Junges Total floor area: 80.04 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

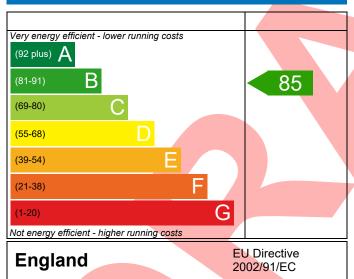

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

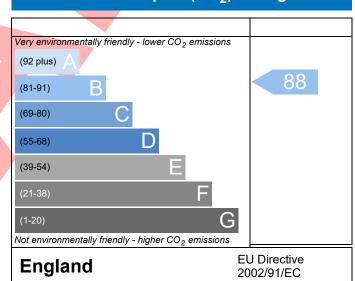

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-0023-5953	3-011				Issued on Date	20/10/2022	
Assessment	Plot 011	Plot 011 Prop Type Ref Cooper - Mid Stag (Op)						
Reference	Plot 011, 2 Bed,	V MC P						
Property	Plot 011, 2 Bed,	N, VVC, D						
SAP Rating			85 B DER		15.44	TER	17.19	
Environmental			88 B	% DER <ter< td=""><td></td><td colspan="2">10.18</td></ter<>		10.18		
CO ₂ Emissions (t/year)			1.00	DFEE	38.06	TFEE	45.52	
General Requireme	nts Compliance		Pass	% DFEE <tfe< td=""><td></td><td>16.39</td><td></td></tfe<>		16.39		
Assessor Details	Mr. Silvio Junges, Si	lvio Junges, T	242050,		Assessor ID	P637-0001		
	silvio.junges@aesso	c.co.uk						
Client								
SUMARY FOR INPUT	DATA FOR New Bui	ld (As Design	ied)					
Criterion 1 – Achievi	ng the TER and TFEE	rate						
1a TER and DER								
Fuel for main hea	ting		Mains ga	ns .				
Fuel factor			1.00 (ma	ins gas)				
Target Carbon Dioxide Emission Rate (TER)			17.19		kgCO ₂ /m ²			
Dwelling Carbon Dioxide Emission Rate (DER)			15.44	Pass				
			-1.75 (-1	0.2%)		kgCO ₂ /m ²		
1b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)			45.52		kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DFEE)			38.06	7		kWh/m²/yr		
			-7.4 (-16	.3%)		kWh/m²/yr	Pass	
Criterion 2 – Limits o	n design flexibility							
Limiting Fabric St	andards							
2 Fabric U-values								
Element		Average			Highest			
External w	all	0.22 (ma	ax. 0.30)		0.22 (max. 0.7	0)	Pass	
Party wall		0.00 (ma	ax. 0.20)		-	Pass		
Floor		0.11 (ma	ax. 0.25)		0.11 (max. 0.7	Pass		
Roof		0.11 (ma			0.11 (max. 0.3	Pass		
Openings		1.19 (ma	(max. 2.00) 1.20 (max. 3.30)					
2a Thermal bridg	ing							
Thermal bridg	ing calculated from	linear therma	al transmitt	ances for each	junction			
3 Air permeabilit	Y.							
Air permeability at 50 pascals			5.01 (design value)			m³/(h.m²) @ 50 Pa		
			10.0			m ³ /(h.m ²) @ 50 P	a Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35 Combi boiler	
	Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1700 0.1800	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sur	nmer	
9 Summertime temperature		
Overheating risk (Southern England)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	5.35 m ² , No overhang	
Windows facing South	7.84 m², No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with I	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m³/(h.m²) @ 50) Pa
Air permeability at 50 pascals Maximum	5.01 (design value) m³/(h.m²) @ 50 10.0 m³/(h.m²) @ 50	
Maximum		
Maximum 10 Key features	10.0 m ³ /(h.m ²) @ 50	
Maximum 10 Key features Party wall U-value	0.00 m³/(h.m²) @ 50	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 86	B 90	Recommended
Photovoltaic	£3,500 - £5,500	£404	A 97	A 100	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£430	A 97	A 100	

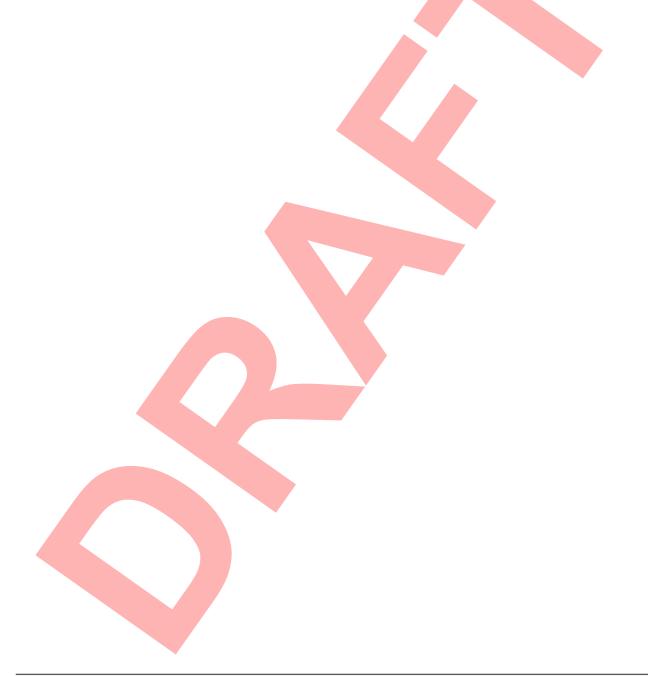

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

