PREDICTED ENERGY ASSESSMENT




Plot 175, 3 Bed, K. WC. B. ES Dwelling type: Bungalow, Detached

Date of assessment: 24/10/2022
Produced by: Henry Knight
Total floor area: 105.13 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

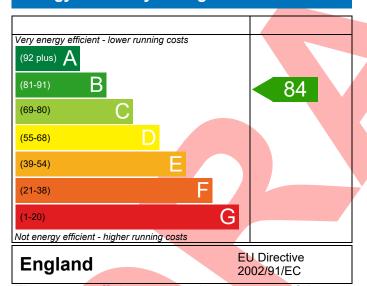

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

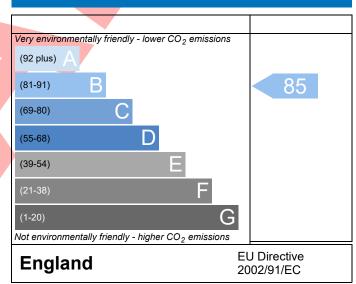

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-U528	-6651-175			Issued on Date	24/10/2022		
Assessment 175							
Reference							
Property Plot 175, 3	Bed, K, WC, B, ES						
SAP Rating	84 B	DER	17.70	TER	18.39		
Environmental	85 B	% DER <ter< td=""><td></td><td>3.73</td><td></td></ter<>		3.73			
CO ₂ Emissions (t/year)	1.56	DFEE	53.98	TFEE	57.90		
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>6.77</td><td></td></tfee<>		6.77			
Assessor Details Mr. Henry Knig	ght, Henry Knight, Tel: 011	73183565,		Assessor ID	U528-0001		
Henry.knight@							
Client VISTRY Homes							
SUMARY FOR INPUT DATA FOR Nev	w Build (As Designed)						
Criterion 1 – Achieving the TER and	TFEE rate						
1a TER and DER							
Fuel for main heating	Mains	gas					
Fuel factor	1.00 (mains gas)	<u>'</u>				
Target Carbon Dioxide Emission	Rate (TER) 18.39	18.39 kgCO2/m2					
Dwelling Carbon Dioxide Emissio	n Rate (DER) 17.70	17.70 kgCO ₂ /m ²					
	-0.69	(-3.8%)		kgCO ₂ /m ²			
1b TFEE and DFEE							
Target Fabric Energy Efficiency (1		57.90 kWh/m²/yr					
Dwelling Fabric Energy Efficiency				kWh/m²/yr			
	-3.9 (-	6.7%)		kWh/m²/yr	Pass		
Criterion 2 – Limits on design flexib	ility						
Limiting Fabric Standards							
2 Fabric U-values							
Element	Average		lighest				
External wall	0.25 (max. 0.30)	0	.25 (max. 0.70	0)	Pass		
Party wall	0.00 (max. 0.20)	-			Pass		
Floor	0.18 (max. 0.25)	,			Pass Pass		
Roof	0.17 (max. 0.20)						
Openings	1.53 (max. 2.00)	2	76 (max. 3.30))	Pass		
2a Thermal bridging							
Thermal bridging calculated f	rom linear thermal transm	nittances for each ju	inction				
3 Air permeability							
Air permeability at 50 pascals		design value)		m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0			m ³ /(h.m ²) @ 50 Pa	Pass		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	1 433
Boiler interlock	Yes	Pass
7 Low energy lights	Tes	
Percentage of fixed lights with low-energy	100 %	
fittings	100 /6	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sur	mmer	
Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	\neg
Windows facing North	3.93 m², No overhang	一
Windows facing East	1.91 m ² , No overhang	
Windows facing South	7.55 m², No overhang	_
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
	W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
LO Key features		
Party wall U-value	0.00 W/m²K	
Door U-value	0.90 W/m²K	
Window U-value	0.90 W/m²K	
Thermal bridging y-value	0.023 W/m ² K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 85	B 86	Recommended
Photovoltaic	£3,500 - £5,500	£373	A 94	A 94	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£400	A 94	A 94	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19