PREDICTED ENERGY ASSESSMENT




Plot 357, 3 Bed, K. WC. B. ES Dwelling type: House, Detached

Date of assessment: 09/09/2021
Produced by: Eloise Utley
Total floor area: 80.36 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

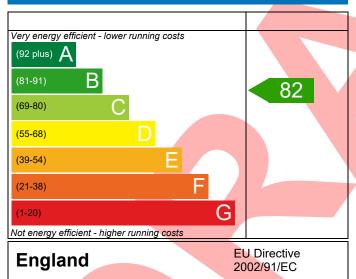

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

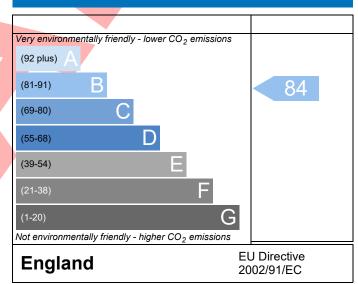

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-0026-5526	5-357			Issued on Date	09/09/2021
Assessment Plot 357		Pro	op Type Ref	veleigh - Det - OP	
Reference		·			
Property Plot 357, 3 Bed,	K, WC, B, ES				
SAP Rating	82 B	DER	19.83	TER	19.92
Environmental	84 B	% DER <ter< td=""><td></td><td>0.46</td><td></td></ter<>		0.46	
CO₂ Emissions (t/year)	1.34	DFEE	53.87	TFEE	60.13
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>10.40</td><td></td></tfee<>		10.40	
	lvio Junges, Tel: 01884	242050,		Assessor ID	T714-0001
silvio.junges@aesso	uthern.co.uk				
Client					
SUMARY FOR INPUT DATA FOR New Bui	ld (As Designed)				
Criterion 1 – Achieving the TER and TFEE	rate				
1a TER and DER					
Fuel for main heating	Mains g	as			
Fuel factor	1.00 (m	ains gas)			
Target Carbon Dioxide Emission Rate	(TER) 19.92	19.92 kgCO ₂ /m ²			
Dwelling Carbon Dioxide Emission Rat	e (DER) 19.83			kgCO₂/m²	Pass
1h TEEF and DEEF	-0.09 (-0).5%)		kgCO ₂ /m ²	
1b TFEE and DFEE	60.42			1.34/1- / 2 /	
Target Fabric Energy Efficiency (TFEE)		60.13 kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DFE	53.87 -6.2 (-10	1 2%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility	-0.2 (-10	0.370		KVVII/III / yI	F d 3 3
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average	u:	ghest		
External wall	0.25 (max. 0.30)		25 (max. 0.70)		Pass
Party wall	0.00 (max. 0.20)	-	25 (max. 0.70)		Pass
Floor	0.19 (max. 0.25)	0	19 (max. 0.70)		Pass
Roof	0.12 (max. 0.20)	0.12 (max. 0.70)			Pass
Openings	1.36 (max. 2.00)	` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` ` `			
2a Thermal bridging					
Thermal bridging calculated from I	inear thermal transmit	tances for each jun	nction		
3 Air permeability					
Air permeability at 50 pascals	5.01 (de	5.01 (design value)			
Maximum	10.0	·		m³/(h.m²) @ 50 Pa	
Limiting System Efficiencies					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sum	mer			
9 Summertime temperature				
Overheating risk (South East England)	Slight	Pass		
Based on:		_		
Overshading	Average			
Windows facing North East	7.13 m², No overhang			
Windows facing South West Windows facing North West	4.47 m ² , No overhang 2.13 m ² , No overhang			
Air change rate	4.00 ach	1		
Blinds/curtains	None	1		
Criterion 4 – Building performance consistent with D	ER and DFEE rate			
Party Walls				
Туре	U-value			
	W/m²K	Pass		
Air permeability and pressure testing				
3 Air permeability				
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass		
10 Key features				
Party wall U-value	0.00 W/m²K			
Roof U-value	0.12 W/m²K			
Door U-value	1.10 W/m²K			
Window U-value	0.90 W/m²K			
Thermal bridging y-value	0.030 W/m²K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 84	B 86	Recommended
Photovoltaic	£3,500 - £5,500	£369	A 94	A 96	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£395	A 94	A 96	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16