PREDICTED ENERGY ASSESSMENT




Plot 004, 2 Bed, K. B Dwelling type: Flat, Detached
Date of assessment: 20/10/2022
Produced by: Silvio Junges
Total floor area: 71.17 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating



The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

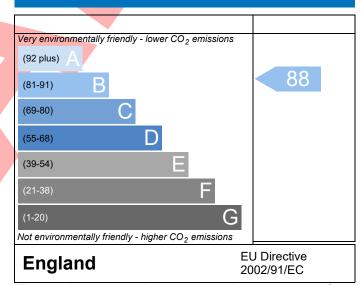

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Referenc	e 4907-0023-5953-004				Issued on Date	20/10/2022		
Assessment	Plot 004		op Type Ref	F05L - Det (As)				
Reference								
Property	Plot 004, 2 Bed, K, B							
SAP Rating		85 B	DER	15.91	TER	17.50		
Environmental		88 B	% DER <ter< td=""><td></td><td>9.11</td><td></td></ter<>		9.11			
CO ₂ Emissions (t/y	•	0.91	DFEE	40.62	TFEE	45.70		
General Requirem	ents Compliance	Pass	% DFEE <tfee< td=""><td></td><td>11.12</td><td></td></tfee<>		11.12			
Assessor Details	Mr. Silvio Junges, Silvio Jung	ges, Tel: 01884 2	242050,		Assessor ID	P637-0001		
	silvio.junges@aessc.co.uk							
Client								
SUMARY FOR INPU	T DATA FOR New Build (As D	esigned)						
Criterion 1 – Achiev	ving the TER and TFEE rate							
1a TER and DER								
Fuel for main he	eating	Mains ga	as					
Fuel factor		1.00 (ma	1.00 (mains gas)					
Target Carbon D	Dioxide Emission Rate (TER)	17.50	17.50 kgCO ₂ /m ²					
Dwelling Carbor	n Dioxide Emission Rate (DER)	15.91	15.91 kgCO ₂ /m ²					
		-1.59 (-9	.1%)		kgCO ₂ /m ²			
1b TFEE and DFEE								
_	ergy Efficiency (TFEE)	45.70		-	kWh/m²/yr			
Dwelling Fabric	Energy Efficiency (DFEE)	40.62						
Cuitanian 2 Limita	and dealers flexibilities	-5.1 (-11	.2%)		kWh/m²/yr	Pass		
	on design flexibility							
Limiting Fabric S								
2 Fabric U-value								
Element		rage		ghest	- >			
External		1 (max. 0.30)	0.3	24 (max. 0.70	0)	Pass		
Party wa		0 (max. 0.20) -			0)	Pass Pass		
Openings		9 (max. 2.00)	max. 2.00) 1.20 (max. 3.30)					
2a Thermal brid		ormal transmi+	tancos for each i	ection				
	Iging calculated from linear th	ermai transmitt	lances for each Jun	ICCIOII				
3 Air permeabil		F 04 / 1	ai ara valve \		3//5 2\ 0.50.5	1-		
	ility at 50 pascals		sign value)	$m^3/(h.m^2) @ 50 P$				
Maximum	- Efficiencies	10.0			m ³ /(h.m ²) @ 50 P	a Pass		
Limiting System								
4 Heating efficie	ency							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler Efficiency: 89.6% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings	100	
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1700 0.1800	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sur	nmer	
9 Summertime temperature		
Overheating risk (Southern England)	Medium	Pass
Based on:		
Overshading	Average	7
Windows facing North	1.66 m², No overhang	Ī
Windows facing East	7.15 m², No overhang	
Windows facing West	8.57 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
	W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m ² K	
Door U-value	1.10 W/m²K	
Door U-value	1.10 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 85	B 88	

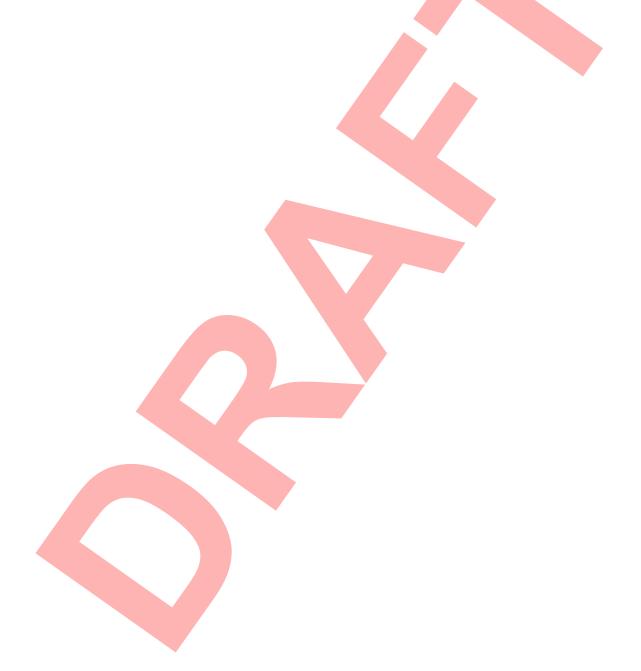

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

