PREDICTED ENERGY ASSESSMENT



Plot 444, 2B, 1B, + side window Dwelling type: House, End-Terrace


Date of assessment: 26/01/2023
Produced by: Jennifer Bantin

Total floor area: 82.9 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

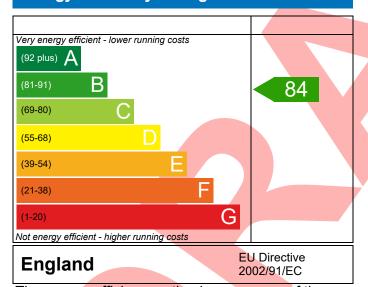

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

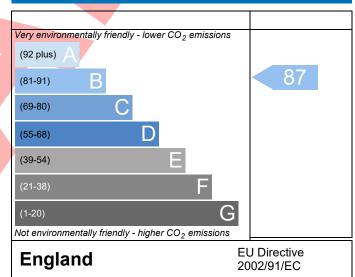

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-AM89-651	4-444			Issued on Date	26/01/2023			
Assessment	444	Prop Type Ref AA31 (V1) End As							
Reference Property	Plot 444, 2B, 1B,	+ side window							
	1100 444, 20, 10,								
SAP Rating		84 B	DER	17.06	TER	18.39			
Environmental	<u>, </u>	87 B	% DER <ter< td=""><td>1001</td><td>7.25</td><td>=</td></ter<>	1001	7.25	=			
CO ₂ Emissions (t/year)		1.18	DFEE	46.61	TFEE	51.46			
General Requiremen	its Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.41</td><td></td></tfee<>		9.41				
Assessor Details		Assessor ID	AM89-0001						
	Jennifer.bantin@aes	ssc.co.uk							
Client									
SUMARY FOR INPUT	DATA FOR New Buil	d (As Designed)							
Criterion 1 – Achievir	g the TER and TFEE	rate							
1a TER and DER									
Fuel for main heat	ing	Mains	gas						
Fuel factor		1.00 (n	nains gas)						
Target Carbon Dio	TER) 18.39	18.39 kgCO ₂ /							
Dwelling Carbon D	e (DER) 17.06	17.06 kgCO ₂ /m ²							
		-1.33 (-7.2%)		kgCO ₂ /m ²				
1b TFEE and DFEE									
Target Fabric Ener	51.46			kWh/m²/yr					
Dwelling Fabric En				kWh/m²/yr					
		-4.9 (-9	2.5%)		kWh/m²/yr	Pass			
Criterion 2 – Limits o	n design flexibility								
Limiting Fabric Sta	andards								
2 Fabric U-values									
Element		Average		Highest					
External wa	all	0.25 (max. 0.30)	(max. 0.30) 0.25 (max. 0.70)		0)	Pass			
Party wall		0.00 (max. 0.20)	(max. 0.20)			Pass			
Floor		0.16 (max. 0.25)		0.16 (max. 0.70	•	Pass			
Roof		0.11 (max. 0.20)		0.11 (max. 0.3	•	Pass			
Openings		1.42 (max. 2.00)	(max. 2.00) 1.50 (max. 3.30)						
2a Thermal bridgi	ng								
Thermal bridgi	ng calculated from I	inear thermal transm	ittances for each j	unction					
3 Air permeability									
Air permeabili	ty at 50 pasc <mark>als</mark>	5.01 (d	esign value)		а				
		10.0			m ³ /(h.m ²) @ 50 Pa				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1800 0.1600	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sun	nmer	
9 Summertime temperature		
Overheating risk (South West England)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North East	1.11 m², No overhang	
Windows facing South East	3.47 m², No overhang	
Windows facing North West	5.46 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with I	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m ² K	
Roof U-value	0.11 W/m ² K	
▼		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£30	B 85	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£357	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£387	A 96	A 98	

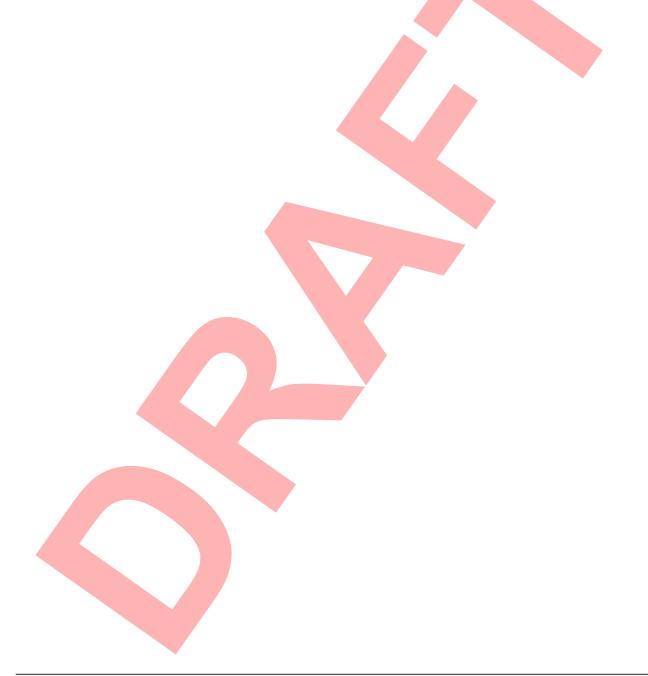

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19