
PREDICTED ENERGY ASSESSMENT



Plot 358, 4 Bed, K, WC, B, ES Dwelling type: Date of assessment: Produced by: Total floor area: House, Detached 17/11/2022 Aymon Winter 105.58 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

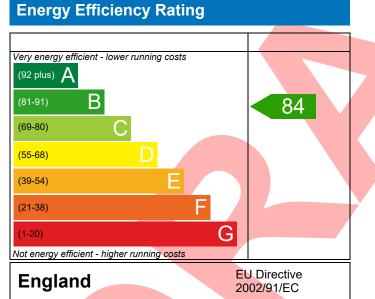

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

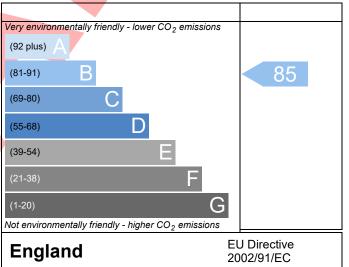

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Page 1 of 4

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Reference								
Property	Plot 358, 4 Bed, K	, WC, B, ES						
SAP Rating			84 B	DER	17.47	TER	17.76	
Environmental			85 B	% DER <ter< th=""><th></th><th>1.63</th><th></th></ter<>		1.63		
CO ₂ Emissions (t/yea	ar)		1.63	DFEE	48.82	TFEE	54.97	
General Requirements Compliance			Pass	% DFEE <tfee< td=""><td></td><td></td></tfee<>				
	Mr. Aymon Winter, A aymon.winter@aesso		er, Tel: 01	184242050,		Assessor ID	au06-0001	
Client								
SUMARY FOR INPUT	DATA FOR New Build	l (As Design	ed)					
Criterion 1 – Achievir	ng the TER and TFEE r	ate						
1a TER and DER								
Fuel for main heat	ting		Mains g	as				
Fuel factor			1.00 (ma	ains gas)				
Target Carbon Dioxide Emission Rate (TER)			17.76			kgCO ₂ /m ²		
Dwelling Carbon Dioxide Emission Rate (DER)		(DER)	17.47			kgCO ₂ /m ²	Pass	
			-0.29 (-1	1.6%)		kgCO ₂ /m ²		
Lb TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)			54.97			kWh/m²/yr		
Dwelling Fabric Er	nergy Efficiency (DFEE)	48.82			kWh/m²/yr		
			-6.2 (-11	1.3%)		kWh/m²/yr	Pass	
Criterion 2 – Limits o				_				
Limiting Fabric Sta								
2 Fabric U-values								
Element		Average	0.20)		Highest			
	External wall 0.25 (r					0)	Pass	
Party wall Floor		0.00 (ma 0.17 (ma			-		Pass	
Roof				, , ,			Pass Pass	
Openings		1.36 (ma	nax. 0.20) 0.12 (max. 0.35) nax. 2.00) 1.40 (max. 3.30)			,	Pass	
2a Thermal bridgi	ing	1.50 (110	x. 2.00)		1.40 (max. 5.5	0)	1 4 3 3	
	ing calculated from lir	a a a tharma	ltransmit	tancos for oach	iunction			
Ū	-		1 (141151111)		junction			
<u>3 Air permeability</u>			F 04 /-!			3//1	_	
Air permeability at 50 pascals Maximum			5.01 (design value)			$m^{3}/(h.m^{2}) @ 50 Pa$ $m^{3}/(h.m^{2}) @ 50 Pa$		
			10.0			m³/(h.m²) @ 50 Pa	a Pass	
Limiting System E								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009	Pass
	Minimum: 88.0%	
Secondary heating system	None	
<u>5 Cylinder insulation</u>		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
<u>7 Low energy lights</u>		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in s	ummer	
9 Summertime temperature		
Overheating risk (Midlands)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North East	0.66 m ² , No overhang	
Windows facing South East Windows facing North West	5.44 m ² , No overhang 7.29 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent wit		
Party Walls		
Туре	U-value	
	W/m²K	Pass
Air permeability and pressure testing		
<u>3 Air permeability</u>		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
<u>10 Key features</u>		
Party wall U-value	0.00 W/m ² K	
Roof U-value	0.12 W/m²K	
Door U-value	1.12	
	1.10 W/m²K	
Window U-value	1.10 W/m²K 0.90 W/m²K 0.030 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£31	B 85	B 87	Recommended
Photovoltaic	£5,000 - £8,000	£322	A 94	A 95	Recommended
Wind turbine			0	0	Not applicable
Totals	£9,000 - £14,000	£353	A 94	A 95	
Totals	19,000 114,000	2333	A JA	A 33	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19