PREDICTED ENERGY ASSESSMENT




Plot 231, 3 Bed, K. WC. B. ES Dwelling type: House, Semi-Detached

Date of assessment: 02/11/2020
Produced by: Silvio Junges
Total floor area: 71.56 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

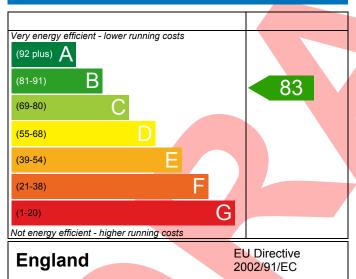

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

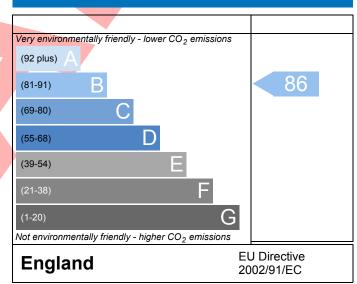

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-0023-4930-23	1			Issued on Date	02/11/2020	
Assessment 231		Pro	op Type Ref	Emmett - Semi (As)		
Reference						
Property Plot 231, 3 Bed, K, V	VC, B, ES					
SAP Rating	83 B	DER	18.74	TER	18.86	
Environmental	86 B	% DER <ter< td=""><td></td><td>0.65</td><td></td></ter<>		0.65		
CO₂ Emissions (t/year)	1.11	DFEE	47.12	TFEE	51.49	
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>8.49</td><td></td></tfee<>		8.49		
Assessor Details Mr. Silvio Junges, Silvio	Junges, Tel: 01884	242050,		Assessor ID	P637-0001	
silvio.junges@aessouth	ern.co.uk					
Client						
SUMARY FOR INPUT DATA FOR New Build (A	As Designed)					
Criterion 1 – Achieving the TER and TFEE rate	е					
1a TER and DER						
Fuel for main heating	Mains g	as				
Fuel factor	1.00 (ma	ains gas)				
Target Carbon Dioxide Emission Rate (TER			kgCO₂/m²			
Dwelling Carbon Dioxide Emission Rate (D	ER) 18.74	18.74 kgCO ₂ /m ²				
	-0.12 (-0	0.6%)		kgCO₂/m²		
1b TFEE and DFEE						
Target Fabric Energy Efficiency (TFEE)		51.49 kWh/m²/yr				
Dwelling Fabric Energy Efficiency (DFEE)	47.12	T0/)		kWh/m²/yr kWh/m²/yr	Dace	
Criterion 2 – Limits on design flexibility	[-4.4 (-8.	0%)		KVVII/III-/yr	Pass	
		_				
Limiting Fabric Standards						
2 Fabric U-values			ala a at			
Element External wall	Average		ghest	0)	Docc	
Party wall	0.25 (max. 0.30) 0.00 (max. 0.20)	U.,	25 (max. 0.70	0)	Pass Pass	
	0.18 (max. 0.25)	0	18 (max. 0.70	0)	Pass	
	0.14 (max. 0.20)		•	Pass		
Openings	1.36 (max. 2.00)	·				
2a Thermal bridging			,	,	Pass	
Thermal bridging calculated from linea	ar thermal transmit	tances for each iur	nction			
3 Air permeability						
Air permeability at 50 pascals	5 01 (de	sign value)		m³/(h.m²) @ 50 Pa	1	
Maximum	10.0			m³/(h.m²) @ 50 Pa		
Limiting System Efficiencies				,, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes			
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sur	nmer			
9 Summertime temperature				
Overheating risk (Thames Valley)	Slight	Pass		
Based on:				
Overshading	Average			
Windows facing North	3.94 m², No overhang			
Windows facing South	7.29 m², No overhang			
Windows facing West	0.66 m², No overhang			
Air change rate	4.00 ach			
Blinds/curtains	None			
Criterion 4 – Building performance consistent with	DER and DFEE rate			
Party Walls				
Туре	U-value			
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass		
Air permeability and pressure testing				
3 Air permeability				
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass		
10 Key features				
Party wall U-value	0.00 W/m²K			
Door U-value	1.10 W/m²K			
Door U-value	0.90 W/m²K			
Window U-value	0.90 W/m²K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£28	B 84	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£341	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£369	A 96	A 98	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

