#### PREDICTED ENERGY ASSESSMENT




21, Matford Home Park, Dwelling type: Flat, Semi-Detached

Exeter, Date of assessment: 03/10/2020 Devon, Produced by: Stuart Milne EX1 Total floor area: 70.53 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

#### **Energy Efficiency Rating**

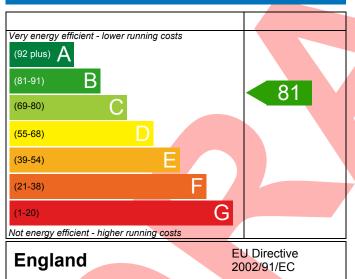

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### Environmental Impact (CO<sub>2</sub>) Rating

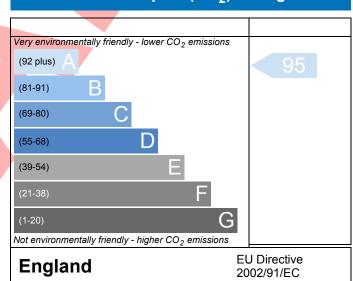

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



| Property Reference                        | Matford 021                            |             |                 |   |                | Issued on Date                    | 03/10/2020 |  |
|---|--|-------------|-----------------|---|----------------|-----------------------------------|------------|--|
| Assessment                                | 1                                      |             |                 |   |                |                                   |            |  |
| Reference                                 |  |             |                 |   |                |                                   |            |  |
| Property                                  | 21, Matford Hom                        | e Park, Exe | ter, Devor      | ı, EX1  |                |                                   |            |  |
| SAP Rating                                |  |             | 81 B            | DER   | 6.05           | TER                               | 17.60      |  |
| Environmental                             |  |             | 95 A            | % DER <ter< td=""><td></td><td>65.62</td><td></td></ter<> |                | 65.62                             |            |  |
| CO₂ Emissions (t/y                        | ear)                                   |             | 0.37            | DFEE  | 41.97          | TFEE                              | 45.04      |  |
| General Requirements Compliance           |  |             | Pass            | % DFEE <tfe< th=""><th></th><th>6.82</th><th></th></tfe<> |                | 6.82                              |            |  |
| Assessor Details                          | Mr. Stuart Milne, Stusap@mendipenergy. |             | Tel: 01934      | 742386,   |                | Assessor ID                       | L721-0001  |  |
| Client                                    | Cavanna Homes                          |             |                 |   |                |                                   |            |  |
| SUMARY FOR INPU                           | T DATA FOR New Build                   | d (As Desig | ned)            |   |                |                                   |            |  |
| Criterion 1 – Achiev                      | ing the TER and TFEE I                 | rate        |                 |   |                |                                   |            |  |
| 1a TER and DER                            |  |             |                 |   |                |                                   |            |  |
| Fuel for main he                          | ating                                  |             | Biomas          | s (c)   |                |                                   |            |  |
| Fuel factor                               |  |             | 1.00 (bi        | omass)  |                |                                   | Ī          |  |
| Target Carbon Dioxide Emission Rate (TER) |  |             | 17.60           |   |                | kgCO <sub>2</sub> /m <sup>2</sup> |            |  |
| Dwelling Carbon                           | Dioxide Emission Rate                  | (DER)       | 6.05            |   |                | kgCO <sub>2</sub> /m <sup>2</sup> | Pass       |  |
|   |  |             | -11.55 (        | -65.6%)   |                | kgCO₂/m²                          |            |  |
| 1b TFEE and DFEE                          |  |             |                 |   |                |                                   |            |  |
| Target Fabric Energy Efficiency (TFEE)    |  |             | 45.04 kWh/m²/yr |   |                |                                   |            |  |
| Dwelling Fabric Energy Efficiency (DFEE)  |  | <b>(</b> )  | 41.97 kWh/m²/yr |   |                |                                   |            |  |
|   |  |             | -3.0 (-6        | .7%)  |                | kWh/m²/yr                         | Pass       |  |
| Criterion 2 – Limits                      | on design flexibility                  |             |                 |   |                |                                   |            |  |
| Limiting Fabric S                         | tandards                               |             |                 |   |                |                                   |            |  |
| 2 Fabric U-value                          | <u>s</u>                               |             |                 |   |                |                                   |            |  |
| Element                                   |  | Average     | е               |   | Highest        |                                   |            |  |
| External v                                | wall                                   | 0.25 (m     | ax. 0.30)       |   | 0.25 (max. 0.7 | 0)                                | Pass       |  |
| Party wal                                 | ı 🖊                                    | 0.00 (m     | ax. 0.20)       |   | -              |                                   | Pass       |  |
| Roof                                      |  | 0.11 (m     | ax. 0.20)       |   | 0.11 (max. 0.3 | 5)                                | Pass       |  |
| Openings                                  |  | 1.20 (m     | ax. 2.00)       |   | 1.20 (max. 3.3 | 0)                                | Pass       |  |
| 2a Thermal brid                           | ging                                   |             |                 |   |                |                                   |            |  |
| Thermal brid                              | ging calculated from li                | near therm  | al transmi      | ttances for each  | junction       |                                   |            |  |
| 3 Air permeabili                          | ty                                     |             |                 |   |                |                                   |            |  |
| Air permeabi                              | lity at 50 pascals                     |             | 7.00 (de        | esign value)  |                | m³/(h.m²) @ 50 Pa                 |            |  |
| Maximum                                   |  |             | 10.0            | ,   |                | m³/(h.m²) @ 50 Pa                 | Pass       |  |
| <b>Limiting System</b>                    | Efficiencies                           |             |                 |   |                |                                   |            |  |
| 4 Heating efficie                         |  |             |                 |   |                |                                   |            |  |
| Main heating system                       |  |             | Commu           | _   |                |                                   |            |  |
| Secondary heating system                  |  |             | None            |   |                |                                   |            |  |
|   | ntion                                  |             |                 |   |                |                                   |            |  |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r10

# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



| Hot water storage                                      | No cylinder   |       |
|--|---|-------|
| <u>6 Controls</u>                                      |   |       |
| Space heating controls                                 | Flat rate charging, programmer and TRVs                         | Pass  |
| Hot water controls                                     | No cylinder   |       |
| 7 Low energy lights                                    |   |       |
| Percentage of fixed lights with low-energy fittings    | 100 %   |       |
| Minimum  | 75 %  | Pass  |
| 8 Mechanical ventilation                               |   |       |
| Not applicable   |   |       |
| Criterion 3 – Limiting the effects of heat gains in su | mmer  |       |
| 9 Summertime temperature                               |   |       |
| Overheating risk (South West England)                  | Slight  | Pass  |
| Based on:  |   |       |
| Overshading  | Average   |       |
| Windows facing East                                    | 1.93 m², No overhang  |       |
| Windows facing West                                    | 6.16 m², No overhang  |       |
| Air change rate  | 0.00 ach  |       |
| Blinds/curtains  | None  |       |
| Criterion 4 – Building performance consistent with     | DER AND DEEL FALE   |       |
| Party Walls  |   |       |
| Type Filled Cavity with Edge Sealing                   | U-value<br>0.00 W/m²K   | Docs  |
| Air permeability and pressure testing                  | 0.00 W/III-K  | Pass  |
| 3 Air permeability                                     |   |       |
| Air permeability at 50 pascals                         | 7.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa |       |
| Maximum  | 10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa                | Pass  |
| 10 Key features  | 10.0  | 1 033 |
| Party wall U-value                                     | 0.00 W/m²K  |       |
| Roof U-value   | 0.11 W/m²K  |       |
| Community heating, Biomass                             | N/A   |       |
| 3, 33 6  | ,   |       |
|  |   |       |
|  |   |       |
|  |   |       |
|  |   |       |
|  |   |       |
|  |   |       |
|  |   |       |
|  |   |       |
|  |   |       |


This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **RECOMMENDATIONS**



|                     | Typical cost | Typical savings<br>per year | Energy<br>efficiency | Environmenta<br>I impact | Result            |
|---------------------|--------------|-----------------------------|----------------------|--------------------------|-------------------|
| Low energy lights   |              |                             | 0                    | 0                        | Already installed |
| Solar water heating |              |                             | 0                    | 0                        | Not applicable    |
| Photovoltaic        |              |                             | 0                    | 0                        | Not applicable    |
| Wind turbine        |              |                             | 0                    | 0                        | Not applicable    |
| Totals              | £0.          | £O                          | R 91                 | Λ 95                     |                   |

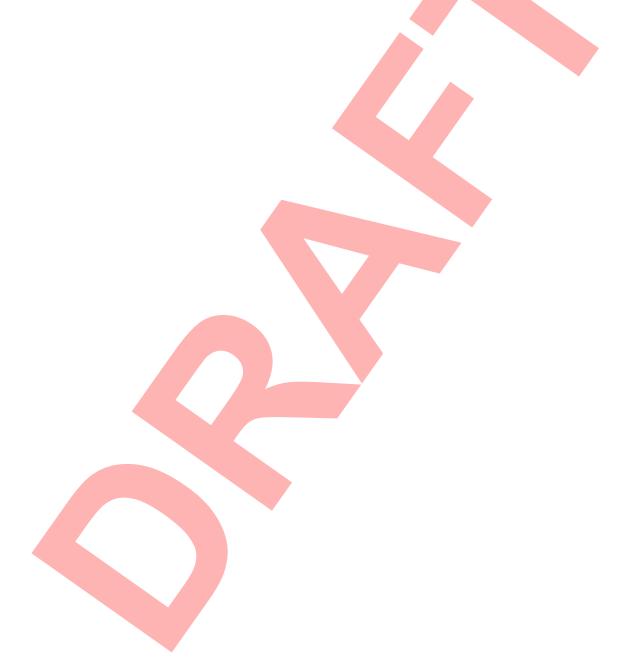

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

