PREDICTED ENERGY ASSESSMENT




Plot 10, 2 Bed, K.WC.B Dwelling type: House, Semi-Detached

Date of assessment: 30/03/2023
Produced by: Henry Knight
Total floor area: 77.28 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

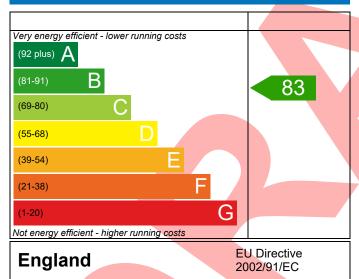

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

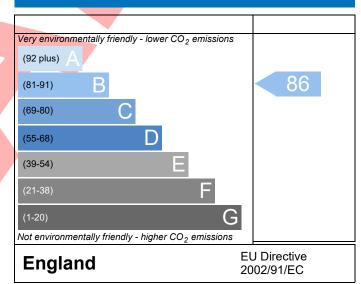

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-U528-5247-01	10		Is	ssued on Date	30/03/2023		
Assessment	010 Prop Type Ref 2B5P Block 5 (AS)							
Reference								
Property	Plot 10, 2 Bed, K,W	C,B						
SAP Rating		83 B	DER	18.60	TER	18.98		
Environmental		86 B	% DER <ter< td=""><td></td><td>2.02</td><td></td></ter<>		2.02			
CO₂ Emissions (t/year	·)	1.15	DFEE	49.42	TFEE	54.59		
General Requirement	s Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.47</td><td></td></tfee<>		9.47			
	Ar. Silvio Junges, Silvio	_	242050,		Assessor ID	U528-0001		
	ilvio.junges@aessc.co.							
Client	ISTRY GROUP, Partner	hsips						
SUMARY FOR INPUT D	ATA FOR New Build (As Designed)						
Criterion 1 – Achieving	the TER and TFEE rat	e						
La TER and DER								
Fuel for main heati	ng	Mains g	as					
Fuel factor	1.00 (m	1.00 (mains gas)						
Target Carbon Diox	18.98	18.98 kgCO ₂ /m ²						
Dwelling Carbon Di	DER) 18.60	18.60 kgCO ₂ /m ²						
		-0.38 (-2	2.0%)		kgCO ₂ /m ²			
Lb TFEE and DFEE								
Target Fabric Energ		54.59 kWh/m²/yr						
Dwelling Fabric Ene	ergy Efficiency (DFEE)	49.42			kWh/m²/yr			
		-5.2 (-9.	5%)		kWh/m²/yr	Pass		
Criterion 2 – Limits on	-		_					
Limiting Fabric Star	ndards							
2 Fabric U-values								
Element		Average			ighest			
External wal		0.22 (max. 0.30)	0	.22 (max. 0.70)	Pass			
Party wall			00 (max. 0.20) -			Pass		
Floor		0.10 (max. 0.25)		.10 (max. 0.70)		Pass		
Roof		0.11 (max. 0.20)		.11 (max. 0.35)	Pass			
Openings		1.35 (max. 2.00)	1	.40 (max. 3.30)		Pass		
2a Thermal bridgin								
	g calculated from line	ar thermal transmit	tances for each ju	nction				
3 Air permeability	. 50				2.44 2)			
Air permeability		esign value)		m³/(h.m²) @ 50 Pa				
Maximum	ficiencies	10.0		n	n³/(h.m²) @ 50 Pa	Pass		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35	Pass
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls	The dynamics	
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls		PdSS
	No cylinder	_
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North	4.19 m², No overhang	
Windows facing South	8.05 m ² , No overhang	
Windows facing West	2.16 m ² , No overhang	╛
Air change rate	8.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.11 W/m²K	
Floor U-value	0.10 W/m²K	
Door U-value	1.10 W/m²K	
2001 O Value	vv/III K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£74	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£672	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£747	A 96	A 98	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

