PREDICTED ENERGY ASSESSMENT




183, 3 Bed, K, B Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 21/07/2023 Silvio Junges 84 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

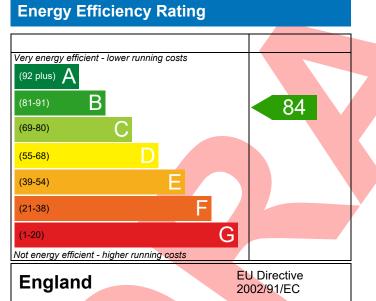

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

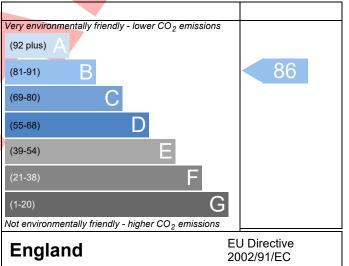

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Page 1 of 4

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-P637-6545-183 Issued on Date 21/07/202									
Assessment	183		Prop Type Ref M304 Informal Semi As							
Reference	183, 3 Bed, K, B									
Property	105, 5 Beu, R, B									
SAP Rating			84 B DER		17.33	TER	17.67			
Environmental	`		86 B	% DER <ter< td=""><td></td><td>1.94</td><td>50.04</td></ter<>		1.94	50.04			
CO ₂ Emissions (t/year			1.21	DFEE	45.67		50.04			
General Requirement	s Compliance		Pass	% DFEE <tfee< td=""><td></td><td>8.73</td><td></td></tfee<>		8.73				
	۲. Silvio Junges, Silvi، ilvio.junges@aessc.co	-	es, Tel: 01884 242050, Assessor ID P637-0001							
Client										
UMARY FOR INPUT D	ATA FOR New Build	(As Desig	ned)							
riterion 1 – Achieving	the TER and TFEE ra	ite								
a TER and DER										
Fuel for main heati	ng		Mains ga	as						
Fuel factor			1.00 (ma	iins gas)						
Target Carbon Diox	ide Emission Rate (TI	ER)	17.67			kgCO ₂ /m ²				
Dwelling Carbon Di	oxide Emission Rate	(DER)	17.33			kgCO ₂ /m ²	Pass			
			-0.34 (-1	.9%)		kgCO ₂ /m ²				
b TFEE and DFEE										
Target Fabric Energy Efficiency (TFEE)			50.04 kWh/m²/yr							
Dwelling Fabric Ene	ergy Efficiency (DFEE)		45.67			kWh/m²/yr				
			-4.3 (-8.6	5%)		kWh/m²/yr	Pass			
riterion 2 – Limits on										
Limiting Fabric Sta	ndards									
2 Fabric U-values										
Element		Average			Highest					
External wal			(max. 0.30) 0.25 (max. 0.70)			70)	Pass			
Party wall			(max. 0.20) -				Pass			
Floor			(max. 0.25) 0.18 (max. 0.70)				Pass			
Roof			(max. 0.20) 0.17 (max. 0.35)				Pass			
Openings		1.36 (m	5 (max. 2.00) 1.40 (max. 3.30)				Pass			
2a Thermal bridgin										
Thermal bridgin	g calculated from lin	ear therm	al transmit	ances for each	junction					
<u>3 Air permeability</u>										
Air permeability	at 50 pascals	5.01 (design value)			m³/(h.m²) @ 50 Pa					
, in pointeaunit,	Maximum					m³/(h.m²) @ 50 Pa Pass				
			10.0							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	Pass		
Secondary heating system	None			
5 Cylinder insulation				
Hot water storage	No cylinder			
6 Controls				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in sum	nmer			
9 Summertime temperature				
Overheating risk (Thames Valley)	Medium	Pass		
Based on:				
Overshading	Average			
Windows facing North East	7.30 m ² , No overhang]		
Windows facing South East Windows facing South West	1.44 m ² , No overhang 6.63 m ² , No overhang			
Air change rate	4.00 ach			
Blinds/curtains	None			
Criterion 4 – Building performance consistent with D		_]		
Party Walls				
Туре	U-value			
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass		
Air permeability and pressure testing		1 435		
3 Air permeability				
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa			
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass		
10 Key features		·		
Party wall U-value	0.00 W/m²K			
Door U-value	1.10 W/m ² K			
	· ·			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£27	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£335	A 96	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£362	A 96	A 97	
Totals	17,500 111,500	1302	A SU	A.57	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

