PREDICTED ENERGY ASSESSMENT




L193, 3 Bed, K. WC. B. ES Dwelling type: House, Semi-Detached

Date of assessment: 12/01/2023
Produced by: Silvio Junges
Total floor area: 80.36 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

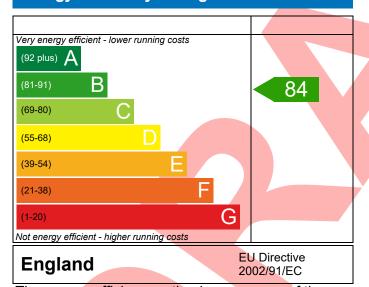

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

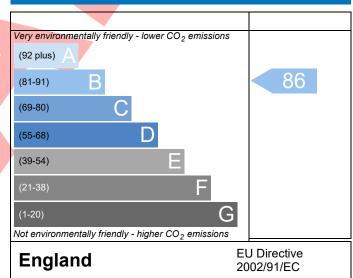

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-P637-6196	5-L193			Issued on Date	12/01/2023		
Assessment	L193 Prop Type Ref Eveleigh Semi OPP							
Reference	1402 2 Ded K V	NC D FC						
Property	L193, 3 Bed, K, V	/VC, B, ES						
SAP Rating		84 B	DER	17.94	TER	18.16		
Environmental		86 B	% DER <ter< td=""><td></td><td>1.18</td><td>-</td></ter<>		1.18	-		
CO ₂ Emissions (t/year)		1.19	DFEE	45.56	TFEE	50.20		
General Requireme	nts Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.25</td><td></td></tfee<>		9.25			
Assessor Details	Miss Maja Stanisz, N	Maja Stanisz, Tel: 0139	2 581 875,		Assessor ID	P637-0001		
	maja.stanisz@aessc	co.uk						
Client								
UMARY FOR INPUT	DATA FOR New Bui	ld (As Designed)						
Criterion 1 – Achievi	ng the TER and TFEE	rate						
1a TER and DER								
Fuel for main hea	ating	Mains g	gas					
Fuel factor			ains gas)					
Target Carbon Di	oxide Emission Rate ((TER) 18.16						
Dwelling Carbon	Dioxide Emission Rat	e (DER) 17.94						
		-0.22 (-1	1.2%)		kgCO ₂ /m ²			
Lb TFEE and DFEE								
Target Fabric Ene	ergy Efficiency (TFEE)	50.20	50.20 kWh/m²/yr					
Dwelling Fabric E	nergy Efficiency (DFE	EE) 45.56			kWh/m²/yr			
		-4.6 (-9.	2%)		kWh/m²/yr	Pass		
Criterion 2 – Limits o	on design flexibility							
Limiting Fabric St	tandards							
2 Fabric U-values								
Element		Average	н	ighest				
External w	/all	0.25 (max. 0.30)	0.	0.25 (max. 0.70)				
Party wall		0.00 (max. 0.20)	-	-				
Floor		0.18 (max. 0.25)	0.	0.18 (max. 0.70)				
Roof		0.17 (max. 0.20)	0.	.17 (max. 0.35)	Pass			
Openings		1.33 (max. 2.00)	(max. 2.00) 1.40 (max. 3.30			Pass		
2a Thermal bridg	ging							
Thermal bridg	ging calculated from I	linear thermal transmit	ttances for each jui	nction				
3 Air permeabilit	TY .							
Air permeabil	ity at 50 pasc <mark>als</mark>	5.01 (de	esign value)		m³/(h.m²) @ 50 Pa			
		10.0			m ³ /(h.m ²) @ 50 Pa	Pass		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Connecting system		
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing South East	6.99 m², No overhang	
Windows facing North West	4.53 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 - Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m ² K	
Door U-value	0.90 W/m²K	
Window U-value	0.90 W/m²K	
Thermal bridging y-value	0.036 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£26	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£373	A 95	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£398	A 95	A 98	

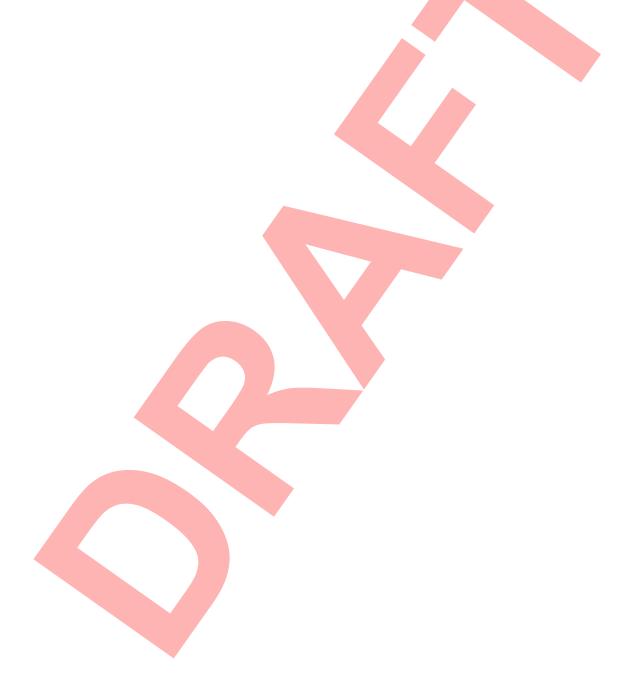

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

