PREDICTED ENERGY ASSESSMENT




A20, 119, 2 Bed, K. WC. B Dwelling type: House, Semi-Detached

Date of assessment: 15/08/2022
Produced by: Silvio Junges
Total floor area: 62.7 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

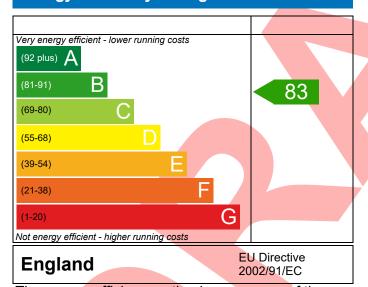

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

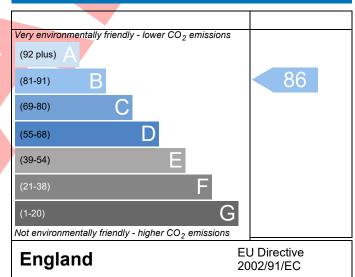

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-0015-5302	-119				Issued on Date	15/08/2022	
Assessment	119			Р	rop Type Ref	A20 Semi - Op		
Reference	A20, 119, 2 Bed,	V M/C P						
Property	A20, 119, 2 Bed,	K, WC, B				_,	,	
SAP Rating			83 B	DER	19.74	TER	19.89	
Environmental		86 B	% DER <ter< td=""><td></td><td>0.76</td><td></td></ter<>		0.76			
CO₂ Emissions (t/year)		1.09	DFEE	49.05	TFEE	53.96		
General Requireme	ents Compliance		Pass	% DFEE <tfee< td=""><td></td><td>9.11</td><td></td></tfee<>		9.11		
Assessor Details	Mr. Silvio Junges, Silvio Junges, Tel: 01884 242050,							
Client	silvio.junges@aessouthern.co.uk							
	T DATA FOR New Buil		igned)					
Criterion 1 – Achiev	ing the TER and TFEE	rate						
1a TER and DER								
Fuel for main he	ating		Mains gas					
Fuel factor			1.00 (mains gas)					
Target Carbon D	ioxide Emission Rate (TER)	19.89 kgCO ₂ /r					
Dwelling Carbon Dioxide Emission Rate (DER)			19.74	Pass				
4h TEEE DEEE			-0.15 (-0	.8%)		kgCO ₂ /m ²		
1b TFEE and DFEE			F2.06			134/1 / 2/		
Target Fabric Energy Efficiency (TFEE)			53.96			kWh/m²/yr		
Dwelling Fabric E	Energy Efficiency (DFE	E)	49.05	20(1)		kWh/m²/yr	Dana	
Cuitanian 2 Limita	an dasima flavibilia.		-5.0 (-9.3	3%)		kWh/m²/yr	Pass	
Criterion 2 – Limits								
Limiting Fabric S								
2 Fabric U-value	<u>s</u>							
Element		Avera	_		Highest			
External v			max. 0.30)	(0.25 (max. 0.7	0)	Pass	
Party wal			max. 0.20)		-	-1	Pass	
Floor		,	max. 0.25)		0.17 (max. 0.7		Pass	
Roof			max. 0.20)		0.14 (max. 0.3	Pass		
Openings		1.35 (.35 (max. 2.00) 1.40 (max. 3.30)				Pass	
2a Thermal brid								
	ging calculated from I	inear ther	mal transmitt	ances for each ju	unction			
3 Air permeabili						ı		
Air permeability at 50 pascals			5.01 (design value)			m³/(h.m²) @ 50 Pa		
Maximum			10.0			m³/(h.m²) @ 50 Pa	Pass	
Limiting System	Efficiencies							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 30	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Canadam hastina matam		
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Midlands)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North East	6.46 m², No overhang	
Windows facing South West	3.52 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	l
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m ² K	
Door U-value	1.10 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£23	B 84	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£369	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£392	A 96	A 99	

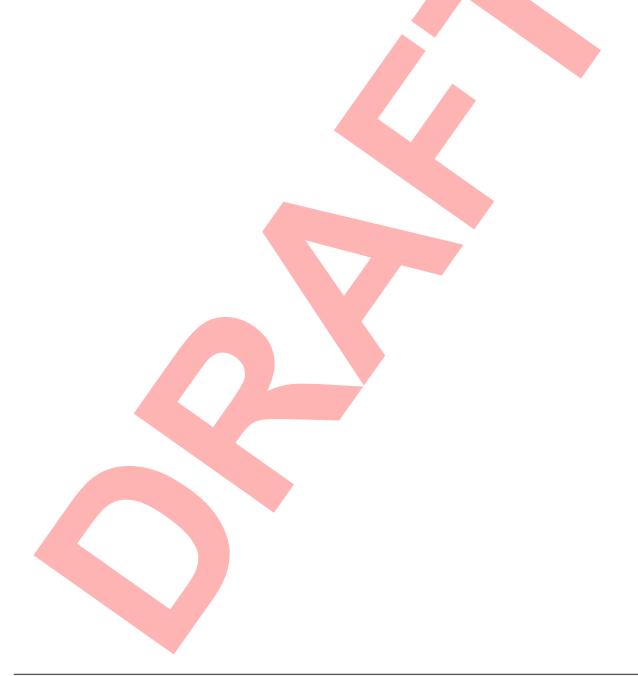

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

