PREDICTED ENERGY ASSESSMENT




A20, 118, 2 Bed, K. WC. B Dwelling type: House, Semi-Detached

Date of assessment: 15/08/2022
Produced by: Silvio Junges
Total floor area: 62.7 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating



The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

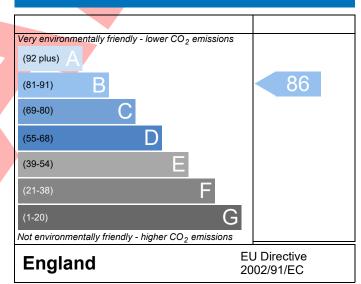

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-0015-5302-	118			Issued on Date	15/08/2022	
Assessment 118		Pr	op Type Ref	A20 Semi - As		
Reference						
Property A20, 118, 2 Bed,	K, WC, B					
SAP Rating	83 B	DER	19.74	TER	19.89	
Environmental	86 B	% DER <ter< td=""><td></td><td>0.76</td><td></td></ter<>		0.76		
CO₂ Emissions (t/year)	1.09	DFEE	49.05	TFEE	53.96	
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.11</td><td></td></tfee<>		9.11		
Assessor Details Mr. Silvio Junges, Silvi	_	84 242050,		Assessor ID	p637-0001	
silvio.junges@aessou	ithern.co.uk					
Client						
SUMARY FOR INPUT DATA FOR New Build	d (As Designed)					
Criterion 1 – Achieving the TER and TFEE I	ate					
1a TER and DER						
Fuel for main heating	Main	s gas				
Fuel factor	1.00	(mains gas)				
Target Carbon Dioxide Emission Rate (7	TER) 19.89	19.89 kgCO ₂ /m ²				
Dwelling Carbon Dioxide Emission Rate (DER)		19.74 kgCO ₂ /m ²				
4h TEEF and DEEF	-0.15	(-0.8%)		kgCO ₂ /m ²		
1b TFEE and DFEE	F2.06			1.3.4.15 / 2 /		
Target Fabric Energy Efficiency (TFEE)		53.96 kWh/m²/yr				
Dwelling Fabric Energy Efficiency (DFEE		-9.3%)		kWh/m²/yr kWh/m²/yr	Pass	
Criterion 2 – Limits on design flexibility	[-5:0]	-9.376)		KVVII/III / yI	F 033	
Limiting Fabric Standards						
2 Fabric U-values						
Element	Average		lighest			
External wall	0.25 (max. 0.30		.25 (max. 0.7	0)	Pass	
Party wall	0.00 (max. 0.20		.25 (max. 0.7	0)	Pass	
Floor	0.17 (max. 0.25		.17 (max. 0.7	0)	Pass	
Roof	0.14 (max. 0.20		.14 (max. 0.3	•	Pass	
Openings	1.35 (max. 2.00					
2a Thermal bridging						
Thermal bridging calculated from li	near thermal transi	mittances for each ju	nction			
3 Air permeability		,				
Air permeability at 50 pascals	5.01	5.01 (design value) m³/(h.			3	
Maximum	10.0			m³/(h.m²) @ 50 Pa		
Limiting System Efficiencies						

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass			
	Data from database				
	Ideal LOGIC COMBI ESP1 30				
	Combi boiler				
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%				
Canadam hastina matam					
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	No cylinder				
<u>6 Controls</u>					
Space heating controls	Programmer, room thermostat and TRVs				
Hot water controls	No cylinder				
Boiler interlock	Yes	Pass			
7 Low energy lights					
Percentage of fixed lights with low-energy	100 %				
fittings					
Minimum	75 %	Pass			
8 Mechanical ventilation					
Not applicable					
Criterion 3 – Limiting the effects of heat gains in su	mmer				
9 Summertime temperature					
Overheating risk (Midlands)	Not significant	Pass			
Based on:					
Overshading	Average				
Windows facing North East	6.46 m², No overhang				
Windows facing South West	3.52 m², No overhang				
Air change rate	4.00 ach				
Blinds/curtains	None				
Criterion 4 – Building performance consistent with	DER and DFEE rate				
Party Walls					
Туре	U-value				
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass			
Air permeability and pressure testing					
3 Air permeability					
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	l			
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass			
10 Key features					
Party wall U-value	0.00 W/m²K				
Door U-value	1.10 W/m²K				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£23	B 84	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£369	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£392	A 96	A 99	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

