PREDICTED ENERGY ASSESSMENT




Plot 235, 3 Bed, K. WC. B. ES Dwelling type: House, End-Terrace

Date of assessment: 02/11/2020
Produced by: Silvio Junges
Total floor area: 71.56 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

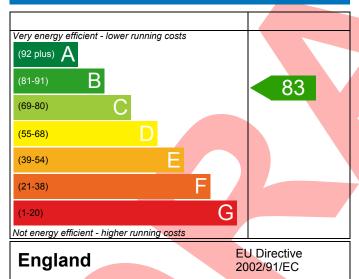

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

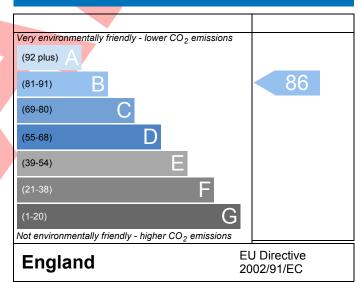

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



D	4007 0022 4020	225					Januari en Data	02/44/2020	
Property Reference	4907-0023-4930	1-235			Duo	n Tuna Daf	Issued on Date	02/11/2020	
Assessment Reference	235 Prop Type Ref Emmett - End (As)								
Property	Plot 235, 3 Bed,	K, WC, B,	ES						
SAP Rating			83 B	DER		19.19	TER	19.31	
Environmental			86 B	% DER <ter< td=""><td colspan="2"><ter< td=""><td>0.60</td><td></td></ter<></td></ter<>	<ter< td=""><td>0.60</td><td></td></ter<>		0.60		
CO ₂ Emissions (t/year)			1.13	DFEE	E		TFEE	54.17	
General Requiremen	ts Compliance		Pass	% DFEE <tf< td=""><td>EE</td><td></td><td>8.86</td><td></td></tf<>	EE		8.86		
Assessor Details	Mr. Silvio Junges, Sil	vio Junges	, Tel: 01884	242050,			Assessor ID	P637-0001	
	lvio.junges@aessouthern.co.uk								
Client									
SUMARY FOR INPUT	DATA FOR New Buil	d (As Des	gned)						
Criterion 1 – Achievin	g the TER and TFEE	rate							
La TER and DER									
Fuel for main heat	ing		Mains ga	as					
Fuel factor			1.00 (ma	ins gas)					
Target Carbon Dioxide Emission Rate (TER)			19.31				kgCO₂/m²		
Dwelling Carbon Dioxide Emission Rate (DER)			19.19 kgCO ₂ /					Pass	
			-0.12 (-0	.6%)			kgCO₂/m²		
Lb TFEE and DFEE									
Target Fabric Energy Efficiency (TFEE)			54.17				kWh/m²/yr		
Dwelling Fabric En	ergy Efficiency (DFE	E)	49.37				kWh/m²/yr		
			-4.8 (-8.9	9%)			kWh/m²/yr	Pass	
Criterion 2 – Limits or				_					
Limiting Fabric Sta	indards								
2 Fabric U-values									
Element		Avera	_			ghest			
External wa	III		0.25 (max. 0.30)			25 (max. 0.7	Pass		
Party wall			max. 0.20)		-	Pass			
Floor		0.18 (max. 0.25)			0.1	Pass Pass			
Roof Openings			0.14 (max. 0.20) 1. 36 (max. 2.00)			0.21 (max. 0.35) 1.40 (max. 3.30)			
2a Thermal bridgi	ag.	1.30 (111ax. 2.00j		1.4	iu (IIIdX. 3.3)	o)	Pass	
		in oar than	mal transm:	ancoc for car	sh i.u.s	ction			
	ng calculated from I	mear ther	ındı üdilSIIIIÜ	.aiices 101 ea(ai juit	CUUII			
3 Air permeability			E 01 /d=	sign value)			m3//h m2\ @ F0.5	10	
Air permeabilit	y at 50 pascals	it 30 pascais				$m^3/(h.m^2) @ 50 P$	-		
Maximum Limiting System E			10.0				m ³ /(h.m ²) @ 50 P	a Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sun	nmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Medium	Pass
Based on:		
Overshading	Average	
Windows facing East	7.29 m², No overhang	
Windows facing South	0.66 m², No overhang	
Windows facing West	3.94 m², No overhang	_
Air change rate	4.00 ach	_
Blinds/curtains	None	
Criterion 4 – Building performance consistent with I	DER and DEEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Door U-value	1.10 W/m²K	
Door U-value	0.90 W/m²K	
Window U-value	0.90 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£28	B 84	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£341	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£369	A 96	A 98	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

