#### PREDICTED ENERGY ASSESSMENT



Plot 108, Siskin Park, Land off Hartlepool


Road, Wynyard, Billingham, TS22 5GS Dwelling type: House, Detached

Date of assessment: 21/07/2021
Produced by: Jake Eaton
Total floor area: 104.1 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.

### **Energy Efficiency Rating**

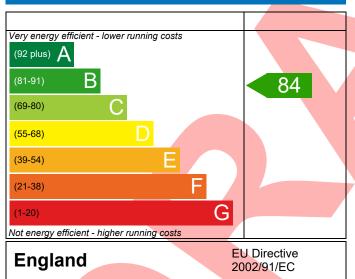

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

### Environmental Impact (CO<sub>2</sub>) Rating

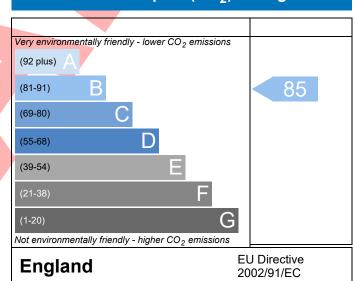

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Property Reference TS22 5GS Plot 1	08			Issued on Date	21/07/2021
Assessment 001		Pr	rop Type Ref	New Walton	
Reference					
Property Plot 108, Siskin	Park, Land off Hartlepo	ool Road, Wynyard	, Billingham, <sup>-</sup>	TS22 5GS	
SAP Rating	84 B	DER	17.09	TER	18.89
Environmental	85 B	% DER <ter< td=""><td></td><td>9.52</td><td></td></ter<>		9.52	
CO₂ Emissions (t/year)	1.66	DFEE	56.59	TFEE	63.14
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>10.38</td><td></td></tfee<>		10.38	
Assessor Details Mr. Jake Eaton, Jake	e Eaton, Tel: 01400283	471, jake@aerate	ch.co.uk	Assessor ID	P711-0001
Client Countryside Proper	ties , CPPLC				
SUMARY FOR INPUT DATA FOR New Bui	ld (As Designed)				
Criterion 1 – Achieving the TER and TFEE	rate				
1a TER and DER					
Fuel for main heating	Mains	eas			
Fuel factor		ains gas)			
Target Carbon Dioxide Emission Rate				kgCO <sub>2</sub> /m <sup>2</sup>	
Dwelling Carbon Dioxide Emission Rat	te (DER) 17.09			kgCO <sub>2</sub> /m <sup>2</sup>	Pass
	-1.80 (-9	9.5%)		kgCO <sub>2</sub> /m <sup>2</sup>	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)	63.14			kWh/m²/yr	
Dwelling Fabric Energy Efficiency (DFE	EE) 56.59			kWh/m²/yr	
	-6.5 (-10	0.3%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility					
Limiting Fabric Standards					
2 Fabric U-values					
Element	Average	Н	lighest		
External wall	0.23 (max. 0.30)	0	.23 (max. 0.7	0)	Pass
Party wall	0.00 (max. 0.20)	-			Pass
Floor	0.15 (max. 0.25)	0	.16 (max. 0.7	0)	Pass
Roof	0.11 (max. 0.20)	0	.18 (max. 0.3	5)	Pass
Openings	1.30 (max. 2.00)	1	.30 (max. 3.3	0)	Pass
2a Thermal bridging					
Thermal bridging calculated from	linear thermal transmit	ttances for each ju	nction		
3 Air permeability					
Air permeability at 50 pascals	4.00 (de	4.00 (design value)		m³/(h.m²) @ 50 Pa	
Maximum	10.0			m³/(h.m²) @ 50 P	a Pass
Limiting System Efficiencies					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



**4 Heating efficiency** 

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

## **BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)**



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Potterton ASSURE 36 COMBI Combi boiler Efficiency: 89.0% SEDBUK2009 Minimum: 88.0%	Pass	
Secondary heating system	None		
5 Cylinder insulation			
Hot water storage	No cylinder		
<u>6 Controls</u>			
Space heating controls	Time and temperature zone control	Pass	
Hot water controls	No cylinder		
Boiler interlock	Yes	Pass	
7 Low energy lights			
Percentage of fixed lights with low-energy fittings	100 %		
Minimum	75 %	Pass	
8 Mechanical ventilation			
Not applicable			
Criterion 3 – Limiting the effects of heat gains in su	mmer		
9 Summertime temperature			
Overheating risk (North East England)	Slight	Pass	
Based on:			
Overshading	Average		
Windows facing North East	7.47 m², No overhang		
Windows facing South East	2.01 m², No overhang		
Windows facing South West	9.18 m², No overhang		
Windows facing North West	1.35 m², No overhang	]	
Air change rate	2.50 ach		
Blinds/curtains	Light-coloured curtain or roller blind, closed 50% of daylight		
	hours		
Criterion 4 – Building performance consistent with	DER and DEEE rate		
Party Walls			
Туре	U-value		
	W/m²K	Pass	
Air permeability and pressure testing			
3 Air permeability	3// 2/ 0.00		
Air permeability at 50 pascals	4.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa		
Maximum	10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass	
10 Key features			
Party wall U-value	0.00 W/m²K		
Roof U-value	0.10 W/m <sup>2</sup> K		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16