PREDICTED ENERGY ASSESSMENT




Plot 076, 2 Bed, Dwelling type: Maisonette, Semi-Detached

K, B Date of assessment: 14/02/2020
Produced by: Silvio Junges
Total floor area: 69.36 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

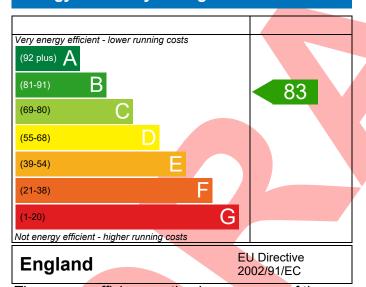

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

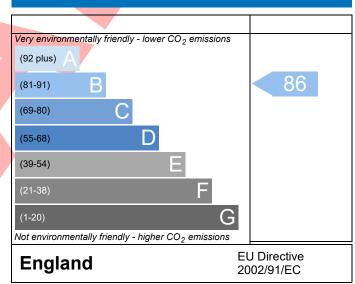

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference		0-076				Issued on Date	14/02/2020		
Assessment Reference	076			F	Prop Type Ref	K4 Semi FF Maisonett	e (As)		
Property	Plot 076, 2 Bed	К, В							
SAP Rating			83 B	DER	19.30	TER	20.06		
Environmental			86 B	% DER <ter< td=""><td></td><td>3.80</td><td></td></ter<>		3.80			
CO ₂ Emissions (t/year)			1.13	DFEE	52.33	TFEE	55.55		
General Requirements Compliance			Pass	% DFEE <tfee< td=""><td></td><td>5.79</td><td></td></tfee<>		5.79			
Assessor Details	Mr. Fraser Browning, Fraser Browning, Tel: 01884 242050, Assessor ID P637-0001								
	Fraser.browning@aessc.co.uk								
Client									
SUMARY FOR INPU	T DATA FOR New Bu	ild (As Desi	gned)						
Criterion 1 – Achiev	ring the TER and TFEI	rate							
1a TER and DER									
Fuel for main he	ating		Mains ga	is					
Fuel factor			1.00 (mains gas)						
Target Carbon Dioxide Emission Rate (TER)			20.06 kgCO ₂ /m ²						
Dwelling Carbon Dioxide Emission Rate (DER)			19.30 kgCO ₂ /m ²				Pass		
	-0.76 (-3.8%) kgCO ₂ /m ²								
1b TFEE and DFEE									
Target Fabric Energy Efficiency (TFEE)			55.55			kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DFEE)			52.33			kWh/m²/yr			
			-3.2 (-5.8	3%)		kWh/m²/yr	Pass		
Criterion 2 – Limits	on design flexibility								
Limiting Fabric S	Standards								
2 Fabric U-value	<u>es</u>								
Element		Avera	ge		Highest				
External v	wall	0.27 (max. 0.30)		0.27 (max. 0.7	0)	Pass		
Party wal		0.00 (max. 0.20)		-		Pass		
Floor		0.14 (max. 0.25)	1	0.14 (max. 0.7	0)	Pass		
Roof		0.10 (max. 0.20)			0.10 (max. 0.3	Pass			
Openings		1.40 ((max. 2.00) 1.40 (max. 3.			0)	Pass		
2a Thermal brid	ging								
Thermal brid	ging calculated from	linear ther	mal transmitt	ances for each j	unction				
3 Air permeabili	ity								
Air permeability at 50 pascals			5.00 (des	sign value)		m³/(h.m²) @ 50 Pa			
Maximum			10.0		m³/(h.m²) @ 50 Pa	Pass			
Limiting System	Efficiencies								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Sacandary heating system		_
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sum	nmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing East	0.72 m², No overhang	
Windows facing South East	2.22 m², No overhang	
Windows facing West	2.83 m², No overhang	
Windows facing North West	2.81 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with D	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.00 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.10 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 83	B 86	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

