
#### PREDICTED ENERGY ASSESSMENT



Plot 085, 2 bed, K, B Dwelling type: Date of assessment: Produced by: Total floor area: Flat, Detached 14/02/2020 Kieran Davies 70.73 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

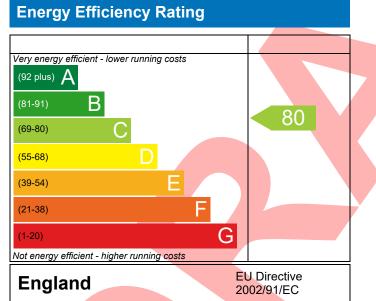

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

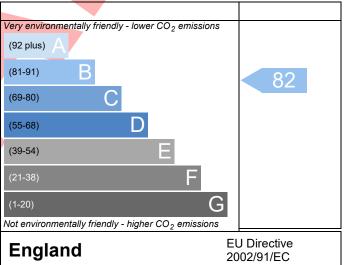

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Reference									
Property	Plot 085, 2 bed, K, B								
SAP Rating		8	80 C	DER	23.0	65	TER	24.28	
Environmental		8	32 B	% DER <ter< td=""><td></td><td></td><td>2.58</td><td></td></ter<>			2.58		
CO <sub>2</sub> Emissions (t/year)		1	.45	DFEE	76.3	36	TFEE	79.31	
General Requirements	Compliance	P	ass	% DFEE <tfe< td=""><td></td><td></td><td>3.72</td><td></td></tfe<>			3.72		
	r. Fraser Browning, Fras aser.browning@aessc.c		ing, Tel:	01884 242050	,		Assessor ID	T716-0003	
Client									
UMARY FOR INPUT DA	ATA FOR New Build (As	Designed	)						
riterion 1 – Achieving	the TER and TFEE rate								
a TER and DER									
Fuel for main heatin	g	Γ	Mains ga	s					
Fuel factor	-	1	L.00 (ma	ins gas)					
Target Carbon Dioxi	de Emission Rate (TER)	2	24.28				kgCO <sub>2</sub> /m <sup>2</sup>		
Dwelling Carbon Dio	xide Emission Rate (DE	R) 2	23.65				kgCO <sub>2</sub> /m <sup>2</sup>	Pass	
		-	0.63 (-2.	.6%)			kgCO <sub>2</sub> /m <sup>2</sup>		
b TFEE and DFEE		_					_		
Target Fabric Energy Efficiency (TFEE)			79.31				kWh/m²/yr		
Dwelling Fabric Ener	gy Efficiency (DFEE)		76.36	10/)			kWh/m²/yr	Dees	
riterion 2 – Limits on o	locian flovibility	Ŀ	2.9 (-3.7	70)			kWh/m²/yr	Pass	
Limiting Fabric Stan		_		<b>,</b>					
	uarus								
<u>2 Fabric U-values</u> Element		Varage			Highost				
External wall		verage .26 (max.	0 30)		Highest 0.27 (max.	0 70)		Pass	
Party wall		.00 (max.			-	0.70)		Pass	
Floor		.19 (max.)			0.19 (max.	0.70)		Pass	
Roof		.10 (max.	,		0.10 (max.			Pass	
Openings		.49 (max. 1			2.00 (max.	,		Pass	
2a Thermal bridging									
Thermal bridging	calculated from linear	thermal t	ransmitt	ances for each	junction				
<u>3 Air permeability</u>									
Air permeability	at 50 pascals	5	5.00 (design value)				m³/(h.m²) @ 50 Pa		
Maximum		1	L0.0			m³	/(h.m²) @ 50 Pa	Pass	
Limiting System Effi									

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02

## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 30 Combi boiler	Pass
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None	
<u>5 Cylinder insulation</u>		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in sum	nmer	
<u>9 Summertime temperature</u>		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing South East	6.16 m <sup>2</sup> , No overhang	
Windows facing South West Windows facing North West	1.34 m <sup>2</sup> , No overhang 3.18 m <sup>2</sup> , No overhang	
Air change rate	8.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with D		
Party Walls		
	U-value	
. 160	W/m²K	Pass
Air permeability and pressure testing		
<u>3 Air permeability</u>		
Air permeability at 50 pascals	5.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.10 W/m²K	


This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02

### RECOMMENDATIONS



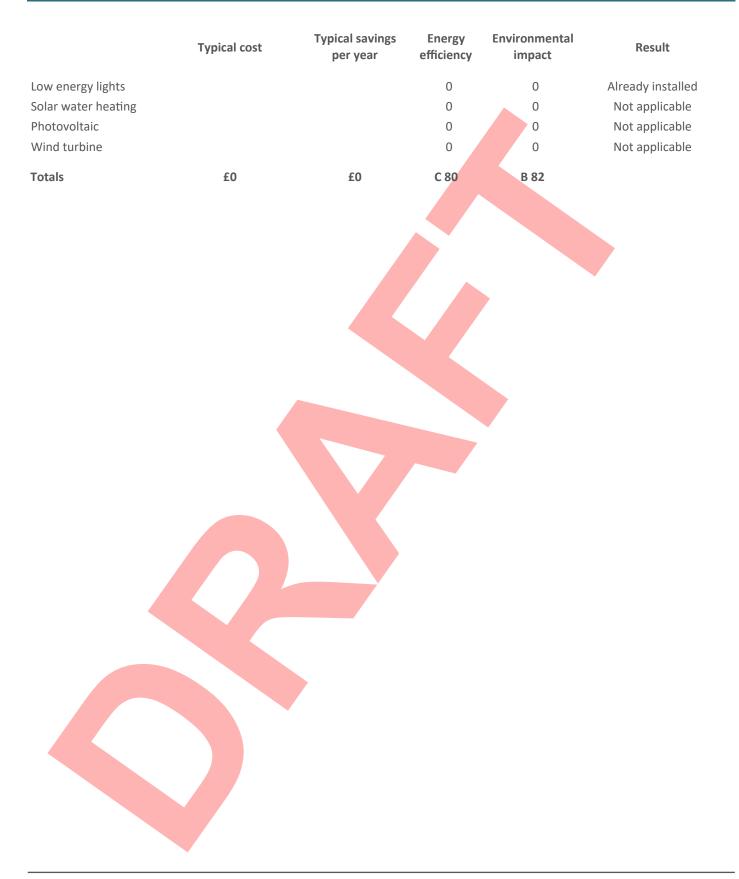

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

