PREDICTED ENERGY ASSESSMENT




249, 3 Bed, K. WC. B. ES Dwelling type: House, Semi-Detached

Date of assessment: 08/04/2022
Produced by: Toby Cottrell
Total floor area: 86.66 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

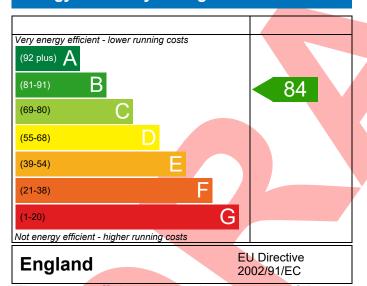

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

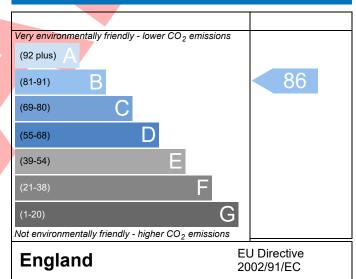

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



| Property Reference | e 4907-0026-5540-2 | 149 | | | | Issued on Date | 08/04/2022 | | |
|--|-----------------------------|--------------------------------------|---|--|----------------|---|------------|--|--|
| Assessment | 249 | 249 Prop Type Ref S3 Evesham Semi Op | | | | | | | |
| Reference | 240, 2 P 1 K 14/C | D. EC | | | | | | | |
| Property | 249, 3 Bed, K, WC, | B, ES | | | | | | | |
| SAP Rating | | | 84 B | DER | 17.66 | TER | 18.05 | | |
| Environmental | | | 86 B | % DER <ter< td=""><td></td><td>2.14</td><td></td></ter<> | | 2.14 | | | |
| CO₂ Emissions (t/year) | | | 1.34 | DFEE | 45.36 | TFEE | 51.31 | | |
| General Requirem | ents Compliance | | Pass | % DFEE <tfee< td=""><td></td><td>11.60</td><td></td></tfee<> | | 11.60 | | | |
| Assessor Details | Mr. Toby Cottrell, Tob | | Tel: 07376 | 335 441, | | Assessor ID | Q917-0001 | | |
| ol: . | toby.cottrell@aessc.co | o.uk | | | | | | | |
| Client | | | | | | | | | |
| | T DATA FOR New Build | | ned) | | | | | | |
| riterion 1 – Achiev | ving the TER and TFEE ra | ite | | | | | | | |
| la TER and DER | | | | | | | | | |
| Fuel for main he | eating | | Mains ga | as | | | | | |
| Fuel factor | | | 1.00 (mains gas) | | | | | | |
| Target Carbon Dioxide Emission Rate (TER) | | | 18.05 kgCO ₂ /m | | | | | | |
| Dwelling Carbon Dioxide Emission Rate (DER) | | | 17.66 kgCO ₂ /m ² | | | | Pass | | |
| h TEEE and DEEE | | | -0.39 (-2 | .2%) | | kgCO ₂ /m ² | | | |
| Lb TFEE and DFEE | orgy Efficiency (TEEE) | | 51.31 | | | kWh/m²/yr | | | |
| Target Fabric Energy Efficiency (TFEE) Dwelling Fabric Energy Efficiency (DFEE) | | | 45.36 | | 7 | kWh/m²/yr | | | |
| Dwelling rabite | Literary Efficiency (DI LL) | | -5.9 (-11 | 5%) | <u>/</u> | kWh/m²/yr | Pass | | |
| Criterion 2 – Limits | on design flexibility | | 3.5 (11 | .570 | | | 1 433 | | |
| Limiting Fabric S | | | | _ | | | | | |
| 2 Fabric U-value | | | | | | | | | |
| Element | <u></u> | Average | | | Highest | | | | |
| External | wall | 0.24 (ma | | | 0.24 (max. 0.7 | (0) | Pass | | |
| Party wal | | 0.00 (ma | | | - (max. 0.7 | 0) | Pass | | |
| Floor | | 0.13 (ma | | | 0.13 (max. 0.7 | (0) | Pass | | |
| Roof | | , | (max. 0.20) 0.11 (max | | | • | Pass | | |
| Openings | | | (max. 2.00) 1.40 (max. 3. | | | • | Pass | | |
| 2a Thermal brid | ging | | | | | | | | |
| Thermal brid | lging calculated from lin | ear therm | al transmitt | ances for each j | unction | | | | |
| 3 Air permeabili | | | | • | | | | | |
| Air permeability at 50 pascals | | | 5.01 (de: | sign value) | | m ³ /(h.m ²) @ 50 Pa | | | |
| Maximum | | | 10.0 | | | m³/(h.m²) @ 50 Pa Pass | | | |
| Limiting System | Efficiencies | | | | | | <u>'</u> | | |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



| Main heating system | Boiler system with radiators or underfloor - Mains gas | Pass |
|---|---|-----------|
| | Data from database | |
| | Potterton ASSURE 36 COMBI | |
| | Combi boiler | |
| | Efficiency: 89.0% SEDBUK2009 | |
| | Minimum: 88.0% | _ |
| Secondary heating system | None | |
| 5 Cylinder insulation | | |
| Hot water storage | No cylinder | |
| <u>6 Controls</u> | | |
| Space heating controls | Programmer, room thermostat and TRVs | Pass |
| Hot water controls | No cylinder | |
| Boiler interlock | Yes | Pass |
| 7 Low energy lights | | |
| Percentage of fixed lights with low-energy | 100 % | |
| fittings | | |
| Minimum | 75 % | Pass |
| 8 Mechanical ventilation | | |
| Not applicable | | |
| Criterion 3 – Limiting the effects of heat gains in sur | mmer | |
| 9 Summertime temperature | | |
| Overheating risk (Midlands) | Not significant | Pass |
| Based on: | | |
| Overshading | Average | |
| Windows facing East | 7.66 m², No overhang | \exists |
| Windows facing West | 3.84 m², No overhang | |
| Air change rate | 4.00 ach | = |
| Blinds/curtains | None | Ħ |
| Criterion 4 – Building performance consistent with | DER and DFEE rate | |
| Party Walls | | |
| Туре | U-value | |
| Filled Cavity with Edge Sealing | 0.00 W/m²K | Pass |
| Air permeability and pressure testing | | |
| 3 Air permeability | | |
| Air permeability at 50 pascals | 5.01 (design value) m ³ /(h.m ²) @ 50 Pa | |
| Maximum | 10.0 m ³ /(h.m ²) @ 50 Pa | Pass |
| 10 Key features | | |
| Party wall U-value | 0.00 W/m²K | |
| Roof U-value | 0.11 W/m²K | |
| NOO! O Value | VV/III K | |
| | | |
| | | |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



RECOMMENDATIONS



| | Typical cost | Typical savings per year | Energy efficiency | Environmental impact | Result |
|---------------------|------------------|-----------------------------|----------------------|----------------------|-------------------|
| Low energy lights | | | 0 | 0 | Already installed |
| Solar water heating | £4,000 - £6,000 | £27 | B 85 | B 88 | Recommended |
| Photovoltaic | £3,500 - £5,500 | £363 | A 95 | A 97 | Recommended |
| Wind turbine | | | 0 | 0 | Not applicable |
| Totals | £7,500 - £11,500 | £390 | A 95 | A 97 | |



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

