PREDICTED ENERGY ASSESSMENT




L203, 3 Bed, K. WC. B. ES Dwelling type: House, Semi-Detached

Date of assessment: 12/01/2023
Produced by: Silvio Junges
Total floor area: 80.36 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

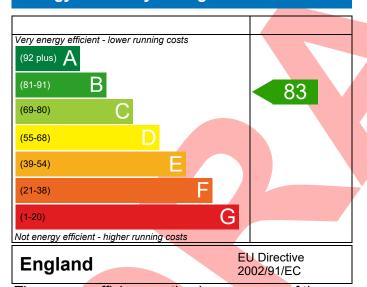

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

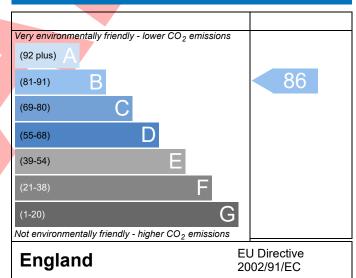

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



D	4007 B637 6406 13	02				42/04/2022		
Property Reference		03			sued on Date	12/01/2023		
Assessment Reference	L203 Prop Type Ref Eveleigh Semi OPP							
Property	L203, 3 Bed, K, WC,	B, ES						
SAP Rating		83 B	DER	18.25	TER	18.46		
Environmental		86 B	% DER <ter< td=""><td></td><td>1.15</td><td></td></ter<>		1.15			
CO ₂ Emissions (t/year)		1.21	DFEE	46.76	TFEE	51.75		
General Requireme	ents Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.64</td><td></td></tfee<>		9.64			
Assessor Details	Assessor ID	P637-0001						
	maja.stanisz@aessc.co	.uk						
Client								
SUMARY FOR INPU	T DATA FOR New Build (As Designed)						
Criterion 1 – Achiev	ing the TER and TFEE rat	e						
1a TER and DER			7 1					
Fuel for main he	ating	Mains g	as					
Fuel factor		1.00 (ma	ains gas)					
Target Carbon D	ioxide Emission Rate (TEI	R) 18.46	18.46 kgCO ₂ /m ²					
Dwelling Carbon	Dioxide Emission Rate ([DER) 18.25	18.25 kgCO ₂ /m ²					
		-0.21 (-1	1%)		kgCO ₂ /m ²			
1b TFEE and DFEE								
_	ergy Efficiency (TFEE)	51.75			kWh/m²/yr			
Dwelling Fabric I	Energy Efficiency (DFEE)	46.76		kWh/m²/yr				
		-5.0 (-9.	7%)		kWh/m²/yr	Pass		
	on design flexibility							
Limiting Fabric S								
2 Fabric U-value	25							
Element		Average		ighest				
External v		0.25 (max. 0.30)	0.	25 (max. 0.70)		Pass		
Party wal		0.00 (max. 0.20)	-			Pass		
Floor		0.18 (max. 0.25)		18 (max. 0.70)		Pass		
Roof		0.17 (max. 0.20)		17 (max. 0.35)	Pass Pass			
Openings		1.33 (max. 2.00)	x. 2.00) 1.40 (max. 3.30)					
2a Thermal brid								
	lging calculated from line	ar thermal transmit	tances for each jur	nction				
3 Air permeabili					2.4			
	ility at 50 pasc <mark>als</mark>		sign value)		m³/(h.m²) @ 50 Pa			
Maximum		10.0		m	³ /(h.m²) @ 50 Pa	Pass		
Limiting System	Efficiencies							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Canadam hastina matan		
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Thames Valley)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing South East	4.53 m², No overhang	
Windows facing North West	6.99 m², No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m³/(h.m²) @ 50 P	а
Maximum	10.0 m³/(h.m²) @ 50 P	a Pass
10 Key features		
Party wall U-value	0.00 W/m ² K	
Door U-value	0.90 W/m²K	
Window U-value	0.90 W/m²K	
Thermal bridging y-value	0.036 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£26	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£373	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£398	A 95	A 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

