#### PREDICTED ENERGY ASSESSMENT




Plot 22, 3 Bed, K,WC,B,ES Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 30/03/2023 Henry Knight 9**3.4**2 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

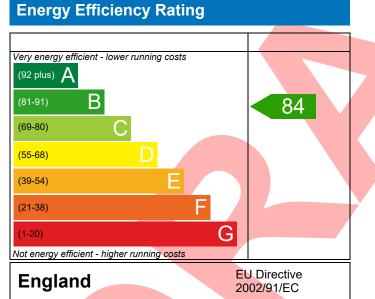

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

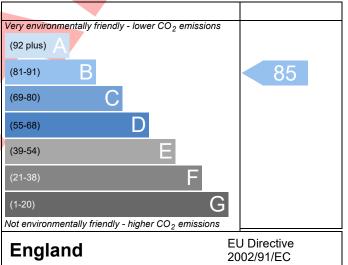

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property Reference		4907-U528-5247-022 Issued on Date 30,							
Assessment Reference	022	022 Prop Type Ref 3B5P Block 11 (AS)							
Property	Plot 22, 3 Bed, K,V	VC B FS							
	FIOT 22, 5 Bed, R, V	VC,D,L3		1					
SAP Rating			84 B	DER	18.08	TER	18.11		
Environmental	<b>`</b>		85 B	% DER <ter 0.18<="" td=""><td></td></ter>					
CO₂ Emissions (t/year)			1.34	DFEE	50.17	TFEE	55.87		
General Requirements Compliance			Pass	% DFEE <tfee< td=""><td></td><td>10.20</td><td></td></tfee<>		10.20			
	Mr. Silvio Junges, Silvi silvio.junges@aessc.c	-	ges, Tel: 01884 242050, Assessor ID U528-0001						
Client	VISTRY GROUP, Partn	erhsips							
SUMARY FOR INPUT I	DATA FOR New Build	(As Desig	ned)						
Criterion 1 – Achievin	g the TER and TFEE ra	ate							
La TER and DER									
Fuel for main heat	ing		Mains ga	as					
Fuel factor	-		1.00 (ma						
Target Carbon Dioxide Emission Rate (TER)			18.11 kgC						
Dwelling Carbon Dioxide Emission Rate (DER)			18.08			kgCO <sub>2</sub> /m <sup>2</sup>	Pass		
			-0.03 (-0	.2%)		kgCO <sub>2</sub> /m <sup>2</sup>			
<u>b TFEE and DFEE</u>									
Target Fabric Energy Efficiency (TFEE)			55.87		kWh/m²/yr				
Dwelling Fabric En	ergy Efficiency (DFEE)		50.17			kWh/m²/yr			
			-5.7 (-10	.2%)		kWh/m²/yr	Pass		
Criterion 2 – Limits or				-					
Limiting Fabric Sta	indards								
2 Fabric U-values									
Element		Averag	e		Highest				
External wa	ill		(max. 0.30) 0.22 (max.		0.22 (max. 0.70	D)	Pass		
Party wall			(max. 0.20) -			Pass			
Floor			(max. 0.25) 0.10 (max. 0.70)				Pass		
Roof			(max. 0.20) 0.11 (max. 0				Pass		
Openings 1.35 (ma			nax. 2.00)		1.40 (max. 3.30	D)	Pass		
2a Thermal bridging									
_	ng calculated from lin	ear therm	nal transmit	tances for each j	unction				
<u>3 Air permeability</u>									
Air normoobilit	y at 50 pascals		5.01 (design value) 10.0			m³/(h.m²) @ 50 Pa			
Air permeabilit	Maximum				m³/(h.m²) @ 50 Pa Pass				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%			
Secondary heating system	None	]		
5 Cylinder insulation		-		
Hot water storage	No cylinder			
6 Controls		_		
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
riterion 3 – Limiting the effects of heat gains in su	mmer			
Summertime temperature				
Overheating risk (Thames Valley)	Not significant	Pass		
ased on:				
Overshading	Average			
Windows facing North East	8.94 m <sup>2</sup> , No overhang	]		
Windows facing North East Windows facing South East	8.94 m², No overhang 2.16 m², No overhang	]		
Windows facing North East Windows facing South East Windows facing South West	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang			
Windows facing North East Windows facing South East Windows facing South West Air change rate	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None DER and DFEE rate			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None DER and DFEE rate U-value	] ] ]		
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None DER and DFEE rate	_ _ _ _ Pass		
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None DER and DFEE rate U-value	_ _ _ _ Pass		
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None DER and DFEE rate U-value 0.00 W/m <sup>2</sup> K	_ _ _ Pass		
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	8.94 m², No overhang   2.16 m², No overhang   10,00 m², No overhang   8.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50 Pa			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains <b>Titerion 4 – Building performance consistent with</b> <b>Party Walls</b> <b>Type</b> Filled Cavity with Edge Sealing Air permeability and pressure testing <u>3 Air permeability</u> Air permeability at 50 pascals Maximum	8.94 m <sup>2</sup> , No overhang 2.16 m <sup>2</sup> , No overhang 10.00 m <sup>2</sup> , No overhang 8.00 ach None DER and DFEE rate U-value 0.00 W/m <sup>2</sup> K			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains Titerion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum D Key features	8.94 m², No overhang   2.16 m², No overhang   10,00 m², No overhang   8.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50 Pa   10.0 m³/(h.m²) @ 50 Pa			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum D Key features Party wall U-value	8.94 m², No overhang   2.16 m², No overhang   10.00 m², No overhang   8.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50 Pa   10.0 m³/(h.m²) @ 50 Pa   0.00 W/m²K			
Windows facing North East Windows facing South East Windows facing South West Air change rate Blinds/curtains riterion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum O Key features	8.94 m², No overhang   2.16 m², No overhang   10,00 m², No overhang   8.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.01 (design value) m³/(h.m²) @ 50 Pa   10.0 m³/(h.m²) @ 50 Pa	Pass		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

### RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£78	B 85	B 87	Recommended
Photovoltaic	£3,500 - £5,500	£672	A 95	A 96	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£750	A 95	A 96	
Totals	17,500 - 111,500	1/50	A JJ	A 30	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

