#### PREDICTED ENERGY ASSESSMENT




Plot 421, 2 Bed, K+WC+B Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 22/09/2020 Mitchell Bennellick 79.94 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

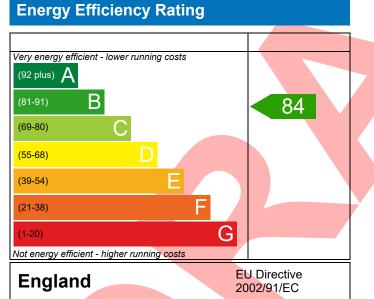

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

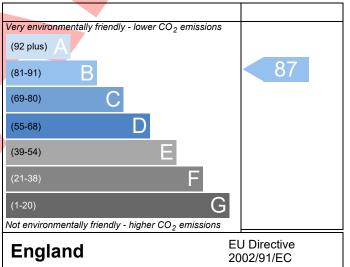

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Assessment Reference Property	Plot 421						
			Prop Type Ref HT D Semi (OP)				
Property							
	Plot 421, 2 Bed, K+WC+E	3					
SAP Rating		84 B	DER	16.42	TER	19.20	
Environmental		87 B	% DER <ter< td=""><td colspan="2">14.50</td><td></td></ter<>	14.50			
CO <sub>2</sub> Emissions (t/year)		1.13	DFEE	42.86	54.49		
General Requirements Compliance		Pass	% DFEE <tfee< td=""><td colspan="3">E<tfee 21.35<="" td=""></tfee></td></tfee<>	E <tfee 21.35<="" td=""></tfee>			
	. Kieran Davies, Kieran Da ran.davies@aessc.co.uk	avies , Tel: 0188	4 242050,		Assessor ID	P635-0001	
Client							
UMARY FOR INPUT DA	TA FOR New Build (As De	esigned)					
Criterion 1 – Achieving t	he TER and TFEE rate						
la TER and DER							
Fuel for main heating	J	Mains ga	IS				
Fuel factor	-	1.00 (ma					
Target Carbon Dioxid	19.20						
Dwelling Carbon Dioxide Emission Rate (DER)		16.42			kgCO <sub>2</sub> /m <sup>2</sup>	Pass	
		-2.78 (-1	4.5%)		kgCO₂/m²		
Lb TFEE and DFEE							
Target Fabric Energy		54.49 kWh/m²/yr					
Dwelling Fabric Energ	gy Efficiency (DFEE)	42.86			kWh/m²/yr		
		-11.6 (-2	1.3%)		kWh/m²/yr	Pass	
Criterion 2 – Limits on d			-				
Limiting Fabric Stand	lards						
2 Fabric U-values							
Element		rage		lighest			
External wall		(max. 0.30)	C	).18 (max. 0.70	)	Pass	
Party wall Floor		(max. 0.20) (max. 0.25)				Pass	
Roof		(max. 0.25) . (max. 0.20)				Pass Pass	
Openings		' (max. 2.00)				Pass	
2a Thermal bridging		,	-		,		
	calculated from linear the	ermal transmitt	ances for each iu	inction			
<u>3 Air permeability</u>							
Air permeability a	at 50 pascals 5.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa			a			
Maximum		10.0			m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa Pass		
Limiting System Effic	iencies				,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
4 Heating efficiency							
+ reating entitleity							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Potterton ASSURE 36 COMBI Combi boiler	Pass
	Efficiency: 89.0% SEDBUK2009 Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1900 0.1800	
Maximum	0.7	Pass
terion 3 – Limiting the effects of heat gains in su	ummer	
ummertime temperature		
Overheating risk (South East England)	Slight	Pass
sed on:		
seu on.		
Overshading	Average	
Overshading Windows facing North	7.02 m <sup>2</sup> , No overhang	
Overshading Windows facing North Windows facing East	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang	
Overshading Windows facing North Windows facing East Windows facing South	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang	
Overshading Windows facing North Windows facing East Windows facing South Air change rate	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach None	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach None	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate	Pass
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	7.02 m <sup>2</sup> , No overhang 0.46 m <sup>2</sup> , No overhang 3.46 m <sup>2</sup> , No overhang 4.00 ach None DER and DFEE rate	Pass
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	7.02 m², No overhang   0.46 m², No overhang   3.46 m², No overhang   4.00 ach   None   DER and DFEE rate   U-value   0.00   W/m²K	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	7.02 m², No overhang   0.46 m², No overhang   3.46 m², No overhang   4.00 ach   None   DER and DFEE rate   U-value   0.00 W/m²K   5.00 (design value) m³/(h.m²) @ 50	
Overshading Windows facing North Windows facing East Windows facing South Air change rate Blinds/curtains terion 4 – Building performance consistent with Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	7.02 m², No overhang   0.46 m², No overhang   3.46 m², No overhang   4.00 ach   None   DER and DFEE rate   U-value   0.00   W/m²K	 Pa

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



#### **10 Key features**

Party wall U-value	
Roof U-value	
Door U-value	
Door II-value	

Party wall U-value	0.00	W/m²K
Roof U-value	0.11	W/m²K
Door U-value	1.00	W/m²K
Door U-value	1.10	W/m²K

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



#### RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£30	B 85	B 89	Recommended
Photovoltaic	£5,000 - £8,000	£327	A 96	A 99	Recommended
Wind turbine			0	0	Not applicable
Totals	£9,000 - £14,000	£357	A 96	A 99	
Totals	19,000 - 114,000	L337	A 30	A 33	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

