


Masonry, Plot 091, 2 Bed, K, WC, B Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 08/06/2021 Silvio Junges 79.94 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

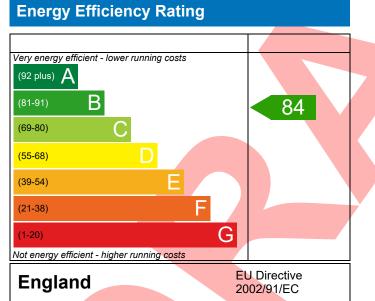

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

## Environmental Impact (CO<sub>2</sub>) Rating

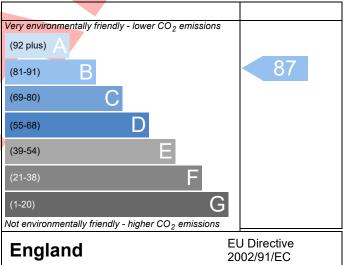

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property Masonry, Plot	: 091, 2 Bed, k	K, WC, B					
SAP Rating		84 B	DER	17.16	TER	19.08	
Environmental		87 B	% DER <ter< th=""><th></th><th>10.09</th><th></th></ter<>		10.09		
CO <sub>2</sub> Emissions (t/year)		1.18	DFEE	44.18	TFEE	53.14	
General Requirements Compliance		Pass	% DFEE <tfee< td=""><td colspan="3">% DFEE<tfee 16.85<="" td=""></tfee></td></tfee<>	% DFEE <tfee 16.85<="" td=""></tfee>			
Assessor Details Mr. Silvio Junges, silvio.junges@aes			242050,		Assessor ID	P637-0001	
Client							
UMARY FOR INPUT DATA FOR New B	uild (As Desi	gned)					
riterion 1 – Achieving the TER and TF	EE rate						
a TER and DER							
Fuel for main heating		Mains ga	is				
Fuel factor		1.00 (ma	iins gas)				
Target Carbon Dioxide Emission Rat	e (TER)	19.08			kgCO <sub>2</sub> /m <sup>2</sup>		
Dwelling Carbon Dioxide Emission Rate (DER)		17.16			kgCO <sub>2</sub> /m <sup>2</sup>	Pass	
		-1.92 (-1	0.1%)		kgCO <sub>2</sub> /m <sup>2</sup>		
b TFEE and DFEE							
Target Fabric Energy Efficiency (TFEE)		53.14			kWh/m²/yr		
Dwelling Fabric Energy Efficiency (D	FEE)	44.18			kWh/m²/yr		
		-8.9 (-16	.8%)		kWh/m²/yr	Pass	
riterion 2 – Limits on design flexibilit	У		-				
Limiting Fabric Standards							
2 Fabric U-values							
Element	Averag			Highest			
External wall		nax. 0.30)			))	Pass	
Party wall		nax. 0.20)		-		Pass Pass	
Floor		nax. 0.25)		0.12 (max. 0.70)			
Roof		(max. 0.20) 0.11 (max. 0.35)			Pass Pass		
Openings	1.28 (n	1.28 (max. 2.00) 1.40 (max. 3.30)					
2a Thermal bridging							
Thermal bridging calculated from	n linear therr	nal transmit	ances for each j	unction			
<u>3 Air permeability</u>							
Air permeability at 50 pascals		5.01 (design value)			m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa		
Maximum	T	10.0			m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database	Pass			
	Ideal LOGIC COMBI ESP1 35				
	Combi boiler				
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%				
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	No cylinder				
<u>6 Controls</u>					
Space heating controls	Time and temperature zone control	Pass			
Hot water controls	No cylinder				
Boiler interlock	Yes	Pass			
7 Low energy lights					
Percentage of fixed lights with low-energy fittings	100 %				
Minimum	75 %	Pass			
8 Mechanical ventilation					
Not applicable					
iterion 3 – Limiting the effects of heat gains in su	mmer				
Summertime temperature					
Overheating risk (East Anglia)	Slight	Pass			
ased on:					
Overshading	Average				
Windows facing South East	3.95 m <sup>2</sup> , No overhang				
Windows facing North West	3.53 m <sup>2</sup> , No overhang				
Air change rate	4.00 ach				
Blinds/curtains	None				
riterion 4 – Building performance consistent with	DER and DEEE rate				
Party Walls Type	U-value				
Filled Cavity with Edge Sealing	0.00 W/m <sup>2</sup> K	Pass			
Air permeability and pressure testing		1 435			
3 Air permeability					
Air permeability at 50 pascals	5.01 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	a			
Maximum	10.0 m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa				
Key features					
Party wall U-value	0.00 W/m²K				
Roof U-value	0.11 W/m²K				
Floor U-value	0.12 W/m <sup>2</sup> K				
Door U-value	0.82 W/m <sup>2</sup> K				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£29	B 85	B 89	Recommended
Photovoltaic	£5,000 - £8,000	£317	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£9,000 - £14,000	£346	A 96	A 98	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

