Building Regulations England Part L (BREL) Compliance Report

Approved Document L1 2021 Edition, England assessed by Array SAP 10 program, Array

Date: Fri 05 Jul 2024 08:16:46

Project Information						
Assessed By	Daniel Hilsdon	Building Type	House, Detached			
OCDEA Registration	EES/019793	Assessment Date	2024-07-05			

Dwelling Details						
Assessment Type	As designed	Total Floor Area	106 m ²			
Site Reference	Bexhill Plot 351	Bexhill Plot 351 Plot Reference pea SAGE				
Address	40 Plot 351 Kitty Hawk \	40 Plot 351 Kitty Hawk View, Bexhill, TN40 2QU				

Client Details	
Name	Countryside
Company	Countryside Partnerships (South)
Address	154 High Street, Kent, Sevenoaks, TN13 1XE

This report covers items included within the SAP calculations. It is not a complete report of regulations compliance.

1a Target emission rate and dwelling emission	rate				
Fuel for main heating system	Heat network				
Target carbon dioxide emission rate	10.43 kgCO ₂ /m ²				
Dwelling carbon dioxide emission rate	4.64 kgCO ₂ /m ²	OK			
1b Target primary energy rate and dwelling primary energy					
Target primary energy	54.49 kWh _{PE} /m ²				
Dwelling primary energy	48.55 kWh _{PE} /m ²	OK			
1c Target fabric energy efficiency and dwelling fabric energy efficiency					
Target fabric energy efficiency	38.2 kWh/m ²				
Dwelling fabric energy efficiency	35.1 kWh/m ²	OK			

2a Fabric U-values						
Element	Maximum permitted average U-Value [W/m²K]	Dwelling average U-Value [W/m²K]	Element with highest individual U-Value			
External walls	0.26	0.18	Walls (1) (0.18)	OK		
Party walls	0.2	N/A	N/A	N/A		
Curtain walls	1.6	N/A	N/A	N/A		
Floors	0.18	0.11	Ground Floor (0.11)	OK		
Roofs	0.16	0.09	Roof (1) (0.09)	OK		
Windows, doors,	1.6	1.3	Glazing - Rear (1.4)	OK		
and roof windows						
Rooflights	2.2	N/A	N/A	N/A		

2b Envelope elements (better than typically expected values are flagged with a subsequent (!))					
Name	Net area [m ²]	U-Value [W/m ² K]			
Exposed wall: Walls (1)	134.0864	0.18			
Ground floor: Ground Floor, Ground Floor	53.2	0.11			
Exposed roof: Roof (1)	53.2	0.09 (!)			

2c Openings (better than typically expected values are flagged with a subsequent (!))					
Name	Area [m ²]	Orientation	Frame factor	U-Value [W/m ² K]	
Door - Front, Front Door	2.121	North	N/A	1 (!)	
Glazing - Front, Windows / Glazed	2.2656	North	1.0	1.3	
Doors					
Glazing - Front, Windows / Glazed	1.536	North	1.0	1.3	
Doors					
Glazing - Front, Windows / Glazed	1.536	North	1.0	1.3	
Doors					
Glazing - Rear, Windows / Glazed	1.536	South	1.0	1.3	
Doors					
Glazing - Rear, Windows / Glazed	1.536	South	1.0	1.3	
Doors					
Glazing - Rear, Patio Door	6.153	South	1.0	1.4	

			ted values are flagged with a subs		
		bridging ca	alculated from linear thermal transmit		
Main element	Junction detail		Source	Psi value [W/mK]	Drawing / reference
External wall	E2: Other lintels (including other steel lintels)		Calculated by person with suitable expertise		AES custom ps
External wall	E3: Sill		Calculated by person with suitable	0.025 (!)	AES custom ps
External wall	E4: Jamb		expertise Calculated by person with suitable	0.019 (!)	values AES custom ps
External wall	E5: Ground floor (norma	al)	expertise Calculated by person with suitable	0.06	values AES custom ps
External wall	`	<u> </u>	expertise		values
	E6: Intermediate floor w dwelling		Calculated by person with suitable expertise		AES custom ps values
External wall	E10: Eaves (insulation a level)	it ceiling	Calculated by person with suitable expertise	0.065	AES custom ps values
External wall	E12: Gable (insulation a level)	t ceiling	Calculated by person with suitable expertise	0.04	AES custom ps
External wall	E16: Corner (normal)		Calculated by person with suitable	0.036 (!)	AES custom ps
			expertise		values
			values are flagged with a subsequ	uent (!))	
	nitted air permeability at 50	₽a	8 m ³ /hm ²		OK
	rmeability at 50Pa / test certificate reference		5.01 m ³ /hm ² , Design value		OK
4 Space heatir	na				
	system 1: Heat network - H	leat netwo	ork		
Efficiency					
Emitter type					
Flow temperatu	ıre				
System type					
Manufacturer					
Model					
Commissioning	ating system: N/A				
Fuel		N/A			
Efficiency		N/A N/A			
Commissioning		IN/A			
5 Hot water					
Cylinder/store					
Capacity		N/A			
Declared heat I		N/A			
Primary pipewo	ork insulated	N/A			
Manufacturer					
Model					
Commissioning Waste water h	eat recovery system 1 - ty	/ne· N/Δ			
Efficiency	Jac 1000 for y System 1 - t	7 PO. 14/7			
Manufacturer					
Model					
6 Controls					
	I - type: Flat rate charging,	programm	ner, and TRVs		
Function	_				
Ecodesign clas	S				
Manufacturer Model					
	- type: Cylinder thermostat	and LIM.	sanarataly timod		
Manufacturer	- type. Cylinder thermostat	anu mw s	separately tillieu		
Model		шп і			

HIU

Model

7 Lighting						
Minimum permitted light source efficacy	75 lm/W					
Lowest light source efficacy	81 lm/W	OK				
External lights control	N/A					
8 Mechanical ventilation						
System type: Decentralised mechanical	extract					
Maximum permitted specific fan power	0.7 W/(I/s)					
Specific fan power	0.16 W/(I/s)		ОК			
Minimum permitted heat recovery	N/A		OK			
efficiency	INA					
Heat recovery efficiency	N/A		N/A			
Manufacturer/Model	Lo-Carbon NBR dM	EV.C 100, 408005	IVA			
Commissioning	LO-Carbon NDIX divi	L V C 100, 498093				
9 Local generation						
N/A						
10 Heat networks						
Network name: Bexhill District Heat Net	work (GTC)					
Service provision	work (CTO)	Space and water heating				
Status New heat network						
Carbon dioxide emission factor for delive	red heat	0.058 kgCO ₂ /kWh				
Primary energy factor for delivered heat		0.608 kWh _{PF} /kWh				
11 Supporting documentary evidence						
N/A						
12 Declarations						
a. Assessor Declaration						
	onfirmation that the co	ontents of this BREL Compliance Report				
		nformation submitted for this dwelling for				
	the purpose of carrying out the "As designed" assessment, and that the supporting documentary					
evidence (SAP Conventions, Append						
documentary evidence required) has been reviewed in the course of preparing this BREL						
Compliance Report.		3				
1 22 22 21 2						
Signed:		Assessor ID:				
Name:		Date:				

N/A

b. Client Declaration

Predicted Energy Assessment



Plot 351, 40, Kitty Hawk View, Bexhill, TN40 2QU

Dwelling type: House, Detached
Date of assessment: 05/07/2024
Produced by: Daniel Hilsdon
Total floor area: 106.4 m²
DRRN: 5428-5306-0042

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP 10 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO2) emissions.

Very energy efficient - lower running costs (92 plus) A


Energy Efficiency Rating

(81-91) B (69-80) C (55-68) D (39-54) E

England EU Directive 2002/91/EC

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

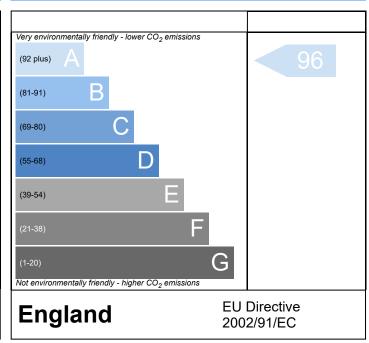

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

SAP 10 Online 2.13.6 Page 1 of 1