PREDICTED ENERGY ASSESSMENT




Plot 154, 2 Bed, Dwelling type: Flat, Semi-Detached

K+B Date of assessment: 22/09/2020
Produced by: Kieran Davies
Total floor area: 69.65 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

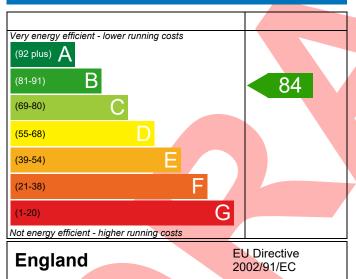

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

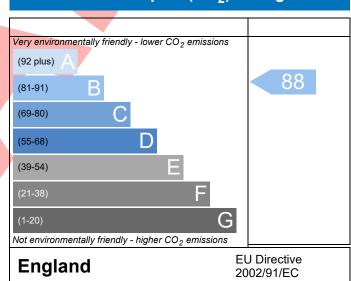

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	e 4907-0012-4592-1	54				Issued on Date	22/09/2020	
Assessment	Plot 154				Prop Type Ref	Flat Type 16 1F		
Reference Property	Plot 154, 2 Bed, K+	-R						
	1100 134, 2 Bed, K.		0.4.5	252	45.04		46.62	
SAP Rating			84 B	DER OF DER	15.91	TER	16.62	
Environmental CO. 5 : : (1/2)			88 B 0.97	% DER <ter< td=""><td>40.06</td><td>4.27 TFEE</td><td>40.39</td></ter<>	40.06	4.27 TFEE	40.39	
CO₂ Emissions (t/y			Pass	DFEE % DFEE <tfe< td=""><td></td><td>0.81</td><td>40.39</td></tfe<>		0.81	40.39	
	•							
Assessor Details	Mr. Kieran Davies, Kie Kieran.davies@aessc.d		, Tel: 0188	34 242050,		Assessor ID	T716-0001	
Client	South, Countryside NF							
			ad)					
	T DATA FOR New Build		eu)					
	ring the TER and TFEE ra	ite						
1a TER and DER			Da :				_	
Fuel for main heating			Mains gas					
Fuel factor	ioxide Emission Rate (TE	ΕD1	1.00 (mains gas)					
•	Dioxide Emission Rate (•	16.62 kgCO ₂ /m ² l5.91 kgCO ₂ /m ²				Pass	
Dwelling carbon	Dioxide Emission nate ((DLIV)	-0.71 (-4.3%) kgCO ₂ /m²					
1b TFEE and DFEE				1071		1.8002/11		
Target Fabric Energy Efficiency (TFEE)			40.39 kWh/m²/yr					
Dwelling Fabric Energy Efficiency (DFEE)			40.06 kWh/					
			-0.3 (-0.7	7%)		kWh/m²/yr	Pass	
Criterion 2 – Limits	on design flexibility							
Limiting Fabric S	Standards							
2 Fabric U-value	<u>es</u>							
Element		Average			Highest			
External	wall	0.18 (ma	x. 0.30)		0.18 (max. 0.7	70)	Pass	
Party wal		0.00 (ma	x. 0.20)		-		Pass	
Openings		1.24 (ma	(max. 2.00) 1.63 (max. 3.30)			Pass		
2a Thermal brid	ging							
Thermal brid	ging calculated from line	ear therma	l transmit	tances for each	junction			
3 Air permeabili	ity					_		
Air permeabi	ility at 50 pascals		5.00 (de	sign value)		m³/(h.m²) @ 50 Pa		
Maximum			10.0			m³/(h.m²) @ 50 Pa	Pass	
Limiting System	Efficiencies							
4 Heating efficie	ency							



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Potterton ASSURE 36 COMBI	
	Combi boiler	
	Efficiency: 89.0% SEDBUK2009	
	Minimum: 88.0%	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1900 0.1800	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in sum	nmer	
9 Summertime temperature		
Overheating risk (South East England)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	3.99 m², No overhang	
Windows facing East	4.38 m², No overhang	
Windows facing South	5.48 m ² , No overhang	
Windows facing South West	5.26 m², No overhang	
Air change rate	6.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with D	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.00 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02


BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



10 Key features

Party wall U-value Door U-value Door U-value

0.00	W/m²K
1.00	W/m²K
1.10	W/m²K

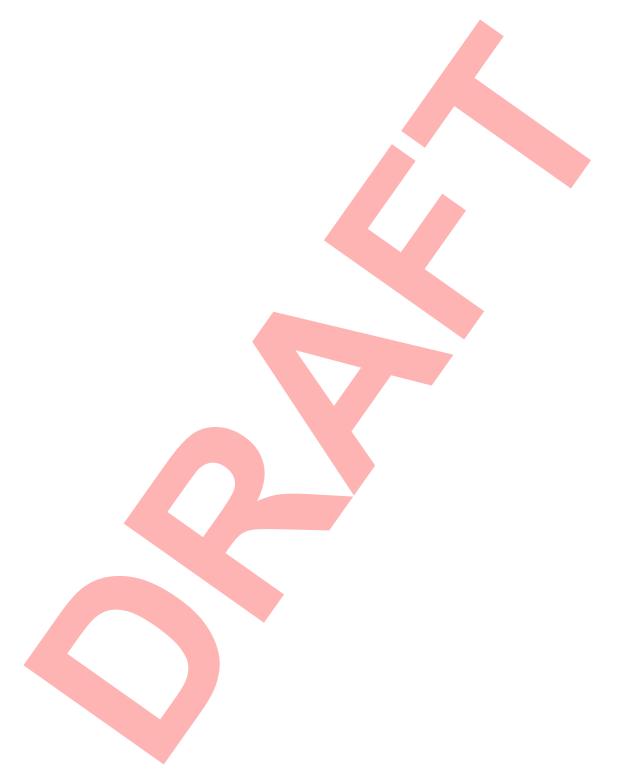



RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
Totals	£0	£0	B 84	B 88	



