PREDICTED ENERGY ASSESSMENT




Plot 089, 3 Bed, Dwelling type: House, Semi-Detached K. WC. B Date of assessment: 15/02/2022

Date of assessment: 15/02/2022
Produced by: Karim Meraga
Total floor area: 84.06 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

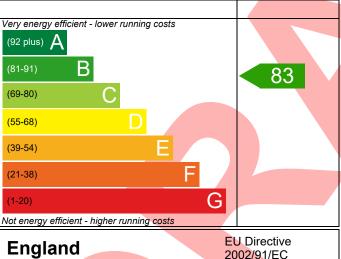

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

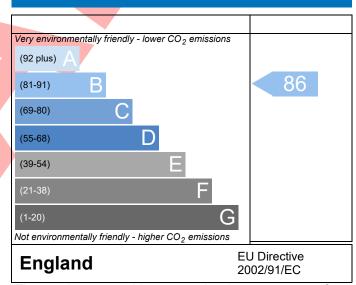

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference	4907-Q511-5238-	089			Issued on Date	15/02/2022		
Assessment	Plot 089	Plot 089 Prop Type Ref A32 Family - Semi - OP						
Reference	DI + 000 0 D 1 W							
Property	Plot 089, 3 Bed, K	, WC, B						
SAP Rating		83 B	DER	18.17	TER	18.52		
Environmental		86 B	% DER <ter< td=""><td></td><td>1.88</td><td></td></ter<>		1.88			
CO ₂ Emissions (t/year)		1.26	DFEE	47.09	TFEE	52.12		
General Requiremen	ts Compliance	Pass	% DFEE <tfee< td=""><td></td><td>9.65</td><td></td></tfee<>		9.65			
	silvio.junges@aessou	thern.co.uk						
Client	/istry Group							
UMARY FOR INPUT I	DATA FOR New Build	(As Designed)						
riterion 1 – Achievin	g the TER and TFEE r	ate						
a TER and DER								
Fuel for main heat	ing	Mains g	as					
Fuel factor		1.00 (ma	ains gas)					
Target Carbon Dio	xide Emission Rate (T	ER) 18.52	18.52 kgCO2/m2					
Dwelling Carbon D	ioxide Emission Rate	(DER) 18.17	$18.17 kgCO_2/m^2$					
_		-0.35 (-1	9%)		kgCO ₂ /m ²			
b TFEE and DFEE								
_	gy Efficiency (TFEE)	52.12			kWh/m²/yr			
Dwelling Fabric En	ergy Efficiency (DFEE		50/1		kWh/m²/yr			
		-5.0 (-9.	5%)		kWh/m²/yr	Pass		
riterion 2 – Limits or								
Limiting Fabric Sta	ndards							
2 Fabric U-values								
Element		Average		ighest				
External wa		0.25 (max. 0.30)	0.	25 (max. 0.70))	Pass		
Party wall		0.00 (max. 0.20)	-			Pass		
Floor		0.18 (max. 0.25)		18 (max. 0.70)	•	Pass		
Roof		0.17 (max. 0.20)						
Openings		1.30 (max. 2.00)	1.	40 (max. 3.30))	Pass		
2a Thermal bridgin			tanaaa faa					
		near thermal transmit	tances for each jur	าตาดท				
3 Air permeability		[=			2111 21			
1 12	v at 50 nascals	I5.01 (de	sign value)		m ³ /(h.m ²) @ 50 Pa m ³ /(h.m ²) @ 50 Pa Pass			
Air permeabilit Maximum	y at 50 pascais	10.0	,		, ,			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas	Pass
	Data from database	
	Ideal LOGIC COMBI ESP1 35	
	Combi boiler	
	Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	
Canadam hastina matam		=
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
<u>6 Controls</u>		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy	100 %	
fittings		
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (South West England)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North	4.12 m², No overhang	
Windows facing East	1.20 m ² , No overhang	
Windows facing South	3.66 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	ſ
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Door U-value	0.90 W/m²K	
Thermal bridging y-value	0.036 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£26	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£380	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£406	A 95	A 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19