

Building Regulations England Part L (BREL) Compliance Report

Approved Document L1 2021 Edition, England assessed by Array SAP 10 program, Array

Date: Mon 10 Jun 2024 09:25:51

Project Information			
Assessed By	Demi Beneke	Building Type	House, Semi-detached
OCDEA Registration	EES/027264	Assessment Date	2024-06-10

Dwelling Details			
Assessment Type	As designed	Total Floor Area	84 m ²
Site Reference	Plot 19	Plot Reference	Plot 19
Address			

Client Details			
Name	AJC		
Company	AJC		
Address	4 Joshuas Vista, Poole, BH14 8HA		

This report covers items included within the SAP calculations. It is not a complete report of regulations compliance.

1a Target emission rate and dwelling emission rate			
Fuel for main heating system	Electricity		
Target carbon dioxide emission rate	11.34 kgCO ₂ /m ²		
Dwelling carbon dioxide emission rate	4.02 kgCO ₂ /m ²	OK	
1b Target primary energy rate and dwelling primary energy			
Target primary energy	59.21 kWh _{PE} /m ²		
Dwelling primary energy	46.57 kWh _{PE} /m ²	OK	
1c Target fabric energy efficiency and dwelling fabric energy efficiency			
Target fabric energy efficiency	37.7 kWh/m ²		
Dwelling fabric energy efficiency	34.3 kWh/m ²	OK	

2a Fabric U-values				
Element	Maximum permitted average U-value [W/m ² K]	Dwelling average U-Value [W/m ² K]	Element with highest individual U-Value	
External walls	0.26	0.18	Walls (1) (0.18)	OK
Party walls	0.2	0	Party Wall (1) (0)	N/A
Curtain walls	1.6	0	N/A	N/A
Floors	0.18	0.12	Ground Floor (0.12)	OK
Roofs	0.16	0.11	Roof (1) (0.11)	OK
Windows, doors, and roof windows	1.6	1.29	W1 (1.3)	OK
Rooflights	2.2	N/A	N/A	N/A

2b Envelope elements (better than typically expected values are flagged with a subsequent (!))			
Name	Net area [m ²]	U-Value [W/m ² K]	
Exposed wall: Walls (1)	77.489545	0.18	
Party wall: Party Wall (1)	43.06	0 (!)	
Ground floor: Ground Floor, Ground Floor	42.07	0.12	
Exposed roof: Roof (1)	42.07	0.11	

2c Openings (better than typically expected values are flagged with a subsequent (!))				
Name	Area [m ²]	Orientation	Frame factor	U-Value [W/m ² K]
D1, Door	2.15853	South West	N/A	1.2
W1, Windows	0.2806	South West	1.0	1.3
W2, Windows	1.60368	South West	1.0	1.3
W4, Windows	4.2735	North East	1.0	1.3
W5, Windows	3.193225	South West	1.0	1.3
W6, Windows	0.7261	North West	1.0	1.3
W7, Windows	1.602395	North East	1.0	1.3
W8, Windows	0.880225	North East	1.0	1.3
W3, Windows	0.7261	North East	1.0	1.3
W9, Windows	0.7261	North West	1.0	1.3

2d Thermal bridging (better than typically expected values are flagged with a subsequent (!))			
Building part 1 - Main Dwelling: Thermal bridging calculated from linear thermal transmittances for each junction			

Main element	Junction detail	Source	Psi value [W/mK]	Drawing / reference
External wall	E2: Other lintels (including other steel lintels)	Calculated by person with suitable expertise	0.02 (!)	RCD
External wall	E3: Sill	Calculated by person with suitable expertise	0.023 (!)	RCD
External wall	E4: Jamb	Calculated by person with suitable expertise	0.018 (!)	RCD
External wall	E5: Ground floor (normal)	Calculated by person with suitable expertise	0.031 (!)	K
External wall	E6: Intermediate floor within a dwelling	Calculated by person with suitable expertise	0.001 (!)	RCD
External wall	E10: Eaves (insulation at ceiling level)	Calculated by person with suitable expertise	0.055	RCD
External wall	E12: Gable (insulation at ceiling level)	Calculated by person with suitable expertise	0.037 (!)	RCD
External wall	E16: Corner (normal)	Calculated by person with suitable expertise	0.04	RCD
External wall	E18: Party wall between dwellings	Calculated by person with suitable expertise	0.029 (!)	Knauf
Party wall	P1: Ground floor	Calculated by person with suitable expertise	0.043	RCD
Party wall	P2: Intermediate floor within a dwelling	SAP table default	0 (!)	
Party wall	P4: Roof (insulation at ceiling level)	Calculated by person with suitable expertise	0.033 (!)	RCD

3 Air permeability (better than typically expected values are flagged with a subsequent (!))

Maximum permitted air permeability at 50Pa	8 m ³ /hm ²	
Dwelling air permeability at 50Pa	5 m ³ /hm ² , Design value	OK
Air permeability test certificate reference		

4 Space heating

Main heating system 1: Room heaters - Electricity	
Efficiency	100.0%
Emitter type	
Flow temperature	
System type	Panel, convector or radiant heaters
Manufacturer	
Model	
Commissioning	
Main heating system 2: Heat pump with radiators or underfloor heating - Electricity	
Efficiency	0.0%
Emitter type	
Flow temperature	
System type	Heat Pump
Manufacturer	GDC Group Ltd
Model	EDL200UK-630
Commissioning	

Secondary heating system: N/A

Fuel	N/A
Efficiency	N/A
Commissioning	

5 Hot water

Cylinder/store - type: N/A	
Capacity	N/A
Declared heat loss	N/A
Primary pipework insulated	N/A
Manufacturer	
Model	
Commissioning	

Waste water heat recovery system 1 - type: N/A		
Efficiency		
Manufacturer		
Model		
6 Controls		
Main heating 1 - type: Programmer and appliance thermostats		
Function		
Ecodesign class		
Manufacturer		
Model		
Main heating 2 - type: Not applicable		
Function		
Ecodesign class		
Manufacturer		
Model		
Water heating - type: N/A		
Manufacturer		
Model		
7 Lighting		
Minimum permitted light source efficacy	75 lm/W	
Lowest light source efficacy	80 lm/W	OK
External lights control	N/A	
8 Mechanical ventilation		
System type: N/A		
Maximum permitted specific fan power	N/A	
Specific fan power	N/A	
Minimum permitted heat recovery efficiency	N/A	
Heat recovery efficiency	N/A	N/A
Manufacturer/Model		
Commissioning		
9 Local generation		
Technology type: Photovoltaic system (1)		
Peak power	1.75 kWp	
Orientation	South West	
Pitch	45°	
Overshading	None or very little	
Manufacturer		
MCS certificate		
10 Heat networks		
N/A		
11 Supporting documentary evidence		
N/A		
12 Declarations		
a. Assessor Declaration		
This declaration by the assessor is confirmation that the contents of this BREL Compliance Report are a true and accurate reflection based upon the design information submitted for this dwelling for the purpose of carrying out the "As designed" assessment, and that the supporting documentary evidence (SAP Conventions, Appendix 1 (documentary evidence) schedules the minimum documentary evidence required) has been reviewed in the course of preparing this BREL Compliance Report.		
Signed:	Assessor ID:	
Name:	Date:	
b. Client Declaration		
N/A		

Summary for Input Data



Property Reference	Plot 19	Issued on Date	10/06/2024			
Assessment Reference	Plot 19	Prop Type Ref				
Property						
SAP Rating	83 B	DER	4.02			
Environmental	97 A	% DER < TER				
CO ₂ Emissions (t/year)	0.22	DFEE	34.32			
Compliance Check	See BREL	% DFEE < TFEE				
% DPER < TPER	21.36	DPER	46.57			
Assessor Details	Ms. Demi Beneke	Assessor ID	AV37-0001			
Client						
SUMMARY FOR INPUT DATA FOR: New Build (As Designed)						
Orientation	Southwest					
Property Tenure	ND					
Transaction Type	6					
Terrain Type	Suburban					
1.0 Property Type	House, Semi-Detached					
Which Floor	0					
2.0 Number of Storeys	2					
3.0 Date Built	2024					
3.0 Property Age Band	L					
4.0 Sheltered Sides	1					
5.0 Sunlight/Shade	Average or unknown					
6.0 Thermal Mass Parameter	Precise calculation					
Thermal Mass	N/A kJ/m ² K					
7.0 Electricity Tariff	Standard					
Smart electricity meter fitted	Yes					
Smart gas meter fitted	Yes					
7.0 Measurements						
	Heat Loss Perimeter	Internal Floor Area	Average Storey Height			
Basement:	0.00 m	0.00 m ²	0.00 m			
Ground floor:	18.40 m	42.07 m ²	2.42 m			
1st Storey:	18.40 m	42.07 m ²	2.67 m			
2nd Storey:	0.00 m	0.00 m ²	0.00 m			
3rd Storey:	0.00 m	0.00 m ²	0.00 m			
4th Storey:	0.00 m	0.00 m ²	0.00 m			
5th Storey:	0.00 m	0.00 m ²	0.00 m			
6th Storey:	0.00 m	0.00 m ²	0.00 m			
7th Storey:	0.00 m	0.00 m ²	0.00 m			
8.0 Living Area	16.44 m ²					
9.0 External Walls						
Description	Type	Construction	U-Value (W/m ² K) Kappa (kJ/m ² K) Gross Area(m ²) Nett Area (m ²) Shelter Res	Shelter	Openings	Area Calculation Type
External Wall	Cavity Wall	Cavity wall : plasterboard on dabs, AAC block, filled cavity, any outside structure	0.18 60.00 93.66 77.49 0.00	None	16.17	Enter Gross Area
9.1 Party Walls						
Description	Type	Construction	U-Value (W/m ² K) Kappa (kJ/m ² K)	Area (m ²)	Shelter Res	Shelter
Party Wall	Filled Cavity with Edge Sealing	Single plasterboard on dabs on both sides, dense blocks, cavity or cavity fill	0.00 70.00	43.06	0.00	None
9.2 Internal Walls						
Description	Construction				Kappa (kJ/m ² K)	Area (m ²)
Internal Wall	Plasterboard on timber frame				9.00	164.69
10.0 External Roofs						
Description	Type	Construction	U-Value (W/m ² K) Kappa (kJ/m ² K)	Gross Area(m ²) Nett Area	Shelter Code Factor	Openings Calculation Type

Summary for Input Data

Plain Ceiling	External Plane Roof	Plasterboard, insulated at ceiling level	0.11	9.00	42.07	42.07 (m²)	None	0.00	Enter Gross Area	0.00																																																																														
10.2 Internal Ceilings																																																																																								
Description	Storey	Construction						Area (m²)																																																																																
Internal Ceiling 1	Lowest occupied	Plasterboard ceiling, carpeted chipboard floor						42.07																																																																																
11.0 Heat Loss Floors																																																																																								
Description	Type	Storey Index	Construction		U-Value (W/m ² K)		Shelter Code	Shelter Factor	Kappa (kJ/m ² K)	Area (m ²)																																																																														
Ground Floor	Ground Floor - Solid	Lowest occupied	Suspended concrete floor, carpeted	0.12			None	0.00	75.00	42.07																																																																														
11.2 Internal Floors																																																																																								
Description	Storey Index	Construction						Kappa (kJ/m²K)																																																																																
Internal Floor 1		Plasterboard ceiling, carpeted chipboard floor						9.00																																																																																
12.0 Opening Types																																																																																								
Description	Data Source	Type	Glazing	Glazing Gap	Filling Type	G-value	Frame Type	Frame Factor	U Value (W/m ² K)																																																																															
Door Windows	Manufacturer BFRC, BSI or CERTASS data	Solid Door Window	Double Low-E Soft 0.05		Air Filled	0.00	Wood	0.70	1.20	1.30																																																																														
0.45							Wood	1.00																																																																																
13.0 Openings																																																																																								
Name	Opening Type		Location	Orientation		Area (m ²)	Pitch																																																																																	
D1	Door		External Wall	South West		2.16	0																																																																																	
W1	Windows		External Wall	South West		0.28	0																																																																																	
W2	Windows		External Wall	South West		1.60	0																																																																																	
W4	Windows		External Wall	North East		4.27	0																																																																																	
W5	Windows		External Wall	South West		3.19	0																																																																																	
W6	Windows		External Wall	North West		0.73	0																																																																																	
W7	Windows		External Wall	North East		1.60	0																																																																																	
W8	Windows		External Wall	North East		0.88	0																																																																																	
W3	Windows		External Wall	North East		0.73	0																																																																																	
W9	Windows		External Wall	North West		0.73	0																																																																																	
14.0 Conservatory																																																																																								
None																																																																																								
15.0 Draught Proofing																																																																																								
100 %																																																																																								
16.0 Draught Lobby																																																																																								
No																																																																																								
17.0 Thermal Bridging																																																																																								
Calculate Bridges																																																																																								
17.1 List of Bridges																																																																																								
<table border="1"> <thead> <tr> <th>Bridge Type</th> <th>Source Type</th> <th>Length</th> <th>Psi</th> <th>Adjusted Reference:</th> <th>Imported</th> </tr> </thead> <tbody> <tr> <td>E2 Other lintels (including other steel lintels)</td> <td>Independently assessed</td> <td>11.24</td> <td>0.02</td> <td>0.02 RCD</td> <td>No</td> </tr> <tr> <td>E3 Sill</td> <td>Independently assessed</td> <td>8.18</td> <td>0.02</td> <td>0.02 RCD</td> <td>No</td> </tr> <tr> <td>E4 Jamb</td> <td>Independently assessed</td> <td>26.28</td> <td>0.02</td> <td>0.02 RCD</td> <td>No</td> </tr> <tr> <td>E5 Ground floor (normal)</td> <td>Independently assessed</td> <td>18.40</td> <td>0.03</td> <td>0.03 K</td> <td>No</td> </tr> <tr> <td>E6 Intermediate floor within a dwelling</td> <td>Independently assessed</td> <td>18.40</td> <td>0.00</td> <td>0.00 RCD</td> <td>No</td> </tr> <tr> <td>E10 Eaves (insulation at ceiling level)</td> <td>Independently assessed</td> <td>9.94</td> <td>0.06</td> <td>0.06 RCD</td> <td>No</td> </tr> <tr> <td>E12 Gable (insulation at ceiling level)</td> <td>Independently assessed</td> <td>8.46</td> <td>0.04</td> <td>0.04 RCD</td> <td>No</td> </tr> <tr> <td>E16 Corner (normal)</td> <td>Independently assessed</td> <td>10.18</td> <td>0.04</td> <td>0.04 RCD</td> <td>No</td> </tr> <tr> <td>E18 Party wall between dwellings</td> <td>Independently assessed</td> <td>10.18</td> <td>0.03</td> <td>0.03 Knauf</td> <td>No</td> </tr> <tr> <td>P1 Party wall - Ground floor</td> <td>Independently assessed</td> <td>8.46</td> <td>0.04</td> <td>0.04 RCD</td> <td>No</td> </tr> <tr> <td>P2 Party wall - Intermediate floor within a dwelling</td> <td>Table K1 - Default</td> <td>8.46</td> <td>0.00</td> <td>0.00 RCD</td> <td>No</td> </tr> <tr> <td>P4 Party wall - Roof (insulation at ceiling level)</td> <td>Independently assessed</td> <td>8.46</td> <td>0.03</td> <td>0.03 RCD</td> <td>No</td> </tr> </tbody> </table>											Bridge Type	Source Type	Length	Psi	Adjusted Reference:	Imported	E2 Other lintels (including other steel lintels)	Independently assessed	11.24	0.02	0.02 RCD	No	E3 Sill	Independently assessed	8.18	0.02	0.02 RCD	No	E4 Jamb	Independently assessed	26.28	0.02	0.02 RCD	No	E5 Ground floor (normal)	Independently assessed	18.40	0.03	0.03 K	No	E6 Intermediate floor within a dwelling	Independently assessed	18.40	0.00	0.00 RCD	No	E10 Eaves (insulation at ceiling level)	Independently assessed	9.94	0.06	0.06 RCD	No	E12 Gable (insulation at ceiling level)	Independently assessed	8.46	0.04	0.04 RCD	No	E16 Corner (normal)	Independently assessed	10.18	0.04	0.04 RCD	No	E18 Party wall between dwellings	Independently assessed	10.18	0.03	0.03 Knauf	No	P1 Party wall - Ground floor	Independently assessed	8.46	0.04	0.04 RCD	No	P2 Party wall - Intermediate floor within a dwelling	Table K1 - Default	8.46	0.00	0.00 RCD	No	P4 Party wall - Roof (insulation at ceiling level)	Independently assessed	8.46	0.03	0.03 RCD	No
Bridge Type	Source Type	Length	Psi	Adjusted Reference:	Imported																																																																																			
E2 Other lintels (including other steel lintels)	Independently assessed	11.24	0.02	0.02 RCD	No																																																																																			
E3 Sill	Independently assessed	8.18	0.02	0.02 RCD	No																																																																																			
E4 Jamb	Independently assessed	26.28	0.02	0.02 RCD	No																																																																																			
E5 Ground floor (normal)	Independently assessed	18.40	0.03	0.03 K	No																																																																																			
E6 Intermediate floor within a dwelling	Independently assessed	18.40	0.00	0.00 RCD	No																																																																																			
E10 Eaves (insulation at ceiling level)	Independently assessed	9.94	0.06	0.06 RCD	No																																																																																			
E12 Gable (insulation at ceiling level)	Independently assessed	8.46	0.04	0.04 RCD	No																																																																																			
E16 Corner (normal)	Independently assessed	10.18	0.04	0.04 RCD	No																																																																																			
E18 Party wall between dwellings	Independently assessed	10.18	0.03	0.03 Knauf	No																																																																																			
P1 Party wall - Ground floor	Independently assessed	8.46	0.04	0.04 RCD	No																																																																																			
P2 Party wall - Intermediate floor within a dwelling	Table K1 - Default	8.46	0.00	0.00 RCD	No																																																																																			
P4 Party wall - Roof (insulation at ceiling level)	Independently assessed	8.46	0.03	0.03 RCD	No																																																																																			
Y-value																																																																																								
0.02 W/m ² K																																																																																								
18.0 Pressure Testing																																																																																								
Yes																																																																																								
Designed AP ₅₀																																																																																								
5.00 m ³ /(h.m ²) @ 50 Pa																																																																																								
Property Tested?																																																																																								
Yes																																																																																								
Test Method																																																																																								
Blower Door																																																																																								
19.0 Mechanical Ventilation																																																																																								
Mechanical Ventilation																																																																																								
Mechanical Ventilation System Present																																																																																								
No																																																																																								
20.0 Fans, Open Fireplaces, Flues																																																																																								
21.0 Fixed Cooling System																																																																																								
No																																																																																								
22.0 Lighting																																																																																								
No Fixed Lighting																																																																																								
<table border="1"> <thead> <tr> <th>Name</th> <th>Efficacy</th> <th>Power</th> <th>Capacity</th> <th>Count</th> </tr> </thead> <tbody> <tr> <td>Lighting</td> <td>80.00</td> <td>25</td> <td>2000</td> <td>10</td> </tr> </tbody> </table>											Name	Efficacy	Power	Capacity	Count	Lighting	80.00	25	2000	10																																																																				
Name	Efficacy	Power	Capacity	Count																																																																																				
Lighting	80.00	25	2000	10																																																																																				

Summary for Input Data

24.0 Main Heating 1

Percentage of Heat	SAP table	
Database Ref. No.	100.00	%
Fuel Type	0	
SAP Code	Electricity	
In Winter	691	
In Summer	100.00	
Controls SAP Code	336.62	
Delayed Start Stat	2603	
HETAS approved System	No	
Oil Pump Inside	No	
Fan Assisted Flue	No	
Boiler Interlock	No	

25.0 Main Heating 2

Percentage of Heat	Database	
Database Ref. No.	0.00	%
Fuel Type	190006	
SAP Code	Electricity	
In Winter	0	
In Summer	0.00	
Model Name	336.62	
Manufacturer	EDL200UK-630	
Controls	GDC Group Ltd	
Delayed Start Stat	2100	
HETAS approved System	No	
Oil Pump Inside	No	
FI Case	No	
Flue Type	None or Unknown	
Fan Assisted Flue	No	
Flow Temperature	Enter value	

26.0 Heat Networks

None

Heat Source	Fuel Type	Heating Use	Efficiency	Percentage Of Heat	Heat	Heat Power Ratio	Electrical	Fuel Factor	Efficiency type
Heat source 1	None								
Heat source 2	None								
Heat source 3	None								
Heat source 4	None								
Heat source 5	None								

28.0 Water Heating

Water Heating	Main Heating 2
SAP Code	914
Flue Gas Heat Recovery System	No
Waste Water Heat Recovery Instantaneous System 1	No
Waste Water Heat Recovery Instantaneous System 2	No
Waste Water Heat Recovery Storage System	No
Solar Panel	No
Water use <= 125 litres/person/day	Yes
Summer Immersion	No
Cold Water Source	From mains
Bath Count	1

Summary for Input Data

Supplementary Immersion	No
Immersion Only Heating Hot Water	No

28.1 Showers

Description	Shower Type	Flow Rate [l/min]	Rated Power [kW]	Connected	Connected To
Bath	Combi boiler or unvented hot water system	10.00		No	

28.3 Waste Water Heat Recovery System

29.0 Hot Water Cylinder	Internal Store
Cylinder Stat	No
Cylinder In Heated Space	No
Independent Time Control	No
Insulation Type	Measured Loss
Cylinder Volume	201.00
Loss	1.61
In Airing Cupboard	No

31.0 Thermal Store	None
--------------------	------

32.0 Photovoltaic Unit	One Dwelling
Export Capable Meter?	Yes
Connected To Dwelling	Yes
Diverter	No
Battery Capacity [kWh]	0.00

PV Cells kWp	Orientation	Elevation	Overshading	FGHRS	MCS Certificate	Overshading Factor	MCS Certificate Reference	Panel Manufacturer
1.75	South West	45°	None Or Little	No	No	1.00		

34.0 Small-scale Hydro	None
Electricity Generated	0.00
Apportioned	0.00
Connected to dwelling's electricity meter	Yes
Electricity Generation	Annual

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Recommendations

Lower cost measures

None

Further measures to achieve even higher standards


None

Predicted Energy Assessment

Dwelling type: House, Semi-Detached
Date of assessment: 10/06/2024
Produced by: Demi Beneke
Total floor area: 84.14 m²
DRRN:

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP 10 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

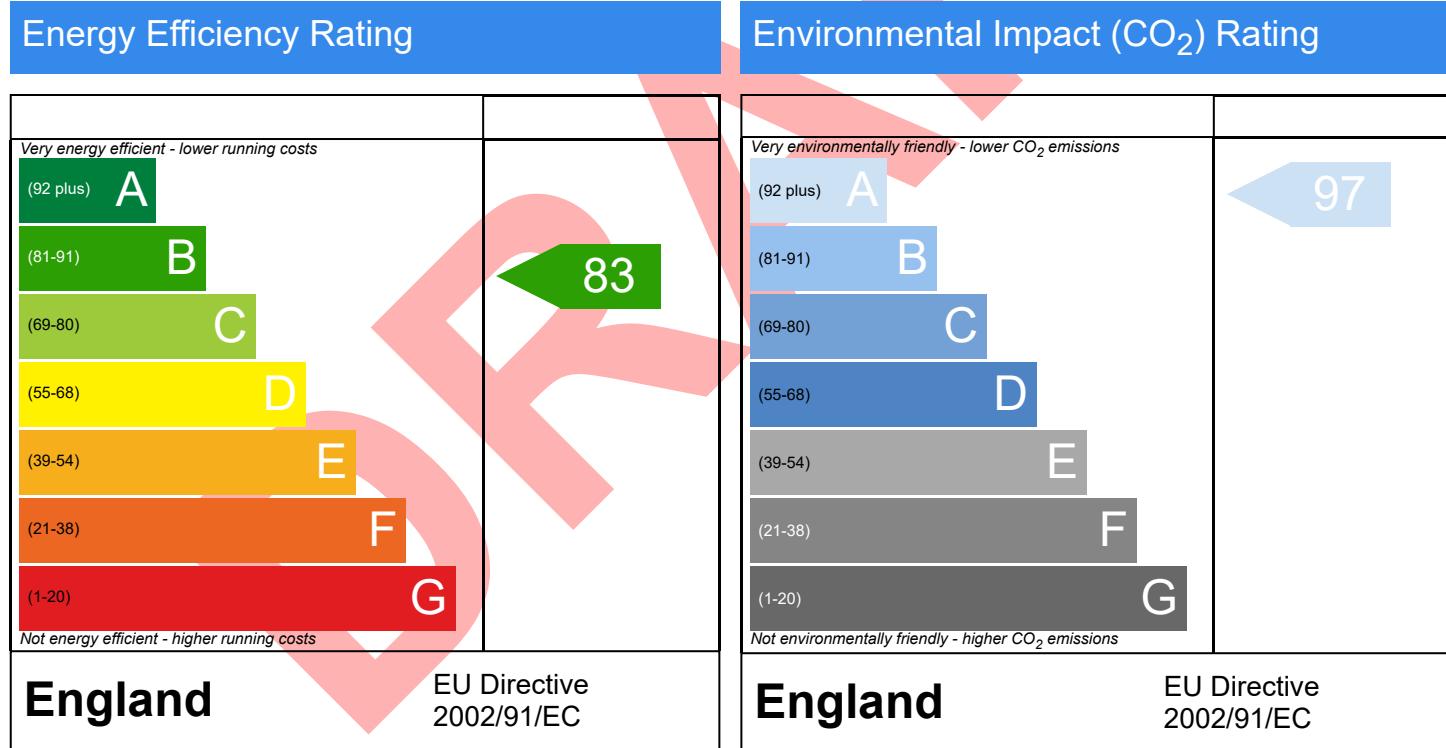

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.