

# PREDICTED ENERGY ASSESSMENT


K, WC, 2B, 1Ba

Dwelling type: Flat, Mid-Terrace  
 Date of assessment: 15/10/2020  
 Produced by: Ross Elliott  
 Total floor area: 72.34 m<sup>2</sup>

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO<sub>2</sub>) emissions.


## Energy Efficiency Rating

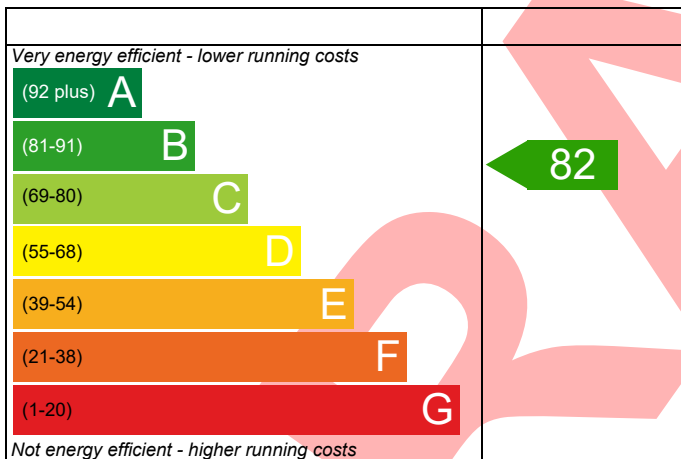

**England** EU Directive 2002/91/EC

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

## Environmental Impact (CO<sub>2</sub>) Rating

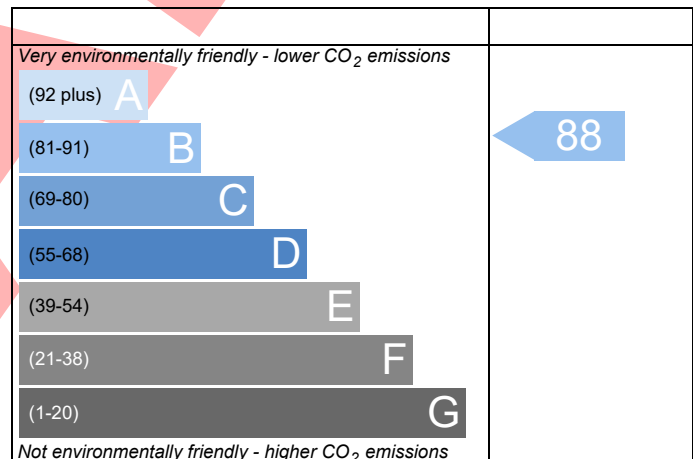

**England** EU Directive 2002/91/EC

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO<sub>2</sub>) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

# BUILDING REGULATION COMPLIANCE

## Calculation Type: New Build (As Designed)



Property Reference	4907-0025-4352-250	Issued on Date	15/10/2020
Assessment Reference	Plot 250	Prop Type Ref	4FF Mid V3 (As)
Property	K, WC, 2B, 1Ba		

SAP Rating	82 B	DER	16.69	TER	19.75
Environmental	88 B	% DER<TER	15.51		
CO <sub>2</sub> Emissions (t/year)	0.97	DFEE	57.82	TFEE	57.36
General Requirements Compliance	Fail	% DFEE<TFEE	-0.81		

Assessor Details	Mr. Andrew McManus, Andrew McManus, Tel: 01455 883250, andrew.mcmanus@aessc.co.uk	Assessor ID	P639-0001
------------------	---	-------------	-----------

Client	
--------	--

### SUMMARY FOR INPUT DATA FOR New Build (As Designed)

#### Criterion 1 – Achieving the TER and TFEE rate

##### 1a TER and DER

Fuel for main heating	Mains gas		
Fuel factor	1.00 (mains gas)		
Target Carbon Dioxide Emission Rate (TER)	19.75	kgCO <sub>2</sub> /m <sup>2</sup>	
Dwelling Carbon Dioxide Emission Rate (DER)	16.69	kgCO <sub>2</sub> /m <sup>2</sup>	Pass
	-3.06 (-15.5%)	kgCO <sub>2</sub> /m <sup>2</sup>	

##### 1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE)	57.36	kWh/m <sup>2</sup> /yr	
Dwelling Fabric Energy Efficiency (DFEE)	57.82	kWh/m <sup>2</sup> /yr	
Excess energy	0.4 (0.7%)	kWh/m <sup>2</sup> /yr	Fail

#### Criterion 2 – Limits on design flexibility

##### Limiting Fabric Standards

##### 2 Fabric U-values

Element	Average	Highest	
External wall	0.22 (max. 0.30)	0.26 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Roof	0.18 (max. 0.20)	0.18 (max. 0.35)	Pass
Openings	1.22 (max. 2.00)	1.36 (max. 3.30)	Pass

##### 2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

##### 3 Air permeability

Air permeability at 50 pascals	4.00 (design value)	m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0	m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	Pass

##### Limiting System Efficiencies

##### 4 Heating efficiency

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

# BUILDING REGULATION COMPLIANCE

## Calculation Type: New Build (As Designed)

Main heating system

Boiler system with radiators or underfloor - Mains gas  
Data from database  
Vaillant ecoFIT sustain 835 VUW 356/6-3 (H-GB)  
Combi boiler  
Efficiency: 89.3% SEDBUK2009  
Minimum: 88.0%

Pass

Secondary heating system

None

### 5 Cylinder insulation

Hot water storage

No cylinder

### 6 Controls

Space heating controls

Time and temperature zone control

Pass

Hot water controls

No cylinder

Boiler interlock

Yes

Pass

### 7 Low energy lights

Percentage of fixed lights with low-energy fittings

100 %

Minimum

75 % Pass

### 8 Mechanical ventilation

Continuous extract system

Specific fan power

0.17

Maximum

0.7 Pass

## Criterion 3 – Limiting the effects of heat gains in summer

### 9 Summertime temperature

Overheating risk (Thames Valley)

Slight

Pass

Based on:

Overshading

Average

Windows facing North East

12.49 m<sup>2</sup>, No overhang

Windows facing South East

5.45 m<sup>2</sup>, No overhang

Air change rate

4.00 ach

Blinds/curtains

None

## Criterion 4 – Building performance consistent with DER and DFEE rate

### Party Walls

Type

U-value

Filled Cavity with Edge Sealing

0.00 W/m<sup>2</sup>K

Pass

Solid Wall

0.00 W/m<sup>2</sup>K

Pass

### Air permeability and pressure testing

#### 3 Air permeability

Air permeability at 50 pascals

4.00 (design value) m<sup>3</sup>/(h.m<sup>2</sup>) @ 50 Pa

Maximum

10.0 m<sup>3</sup>/(h.m<sup>2</sup>) @ 50 Pa Pass

### 10 Key features

Party wall U-value

0.00 W/m<sup>2</sup>K

Party wall U-value

0.00 W/m<sup>2</sup>K

Photovoltaic array

513.15 kWh/Year

*This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.*

# RECOMMENDATIONS

	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating			0	0	Not applicable
Photovoltaic			0	0	Not applicable
Wind turbine			0	0	Not applicable
<b>Totals</b>	<b>£0</b>	<b>£0</b>	<b>B 82</b>	<b>B 88</b>	

**DRAFT**

*This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.*